



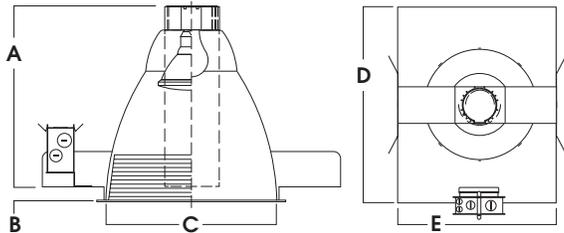

10" OPEN REFLECTOR/BAFFLE

PAR SERIES / 500 WATT MAX INC

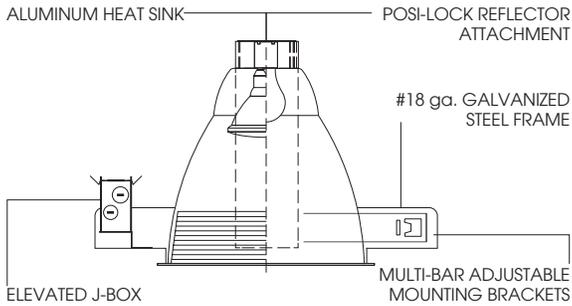

A	B	C	D	E
15.0 381.0 mm	0.6 15.8 mm	12.0 304.8 mm	16.2 411.5 mm	14.0 355.6 mm

SG12IN

APPLICATION

Series features a deep reflector and excellent cutoff.

FEATURES

Efficient reflector design optimized for Incandescent lamps. Posi-lock reflector attachment. Integral 5/8" (0.625) plaster ring. Maximum wattage label (MWL) for low wattage Incandescent or LED lamps. Tool-less ballast access. Multi-bar adjustable mounting brackets.

FINISH

Variety of powdercoat and anodized finishes available on reflector. Eco Black (EB) finish available on frame/ housing.

ELECTRONICS

120 Volt is standard. Use option **T277** for 277V supply feed.

CONSTRUCTION

Frame constructed of 18 ga. galvanized steel. Reflectors spun from .063 high purity aluminum and finished to specification.

LABELS

UL/ETL Listed for Damp locations. Manufactured and tested to UL Standard No. 1598.

SERIES	OPTIONS	TRIM / FINISH	TRIM OPTIONS	FIXTURE LAMPING*										
SG12IN- Spectrum Gold 12" Vertical	BH27 -27" Bar Hangers (Supplied) CB24 -C-Channel Bars CCEA -Chicago Ceiling Plenum CR -Corrosion Resistant T227 -Step Down Transformer 277V to 120V FS -Fuse Holder and Fuse PR -Plaster Ring (Special Depth) TBC -T-bar Clips (Fit BH27) MWL -Max Wattage Label (Specify Wattage) EB -Eco Black Housing Finish	AR1210-SG -Semi-Diffuse Low-Iridescent (Standard) CL -Clear Bright Alzak GO -Gold Alzak HZ -Matte Low Iridescent PW -Pewter Alzak UM -Umber Alzak WE -Wheat Alzak BK -Black Finish WH -White Finish PF -Polished Flange	GS -Gasket BB -Black Micro Baffle WB -White Micro Baffle	<table border="1"> <thead> <tr> <th>LAMP</th> <th>MAX. WATTAGE</th> </tr> </thead> <tbody> <tr> <td>A21</td> <td>200w</td> </tr> <tr> <td>PS25</td> <td>300w</td> </tr> <tr> <td>PAR38</td> <td>250w</td> </tr> <tr> <td>R40¹</td> <td>500w</td> </tr> </tbody> </table> <p>All lamps are medium base (standard) ¹ Specify MG for Mogul Base NOTE: This lamping is for NON-IC only.</p> <p>*For Available Decorative Architectural Trims, Consult Factory.</p>	LAMP	MAX. WATTAGE	A21	200w	PS25	300w	PAR38	250w	R40 ¹	500w
LAMP	MAX. WATTAGE													
A21	200w													
PS25	300w													
PAR38	250w													
R40 ¹	500w													
	¹ For R40 300w thru 500w Only	Note: White Flange is Standard.												

EXAMPLE: SG12IN/ AR1210 SG WB



PROJECT: _____
 TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.