



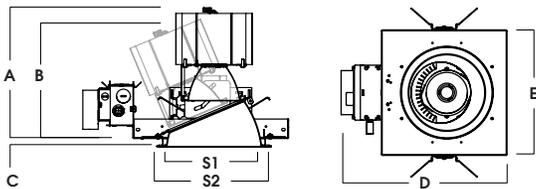

8" ROUND ADJUSTABLE ACCENT BX SERIES / 8000 LUMENS MAX

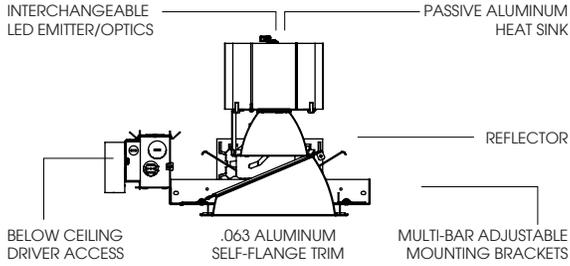

A	B	C	D	E	S1	S2
9.9	9.2	.625	15.9	12.0	7.4	8.9
251.5 mm	233.7 mm	15.9 mm	403.9 mm	304.8 mm	188.0 mm	226.1 mm

Fixture Weight: lbs Ceiling Cutout: Ø 8.0

SGA8BX - TRIM FLANGE / NON-IC RATED

APPLICATION

8" round open aperture deep regressed recessed high output LED adjustable accent for high ceiling illumination in malls, churches and commercial applications.

FEATURES

LED module tilts 35°, rotates 360°. Two-stage optical system for smooth light distribution and focus control. Quick change LED module with interchangeable optics for job site adjustment and fixture maintenance. Tool-less driver and j-box access. Post-lock trim retention torsion springs. May be used for slope ceiling application.

TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available.

ELECTRONICS

LED module features high brightness white Bridgelux® LEDs. 3-step MacAdam Ellipse binning and CRI 80 or 90. 2-step MacAdam Ellipse binning available, consult factory. 1% 0-10V dimming offered standard.


CONSTRUCTION

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Self-flanged one piece trim spun from 0.063" thick high purity aluminum and finished to specification.

CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Complies with CUL. Manufactured and tested to UL standards No. 1598/8750.

LUMENS / WATTAGE DATA (AIMED 20°)		
PART NUMBER	SOURCE LUMENS ¹	SYSTEM WATTS
SGA8BX60L MD	6000	40
SGA8BX70L MD	7000	49
SGA8BX80L MD	8000	58

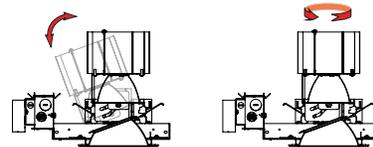

WHILE MAINTAINING CENTER BEAM, LED MODULE TILTS 35° AND ROTATES 360°

SERIES	LUMENS ¹	CCT	OPTICS	DRIVER / VOLTAGE ²	OPTIONS ⁵	TRIM	FINISH	FLANGE FINISH
SGA8BX	60L 6000 Lm	80 CRI	ND 24°	DO10_ 1%, 0-10V	1 120V	BH27 ⁶ 27" Solid Bars	RA8FBX	SG ⁷ Semi-Diffuse
	70L 7000 Lm	27K 2700K	MD 40°	DS2W1 1%, ELV/MLV, 120V	2 277V	H12 12" - 24" Expandable Bars	MW	Matte White
	80L 8000 Lm	30K 3000K	WD 55°	DLTE1 ³ 1% Lutron® 2-Wire Forward Phase, 120V	3 ⁴ 347V	H06 6" - 12" Expandable Bars	MB	Matte Black
		35K 3500K	XW 66°	DL3E_ ³ 1% Lutron® EcoSystem®, Fade		CB24 24" C-Channel Bars	PT	Platinum Silver
		40K 4000K	EL10_ 1%, eldoLED	ED01_ 0.1%, eldoLED		FS Fusing	CH	Charcoal
		90 CRI	DALI_ DALI Control	EB Fixture Painted Black		EM	AC	Anodic Champagne
	27HK 2700K	DMXS_ ^{3/4} DMX Standard Configuration	PR ⁴ Deep Ceiling Extension	EM	AS	Anodic Sapphire		
	30HK 3000K	DMXC_ ^{3/4} DMX Non-Standard Custom	GR Goof Ring	EM	AM	Anodic Malachite		
	35HK 3500K	BLU Bluetooth LE	EM Integral Emergency Battery	EMRM	SN	Sun Gold		
	40HK 4000K		Battery		CO	Copper Metallic		
		Battery Pack		GH	Graphite			
				CC ⁸	Custom Color			
						WF	White Flange	
						MF ⁹	Matching Flange	

EXAMPLE: SGA8BX60L30KMDDO101/BH27/RA8FBXSGMF

NOTES:
 1 Nominal Source Lumens 2 Contact Factory for Additional Options 3 60L Max 4 Contact Factory 5 See Product Options Page for Details 6 Standard Bar Hangers 7 Standard Finish 8 Contact Factory for Special Finishes
 9 Flange Same Color as Inside of Trim



PROJECT: _____
 TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.