
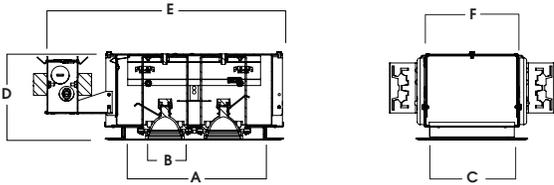


4" MODULAR ACCENT / SHALLOW PLENUM REGRESSED BEVELED FLANGED MR16 SERIES / MULTI-MODULE

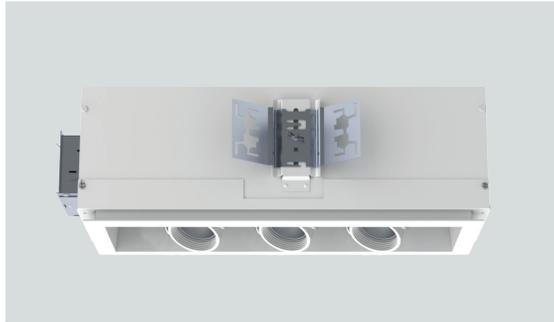

| #OF MODULES | APERTURE | | | H | L | W | CUTOUT |
|-------------|----------|-----|------|-----|------|-----|--------------|
| | A | B | C | | | | |
| 1 | 4.5 | 2.3 | 7.3 | 5.0 | 13.4 | 5.4 | 5.1" x 5.1" |
| 2 | 8.0 | 2.3 | 10.7 | 5.0 | 14.9 | 5.4 | 5.1" x 9.0" |
| 3 | 12.0 | 2.3 | 13.0 | 5.0 | 20.5 | 5.4 | 5.1" x 13.0" |
| 4 | 16.0 | 2.3 | 16.0 | 5.0 | 24.5 | 5.4 | 5.1" x 17.0" |

RC4-DLVRT - REGRESSED BEVELED FLANGED / NON-IC RATED APPLICATION

RC4 series Shallow Plenum MR16 Low Voltage modular fixture for retail, residential and commercial accent lighting.

FEATURES

Regressed Beveled Flanged for clean finished appearance. Fixture available with 1-4 modules. Shallow 5" Plenum Depth. Fixture modules rotate 359°, lock and tilt to 40° for optimal aiming. Easy transformer and j-box access. Multi-bar adjustable mounting brackets. Posi-lock trim attachment. Front loading lamp bezel accepts up to two lens/louwer options. Integral 0.625" collar, with Deep Ceiling Extension (PR) consult factory. Maximum wattage label (MWL) for low wattage Halogen or LED lamps.

TRIM FINISH

A variety of architectural powdercoat finishes for interior of fixture and trim are available.

ELECTRONICS

Electronic 120V transformer is standard. 277V electronic, 120V and 277V LED rated electronic and remote transformer options. High temperature rated porcelain GU10 socket. 37W per lamp max.

CONSTRUCTION

Housing formed #20 gauge galvanized steel, finished to specification. Trim fabricated from aluminum extrusion and finished to specification.

CODE COMPLIANCE

ARRA Compliant. Non-IC rated. ETL/UL/CSA listed for damp locations. Manufactured and tested to UL standards No. 1598.

| SERIES | LAMPS | TRANSFORMER / VOLTAGE | OPTIONS ¹ | INTERIOR | TRIM ⁴ | FINISHES ⁵ |
|-------------------------|-------|--|---|---|---|--|
| RC44DLVRT 1 Module | MR16 | E Electronic Driver E_LED Transformer for Use with LED MR16 Lamps | 1 120V 2 277V | GL16 Clear FG16 Frosted SK16 Linear SO16 Solite Diffusion HL16 Hex Louver SN16 Snoot LN16² Color Lens | MWI White MBI Black PTI Platinum BZI Bronze CCI Custom Color | RT244 4" x 4" RT248 4" x 8" RT2412 4" x 12" RT2416 4" x 16" |
| | | | | | | |
| RC48DLVRT 2 Modules | | | | | | |
| RC412DLVRT 3 Modules | | | | | | |
| RC416DLVRT 4 Modules | | | BH27 27" Flat Bar CB24 24" C-Channel CB48 48" C-Channel MWL(**) Max Wattage Label RTT150E1 150W Remote Transformer RTT300E1 300W Remote Transformer FS Fusing PR³ Deep Plaster Neck | | | |

EXAMPLE: RC48DLVRTMR16E1LED/SO16SN16BH27MBI/RT248MW

NOTES:
 1 See Product Options Page for Details 2 See Lens Options Page for Details 3 Contact Factory 4 Inside Trim And Flange Will Match Color Specified 5 Contact Factory for Special Finishes 6 Standard Finishes

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



| | |
|------------------|--------------|
| PROJECT: | TYPE: |
| CAT. NO.: | |

LED
MR16

