



SARV 3" TRACKLIGHT

THEATRICAL PRO SERIES / 2000 LUMENS

spectrac
track lighting



SARVXT

APPLICATION

SARV 3" Theatrical Pro Series Tracklight for accent, stage, studio and decorative lighting applications.

FEATURES

Top mounted driver fits cove areas. Hinged front door for easy accessories or optics change. Rotates 359° with locking option on TEK series adaptors. Tilts and locks with high friction Teflon bushings. Accepts up to three accessories at once. Passive cooled Zhaga compliant LED module for future maintenance or upgrade. Quick twist LED optics for field adjustment. Track series available with a variety of surface, pendant and cord/clamp mounting.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

CONSTRUCTION


Spun, fabricated and extruded aluminum construction.

ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the module. Base CRI is 83 with 2 MacAdam Ellipse binning. High CRI is 98 with 1 MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

CODE COMPLIANCE

BAA Compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL Standards No. 1598/8750.

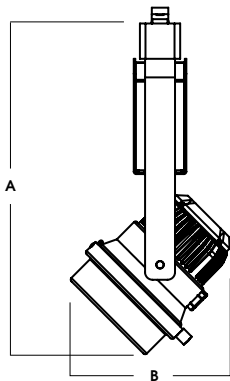

A	B
9.9 251.5 mm	5.3 134.62 mm

WATTAGE / LUMENS DATA

PART NUMBER	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
SARVXT10L	SVT34LEDXT10L	1000	752	9.1	83
SARVXT13L	SVT34LEDXT13L	1300	1013	13.0	78
SARVXT20L	SVT34LEDXT20L	2000	1559	21.7	72

SERIES	LUMENS ¹	CCT	BEAM	DRIVER / VOLTAGE ⁴	ADAPTOR / MOUNTING	FINISH ¹⁰	ACCESSORIES ¹²	
SARVXT	10L	1000 Lm	83 CRI	XN ³ 10° E ⁵	1 120V 2 277V ADAPTOR TEK100 Global TEK 2 CIR/2 NEUT 120V HTEK100 Global TEK 2 CIR/2 NEUT 277V GES66 Global GES 1 CIR/1 NEUT 120V TP3⁷ Global XTSC 3 CIR/1 NEUT 120V, 0-10V Dimmable MOUNTING PC1 Pipe Clamp CP6 6" Straight Cord & Plug CP24 24" Straight Cord & Plug CCP6 6" Coil Cord & Plug CP5 5" Round Surface Mount Canopy (120V/277V) MPT3⁹ Monopoint Canopy PM(xx)⁹ Pendant with Track Adaptor, PC1 or CP5	MW¹¹ Matte White MB¹¹ Matte Black PT¹¹ Platinum Silver CC Custom Color See Page 3 for Full Range of Color Options (83-90102)	LN20¹³ Lens SN20 Shoot BD20 Barn Doors HL20 Hex Louver NSP¹⁴ No Barn Door Springs	
	13L	1300 Lm	27K 2700K					ND 26°
	20L	2000 Lm	30K 3000K	MD 48°				
			35K 3500K	WD 60°				
			40K 4000K	DS2W1 ⁶				
			98 CRI	DS2W1 ⁶				
			27HK 2700K					
			30HK 3000K					
			35HK 3500K					
			40HK 4000K					

EXAMPLE: SARVXT20L35KNDE1/TEK100/MW/BD20

NOTES:
¹ Nominal Source Lumens at Any CCT ² Nominal Delivered Lumens at 83 CRI at Any CCT With ND, No Lens ³ 9mm, 13L Max, All XN Draw More Watts Than Other Optics; See Photometry ⁴ Contact Factory for Additional Options
⁵ 277V Requires HTEK 277V Track and Adaptor ⁶ Requires TP3 Adaptor and XTSC PULSE Track System, 120V Only ⁷ 120V 0-10V Only ⁸ 120V Only / GES66 Adaptor ⁹ See Mounting Options for Pendant Specifications
¹⁰ See Color Page for More Options/Consult Factory for Special Finishes ¹¹ Standard Finishes ¹² Accessory Finish Will Match Fixture ¹³ See Lens Page for Options ¹⁴ Shown with NSP Option



PROJECT: _____
 TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

SARV 3" TRACKLIGHT

THEATRICAL PRO SERIES / FIXTURE OPTIONS

spectrac
track lighting



STANDARD FINISHES

Black adaptor standard for all finishes excluding MW which comes with white adaptor.


MW - MATTE WHITE



MB - MATTE BLACK



PT - PLATINUM

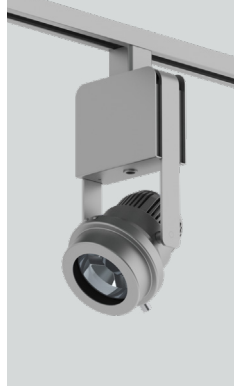


FIXTURE DIMENSIONS

NO BARN DOORS (STANDARD)




0° POSITION

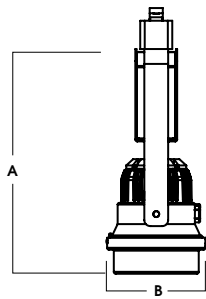


A	B
9.4	4.2
238.8 mm	106.7 mm

45° TILT

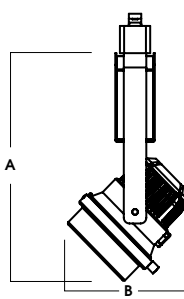

A	B
9.9	5.3
251.5 mm	134.6 mm

90° TILT

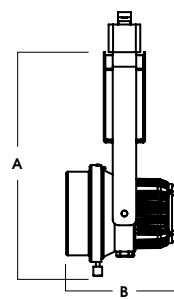


A	B
9.5	4.8
241.3 mm	121.9 mm

BARN DOORS




0° POSITION

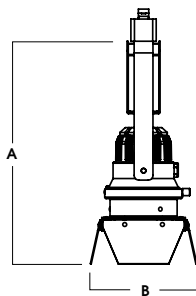


A	B
11.8	5.7
299.7 mm	144.8 mm

45° TILT

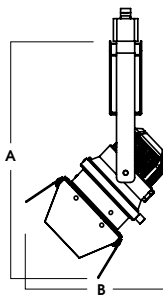

A	B
12.4	7.8
314.9 mm	198.1 mm

90° TILT

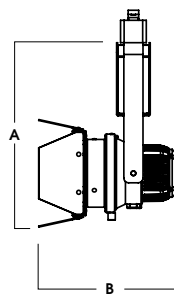

A	B
9.7	7.2
246.4 mm	182.9 mm

COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES / TRACK ADAPTER

FIXTURE COLOR	STANDARD CORD COLOR / TRACK ADAPTER	STANDARD CANOPY / STEM COLOR
Matte White	Matte White	Matte White
Matte Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES

TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	🕒
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES



CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color

