



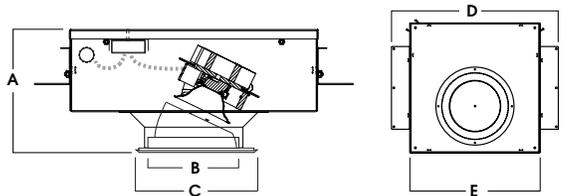

CONCRETE POUR BOX      QUICK CHANGE OPTICS, LED MODULE AND DRIVER FOR MAINTENANCE

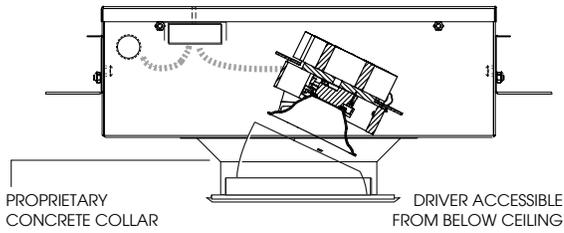

A	B	C	D	E
6.5	5.0	6.25	18.8	14.0
165.1mm	127.0 mm	158.7 mm	477.8 mm	355.6 mm

**CPW5LEDXT**

**APPLICATION**

5" XT LED Wall Wash series intended for concrete pour applications.

**FEATURES**

Proprietary concrete collar and mounting brackets. Two-stage optical system for smooth light distribution and focus control. Quick change LED module with interchangeable optics for job site adjustment and fixture maintenance. Shallow plenum design. Tool-less driver and j-box access. Posi-lock trim retention torsion springs.

**TRIM FINISH**

A variety of architectural powdercoat and anodized finishes are available. Matte White flange is standard.

**ELECTRONICS**

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2 MacAdam Ellipse binning. High CRI is 98 with 1 MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

**CONSTRUCTION**

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Self-Flanged one piece trim spun from 0.063" thick high purity aluminum and finished to specification.

**CODE COMPLIANCE**

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE			
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS <sup>1</sup>	SYSTEM WATTS
CPW5LEDXT10L	CPW5LEDX115W	1000	11.1
CPW5LEDXT13L	CPW5LEDX120W	1300	15.0
CPW5LEDXT20L	CPW5LEDX133W	2000	23.7

SERIES	LUMENS <sup>1</sup>	CCT	OPTICS	DRIVER / VOLTAGE <sup>3</sup>	OPTIONS <sup>4</sup>	TRIM	FINISH	TRIM OPTIONS			
CPW5LEDXT	83 CRI		XN <sup>2</sup> 10° ND 27° MD 40° WD 45° XW 50°	E_ Electronic Driver	1 120V 2 277V	FS Fusing CR Corrosion Resistant	AR5500XT	SG <sup>5</sup> Semi-Diffuse HZ Haze Full Diffuse MW Matte White MB Matte Black AC Anodic Champagne AS Anodic Sapphire PT Platinum Silver OB Oil Rubbed Bronze CH Charcoal AS Anodic Sapphire AM Anodic Malachite SN Sun Gold CO Copper Metallic Graphite AMB Anti Microbial Finish CC <sup>6</sup> Custom Color			
	10L	1000 Lm		27K					2700K	DS10_ 10% 0-10V	PF <sup>7</sup> Polished Flange
	13L	1300 Lm		30K					3000K	DO10_ 1% 0-10V	SKX <sup>8</sup> Linear Wall Wash Lens
	20L	2000 Lm		35K					3500K	DS2W1 1% ELV/MLV, 120V	SOX Micro Prism Solite™ Diffuse Lens
				40K					4000K	DLTE1 1% Lutron® 2-Wire Forward Phase, 120V	SKW Linear Wall Wash Lens Wet Location
										DL3E_ 1% Lutron® EcoSystem®, Fade	
	98 CRI				EL10_ 1%, eldoLED	SOW Micro Prism Solite™ Lens Wet Location					
	10L	1000 Lm	27HK	2700K	ED01_ 0.1%, eldoLED						
	13L	1300 Lm	30HK	3000K	DALI_ DALI Control						
	20L	2000 Lm	35HK	3500K							
			40HK	4000K							

**EXAMPLE:** CPW5LEDXT13L30KWDE1/AR5500XTMW

**NOTES:**  
1 Nominal Source Lumens at Any CCT 2 XN 13L Max at 83 and 98 CRI 3 Contact Factory for Additional Options 4 See Product Options Page for Details 5 Standard Finish 6 Contact Factory for Special Finishes  
7 Flange and Reflector Same Finish 8 Standard Lens



PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.