




SARC 4" SURFACE LIGHT

THEATRICAL PRO SERIES / 2000 LUMENS

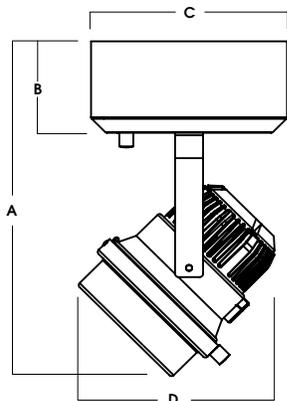

A	B	C	D
9.3 177.8 mm	2.5 63.5 mm	5.25 133.4 mm	5.25 133.4 mm

SARCXT

APPLICATION

SARC 4" Theatrical Pro Series surface light for accent, display and general illumination.

FEATURES

Surface tracklight accepts all Spectrac dimming and control options. Tilts and locks with high friction Teflon bushings. Passive cooled Zhaga compliant LED module for future maintenance or upgrade. Quick twist LED optics for field adjustment.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

CONSTRUCTION

Spun, fabricated and extruded aluminum construction.

ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the module. Base CRI is 83 with 2 MacAdam Ellipse binning. High CRI is 98 with 1 MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE / LUMENS DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
SARCXT10L	1000	922	9.1	101
SARCXT13L	1300	1242	13.0	96
SARCXT20L	2000	1911	21.7	88

SERIES	LUMENS ¹	CCT	BEAM	DRIVER / VOLTAGE ³	MOUNTING	FINISH ⁹	ACCESSORIES ¹¹		
SARCXT	10L 1000 Lm 13L 1300 Lm 20L 2000 Lm	83 CRI	ND 15°	E_ Electronic Driver DS10_ 10% 0-10V Dimming DO10_ 1% 0-10V Dimming ED01_4 .1% 0-10V Dimming DS2W1 ELV MLV 1% Phase Dimming, 120V Only DLTE1⁴ Lutron® 2-Wire Forward Phase (MLV), 120V DL3E_4 1%, Lutron® EcoSystem®, Fades to Black, 120V/277V DALI_4 DALI Control Dimming DMXS⁵ DMX Standard Configuration DMXC⁶ DMX Non-Standard Custom	1 120V 2 277V	RDC5 Round Driver Canopy SDC5 Square Driver Canopy CP13 Large Round Driver Canopy PM⁷ Pendant Mount CQD⁸ DMX Large Driver Canopy	MW¹⁰ Matte White MB¹⁰ Matte Black PT¹⁰ Platinum Silver TW Textured White TB Textured Black MT Textured Silver BZ Bronze OB Oil Rubbed Bronze CH Charcoal GH Graphite AC Champagne SN Sun Gold BR Brecchia Rust AN Anodic Natural CO Copper Metallic CC Custom Color	FG Frosted Face Lens LN20¹² Lens SN20 Shout HL20 Hex Louver BD20 Barn Door NSP No Barn Door Springs	
		27K 2700K	MD 26°						DS10_ 10% 0-10V Dimming
		30K 3000K	WD 40°						DO10_ 1% 0-10V Dimming
	35K 3500K	XW 60°	ED01_4 .1% 0-10V Dimming						
	40K 4000K		DS2W1 ELV MLV 1% Phase Dimming, 120V Only						
	98 CRI		DLTE1⁴ Lutron® 2-Wire Forward Phase (MLV), 120V						
	27HK 2700K		DL3E_4 1%, Lutron® EcoSystem®, Fades to Black, 120V/277V						
	30HK 3000K		DALI_4 DALI Control Dimming						
	35HK 3500K		DMXS⁵ DMX Standard Configuration						
	40HK 4000K		DMXC⁶ DMX Non-Standard Custom						

EXAMPLE: SARCXT10L30KMDE1/RDC5/MT/FG

NOTES:

1 Nominal Source Lumens at Any CCT 2 Nominal Delivered Lumens at 83 CRI at Any CCT With ND, No Lens 3 Contact Factory for Additional Options 4 CP13 Required 5 DMXS - Phoenix Connectors, Logarithmic Dimming, Requires DMX Signal to Turn On, 8-bit Network Resolution, Address of 1, Will Dim to Dark, See DMX Guide 6 DMXC - For Alternate Dim Curves, Addressing, Preset DMX Settings or Special Mounting, Contact quotes@speclight.com or Your Local Representative, See DMX Guide 7 Specify Length in Inches; See Mounting Page for Available Lengths 8 CQD Replaces RDC5/SDC5/CP13 9 See Color Page for More Options/Consult Factory for Special Finishes 10 Standard Finishes 11 Accessory Finish Will Match Fixture 12 See Lens Page



PROJECT: _____
TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

SARC 4" SURFACE LIGHT

THEATRICAL PRO SERIES / FIXTURE OPTIONS

spectrac
track lighting



STANDARD FINISHES

MW, MB, PT standard fixture finishes. Black adaptor standard for all finishes excluding MW which comes with white adaptor.

MW - MATTE WHITE



MB - MATTE BLACK



PT - PLATINUM




FIXTURE DIMENSIONS

NO BARN DOORS (STANDARD)




0° POSITION




A	B
8.6	4.6
218.4 mm	116.8 mm

45° TILT



A	B
9.2	5.3
233.7 mm	134.6 mm

90° TILT




A	B
8.7	4.7
221.0 mm	119.4 mm

BARN DOORS WITH CP13 OPTION




0° POSITION

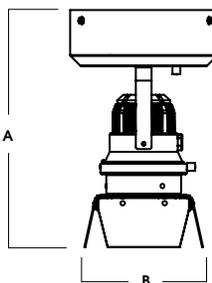


A	B
11.3	5.7
287.0 mm	144.8 mm

45° TILT

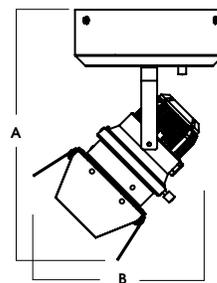

A	B
11.8	7.8
299.7 mm	198.1 mm

90° TILT

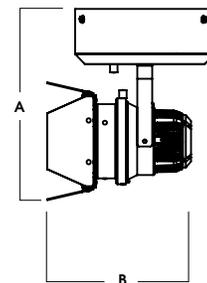

A	B
9.2	7.2
233.7 mm	182.9 mm

SARC 4" SURFACE LIGHT


THEATRICAL PRO SERIES / MOUNTING OPTIONS

spectrac
track lighting




DRIVER CANOPY OPTIONS


RDC5 - SMALL DRIVER CANOPY (STANDARD)



CP13 - LARGE DRIVER CANOPY

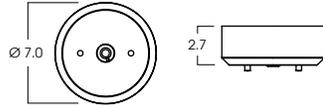


SDC5 - SQUARE DRIVER CANOPY




DMX OPTION

CQD - LARGE DRIVER CANOPY FOR DMX OPTIONS



MOUNTING TYPES

PM*
RIGID PENDANT MOUNT
RIGID 5/8" OD STEM - 3/8" IP



ORDER: **PM** (Length)
SPECIFY LENGTH:
PM3 - 3" **PM24** - 24"
PM6 - 6" **PM36** - 36"
PM12 - 12" **PM48** - 48"
PM18 - 18" **PM72** - 72"
PMLC(XX)
Custom Length
(Specify in Inches)

*MAXIMUM ONE PIECE STEM LENGTH IS 72".
LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.

