

# TWY7

## 7" WALL WASH TRACK LUMINAIRE

Wide Flood 105° x 97° wall wash track or monopoint luminaire with up to 5200 lumens delivered.

### LUMENS / WATTAGE DATA


PART NUMBER	DELIVERED LUMENS	SYSTEM WATTS	LPW
TWY7 25L	2483	19.3	129
TWY7 35L	3386	27.1	125
TWY7 50L	5329	41	130

<sup>1</sup>Nominal Delivered Lumens at 50L 35Kxx BET MW

PROJECT: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

TYPE: \_\_\_\_\_

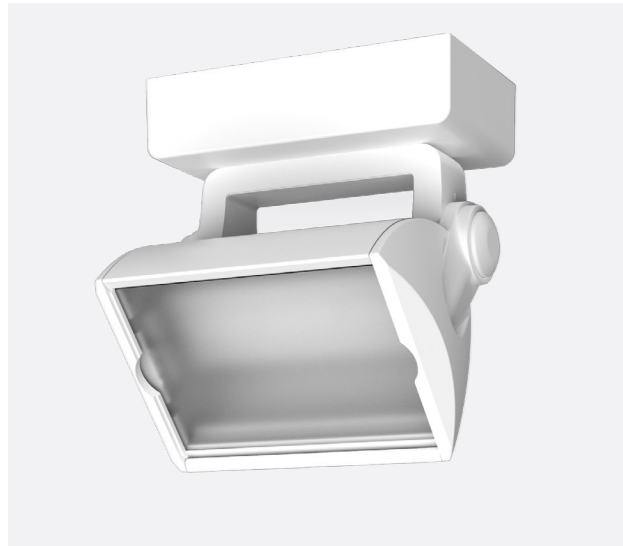

### SERIES

Wide Flood 105° x 97° wall wash track or monopoint luminaire with up to 5300 lumens delivered.

180° of vertical tilt with degree indexing.

350° horizontal rotation.

Soft etch lens for visual comfort and protection of LED from dust.

For use with Spectrum BET Basix track system (Juno Compatible)

### LISTING

cULus Certified. Suitable for dry locations.

### PRODUCT SELECTOR GUIDE

SERIES	FAMILY	LUMENS	CCT	DIMMING	ADAPTOR	FINISH	ACCESSORIES
TW	Y7	50L		E1	BET		+ <input type="text"/>

#### EXAMPLE

TW	Y7	50L	35K	E1	BET	MW	+ <input type="text"/>
----	----	-----	-----	----	-----	----	------------------------

SERIES	FAMILY	LUMENS	CCT	DIMMING	ADAPTOR	FINISH	ACCESSORIES
<ul style="list-style-type: none"> <li>TW</li> </ul>	<ul style="list-style-type: none"> <li>Y7 7" Wall Wash</li> </ul>	<ul style="list-style-type: none"> <li>25L 2500 Lm</li> <li>35L 3500 Lm</li> <li>50L 5300 Lm</li> </ul> <p><sup>1</sup>Nominal Delivered Lumens</p>	<ul style="list-style-type: none"> <li>80 CRI</li> <li>30K 3000K</li> <li>35K 3500K</li> <li>40K 4000K</li> </ul>	<ul style="list-style-type: none"> <li>E1 Electronic Low-Voltage (ELV) , 120V</li> </ul>	<ul style="list-style-type: none"> <li>BET Basix 1 CIR/1 NEUT 120V</li> </ul>	<ul style="list-style-type: none"> <li>MW Matte White</li> <li>MB Matte Black</li> </ul>	<p>ORDER SEPARATELY</p> <ul style="list-style-type: none"> <li>BET70WH Mono Point Canopy White</li> </ul>


**DLC PREMIUM LISTED OPTIONS**



COPYRIGHT 2023 SPECTRUM LIGHTING, INC.


FIXTURE DIMENSIONS

0° POSITION




A	B
76	4.84
194.1 mm	122.9 mm

45° TILT

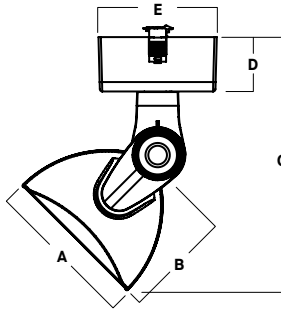


A	B	C	D	E
4.84	3.14	8.25	1.77	3.86
122.9 mm	79.8 mm	209.6 mm	45.0 mm	98.0 mm

90° TILT



A	B
6.25	5.75
158.7 mm	145.9 mm

SIDE VIEW



A	B
6.89	7.11
175.0 mm	180.7 mm


FIXTURE ACCESSORIES

BET70WH  
MONO POINT CANOPY




TWY7 50L 35K xx BET MW


CANDLEPOWER CURVE TEST SP-01383	PERFORMANCE SUMMARY	REFERENCE DIAGRAM
------------------------------------	---------------------	-------------------

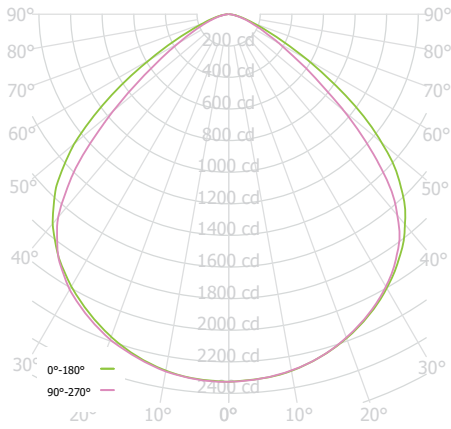


Delivered Lumens: 5329  
 Luminaire Watts: 41  
 LER: 129.98  
 CP at Odeg (Nadir): 2326  
 CRI: 80+  
 Lumen Multiplier: N/A, only 50L tested  
 CCT Multiplier: 40K x 1.0, 50K x 1.0

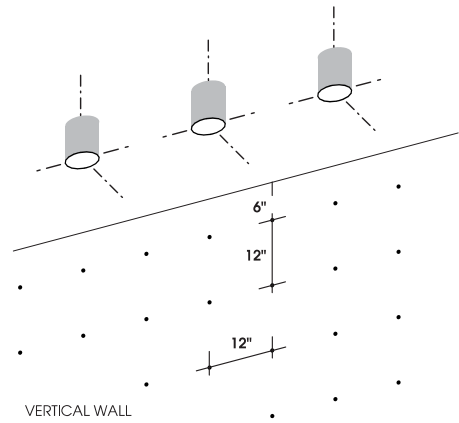


PERFORMANCE DATA - INITIAL ILLUMINATION (FOOTCANDLES) ON WALL - DIRECT LIGHT ONLY - AIMED AT 0°

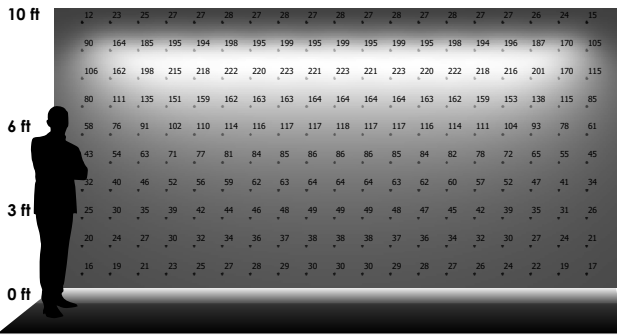


9 LUMINAIRES  
 2' - 0" away from wall  
 2' - 0" between luminaires

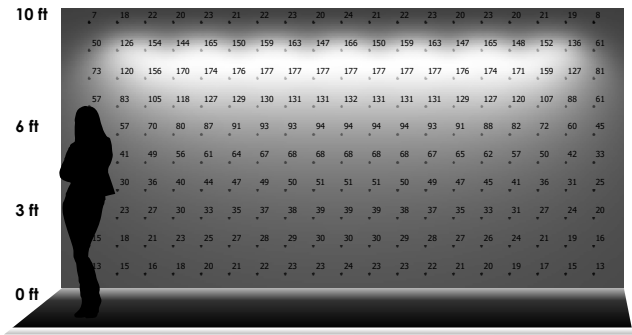

7 LUMINAIRES  
 2' - 6" away from wall  
 2' - 6" between luminaires

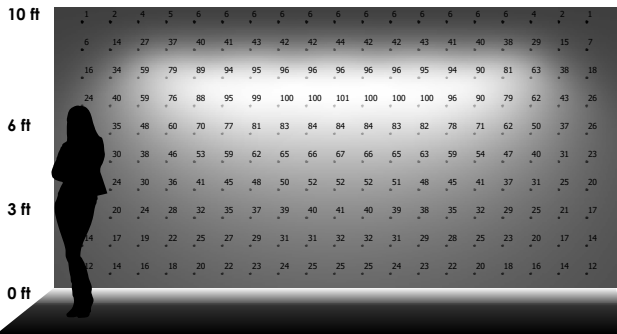

5 LUMINAIRES  
 3' - 0" away from wall

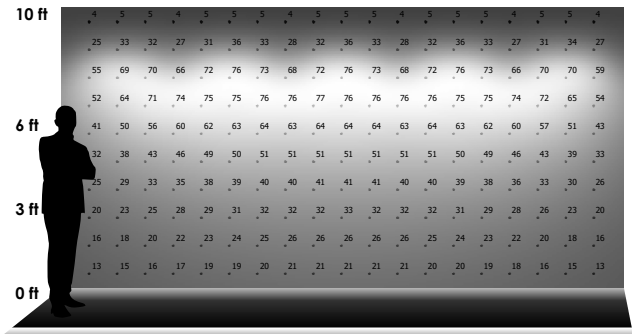

5 LUMINAIRES  
 3' - 0" away from wall

COPYRIGHT 2023 SPECTRUM LIGHTING, INC.