



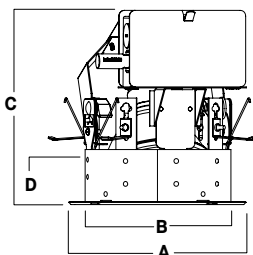

RETROFIT ADJUSTABLE DOWNLIGHT

PAR38 SERIES / INCANDESCENT

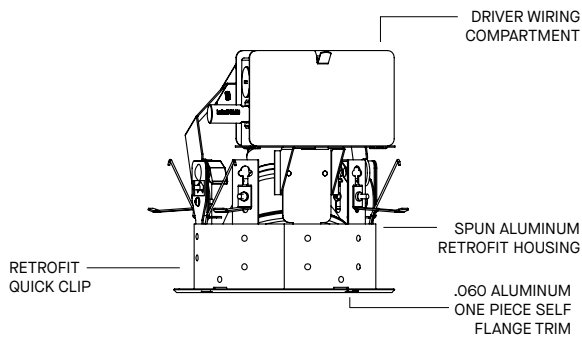

| HOLE SIZE | APERTURE | DEPTH | HOUSING |
|-----------|----------|-------|---------|
| A | B | C | D |
| 7.75 | 5.51 | 8.49 | 2.6 |

SGRTA6INC

APPLICATION

6" Round adjustable retrofit accent PAR38 fixture for general downlighting.

FEATURES

Designed for retrofit into existing fixture, or remodel where no fixture exists. Tool-less access. One piece-self-flanged trim. Intended for Non-IC retrofit. Goof ring available for oversized or damaged ceiling installations. Posi-lock trim retention torsion springs. Designed for 0.5" - 1" thick ceilings. Contact factory for ceiling applications (over 1").

FINISH

Variety of powdercoat and anodized finishes available.

ELECTRONICS

120 Volt is standard. Use option T277 for 277v supply feed.

CONSTRUCTION


Housing/frame constructed of .060 aluminum to resist corrosion. Self flanged one piece trim spun from 0.060" thick high purity aluminum and finished to specification.

INSTALLATION

Goof rings available for rough or OB-Round holes. Integral retrofit quick mount clips. Optional clips, springs and extended whips available (See options and installation details).

LABELS

ARRA Compliant. UL/ETL Listed for Damp location. Manufactured and tested to UL standard No. 1598.



WHILE MAINTAINING CENTER BEAM, MODULE TILTS 35° AND ROTATES 360°
 MUST REMOVE FROM CEILING TO ADJUST TILT AND ROTATION

| SERIES | LAMP | OPTIONS | TRIM / FINISH | TRIM OPTIONS |
|-----------|-------|--|---|--|
| SGRTA6INC | PAR38 | WP16- 16" Whip WP27- 27" Whip CR- Corrosion Resistant FS- Fuse Holder and Fuse GR- Goof Ring T277- Step Down Transformer GU24- GU24 Base Option MWL*- Maximun Wattage Label * Specify Wattage RM2.75D- Special Deep Ceiling Adaptor | AR6500- 6" Adjustable MW- Matte White SG- Semi-Diffuse Low Iridescent CL- Specular Alzak HZ- Matte Low Iridescent MB- Matte Black PT- Platinum PF- Polished Flange WE- Wheat Alzak CC- Custom Color | SO- Micro Prism Solite™ Lens Standard GL- Clear Glass Lens FG- Frosted Glass Lens WL- Wet Location |
| | | *See Product Options Page For Ordering, Detail and Specifications | Matte White Flange Standard | |

EXAMPLE: SGRTA6INC/PAR38/RM2.75D/AR6500 SG

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



| | |
|-----------|-------|
| PROJECT: | TYPE: |
| CAT. NO.: | |

