

TWA5 BET

5" WALL WASH TRACK LUMINAIRE

TWA5 fixture is a 64° wide flood wall wash track or monopoint luminaire with up to 2,970 lumens delivered.

LUMENS / WATTAGE DATA

| PART NUMBER | DELIVERED LUMENS* | SYSTEM WATTS | LPW |
|--------------|-------------------|--------------|-----|
| TWA5 30L BET | 2983 | 27 | 110 |

*1 Nominal Delivered Lumens

FEATURES

80+ CRI with 3 Step MacAdam color binning.
 135° of vertical tilt.
 350° horizontal rotation.
 Soft etch lens for visual comfort and protection of LED from dust.
 For use with Spectrum BET Basix track system (Juno Compatible).

LISTING

ETL Listed for dry location.

Manufactured and tested to UL standards No. 1574.

WARRANTY

5 Year warranty standard. L70>60,000 hours.

PROJECT: _____

QUANTITY: _____

TYPE: _____



PRODUCT SELECTOR GUIDE

| SERIES | FAMILY | LUMENS | CCT | DIMMING | ADAPTOR | FINISH |
|--------|--------|--------|-----|---------|---------|--------|
| TW | A5 | 30L | | E1 | BET | |

EXAMPLE

| | | | | | | |
|----|----|-----|-----|----|-----|----|
| TW | A5 | 30L | 35K | E1 | BET | MW |
|----|----|-----|-----|----|-----|----|


| SERIES | FAMILY | LUMENS | CCT | DIMMING | ADAPTOR | FINISH |
|--------|-------------------|---------------|------------------------------|---|-------------------------------|--------------------------------------|
| TW | A5 - 5" Wall Wash | 30L - 2970 Lm | 30K - 3000 K 35K - 3500 K | E1 - Electronic Low-Voltage (ELV)/TRIAC, 120V | BET - Basix 1 CIR/1 NEUT 120V | MW - Matte White MB - Matte Black |

GREEN TEXT INDICATES QUICK SHIP OPTIONS



COPYRIGHT 2023 SPECTRUM LIGHTING, INC.


FIXTURE DIMENSIONS

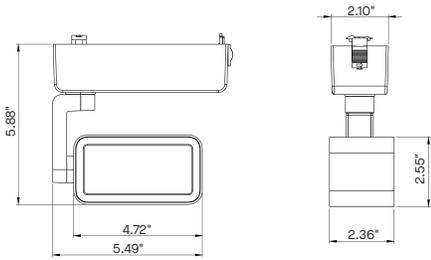


TW - A5 - 30L - 30K - xx - xx - MW

| CANDLEPOWER CURVE TEST TWA5-1 | PERFORMANCE SUMMARY | REFERENCE DIAGRAM |
|----------------------------------|---|-------------------|
| | Delivered Lumens: 2983 Luminaire Watts: 27.01 LER: 110.44 CP at 0deg (Nadir): 2723 CRI: Lumen Multiplier: CCT Multiplier: | |


PERFORMANCE DATA - INITIAL ILLUMINATION (FOOTCANDLES) ON WALL - DIRECT LIGHT ONLY

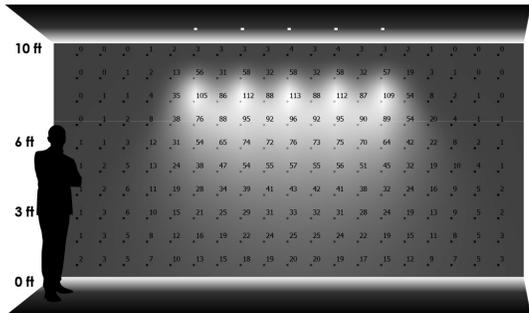


THREE LUMINAIRES
2'-0" away from wall
4'-0" on center

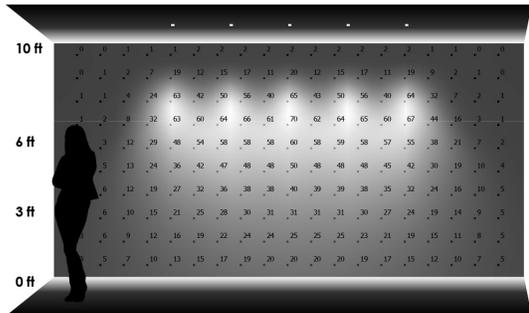

THREE LUMINAIRES
2'-6" away from wall
4'-0" on center

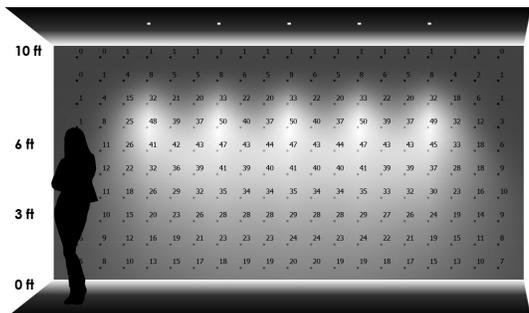


THREE LUMINAIRES
3'-0" away from wall
4'-0" on center

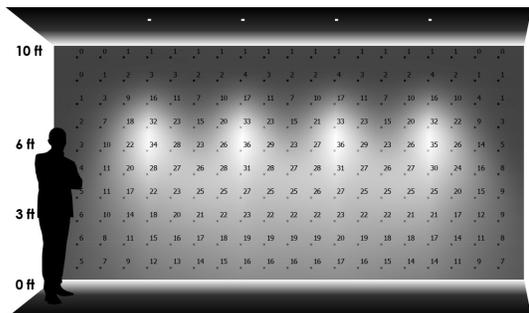


THREE LUMINAIRES
3'-6" away from wall
4'-0" on center


TW - A5 - 30L - 30K - xx - xx - MW

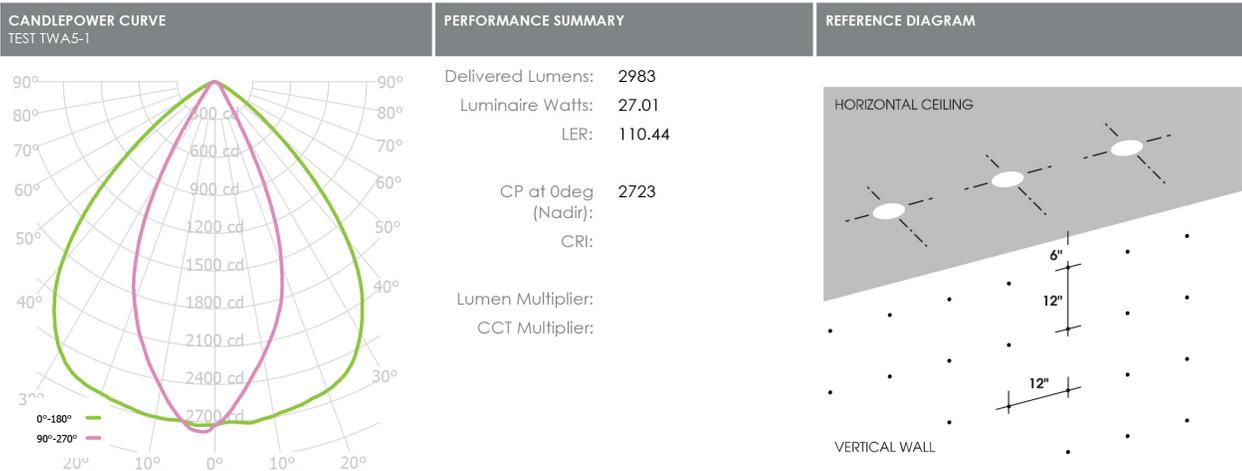


PERFORMANCE DATA - INITIAL ILLUMINATION (FOOTCANDLES) ON WALL - DIRECT LIGHT ONLY

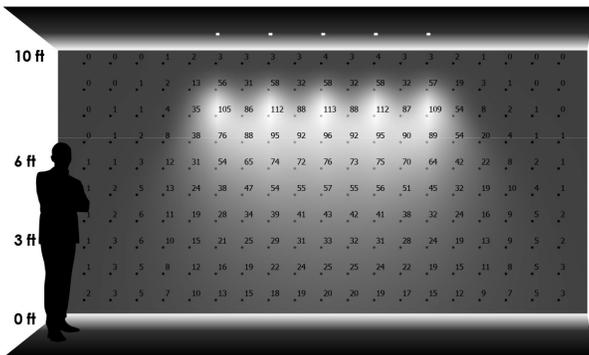


THREE LUMINAIRES
2'-0" away from wall
4'-0" on center

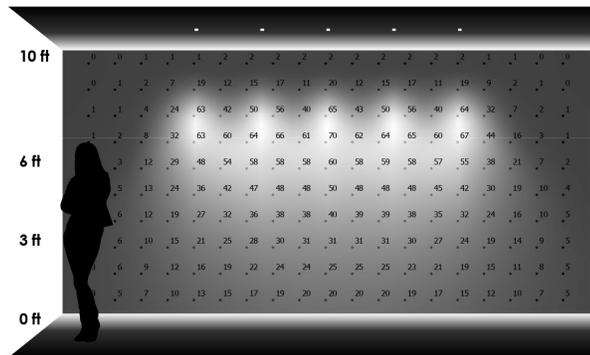

THREE LUMINAIRES
2'-6" away from wall
4'-0" on center

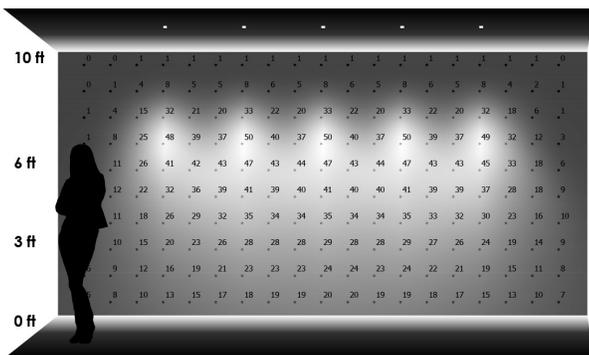

THREE LUMINAIRES
3'-0" away from wall
4'-0" on center

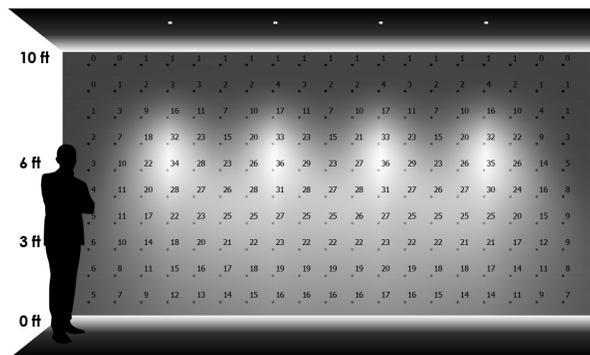

THREE LUMINAIRES
3'-6" away from wall
4'-0" on center