




**CONTEMPORARY WALL
SCNCE
DAMP LOCATION
FM SERIES**

PROJECT: _____
 QUANTITY: _____ TYPE: _____

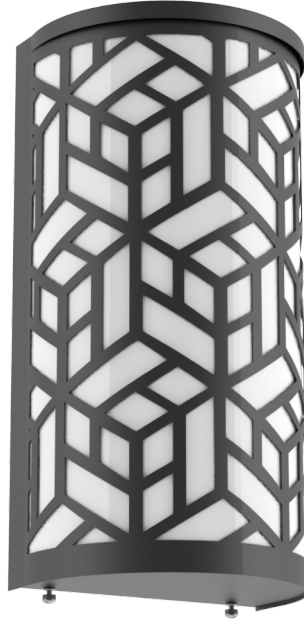

WSC0816FM
RWBX- Rubix



WSC0816FM
BGLW - Bungalow



WSC0816FM
NIC - Intersecting Circles



WSC0816FM
BAND - Two Band Classic



WSC0816FM
CUST - Custom

SERIES	LUMENS ¹		CCT	DRIVER / DIMMING ²		STYLE	OPTIONS ³		MOUNTING ⁴		FINISH ⁵		
WSC0816FM	10L	1000 Lm	27K	2700K	EX Electronic Driver, 120V/277V DS10X 10%, 0-10V, 120V/277V DS2W1 ELV / MLV, 120V	RWBX	WL Wet Location BCV Top / Bottom Cover for No End Light	WM	Wall Mount	MW ⁶ Matte White MB ⁶ Matte Black PT ⁶ Platinum TW Textured White TB Textured Black MT Textured Silver BZ Bronze OB Oil Rubbed Bronze CH Charcoal GH Graphite AC Champagne SN Sun Gold BR Brecchia Rust AN Anodic Natural CO Copper Metallic CC Custom Color			
	20L	2000 Lm	30K	3000K		BGLW							Bungalow
	35K	3500K	40K	4000K		INTC							Intersecting Circles
						BAND							Two Band Classic
						CUST	Custom (Submit Logo or Image to Spectrum Lighting)						

EXAMPLE: WSC0816FM10L35KEXRWBXWMMB


NOTES:
 1 Nominal Source Lumens At Any CCT 2 Contact Factory for Additional Options 3 See Product Options Page for Details
 4 See Mounting Page for Details on Components and Finishes 5 Contact Factory for Special Finishes 6 Standard Finishes





**CONTEMPORARY WALL
SCONCE**
DAMP LOCATION
FM SERIES

HOUSING DIMENSIONS

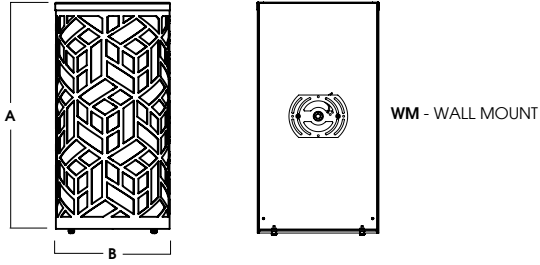

A	B
16.2 411.5 mm	8.2 208.3 mm

APPLICATION

Wall Sconce Series for decorative wall accent lighting.

FEATURES

Speclume series fixtures offers contemporary style with functional luminaire performance. All fixtures are designed and manufactured in our factory. Custom designs available, contact factory.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

ELECTRONIC

LED module features high brightness white LEDs, 3-step MacAdam Ellipses binning and CRI 84 minimum. Variety of electronic: 120v/277v and dimming drivers.

CONSTRUCTION

Fixture housing is fabricated 5052 H32 aluminum construction to resist corrosion. Acrylic is UV stabilized formed matte white opal.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. ADA Compliant. Wet location available. Manufactured and tested to UL standards No. 1598/8750.



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES


TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⓪
Tier 2 - Typical Finishes	\$\$	⓪⓪
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES



TIER 2 - TYPICAL FINISHES

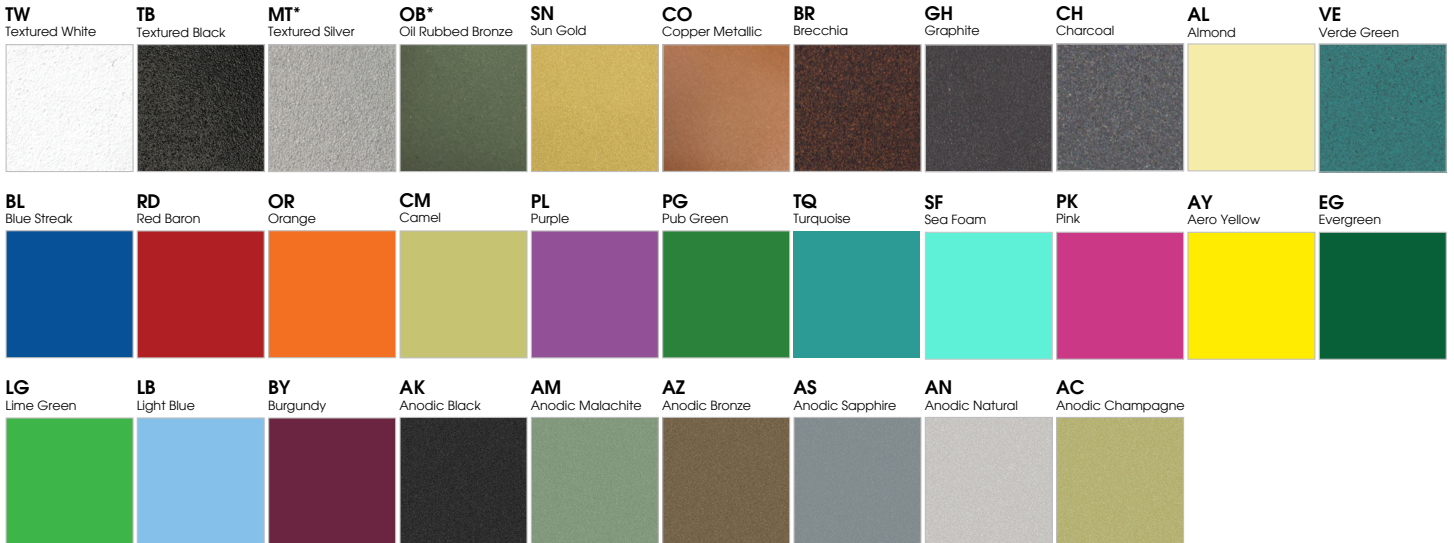

CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

