# 4" ROUND DIRECT / INDIRECT
## FOCUSED ILLUMINATION

**cylinders**

## C0411UDXT - 2 CABLE MOUNT WITH CORD

### APPLICATION
4" round x 11" high mini cylinder luminaire for direct / indirect illumination.

### FEATURES
Spectrum's Cylinder series provides traditional architectural style with high performance and energy efficient illumination. Rugged design with flexible mounting, finish and LED options make these extremely versatile fixtures. Interchangeable optics for job site flexibility and fixture upgrade.

### FINISH
Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes. All exposed materials are chromate pretreated to resist corrosion.

### ELECTRONICS
LED system features Xicato LED module with proprietary phosphor technology that provides consistent stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1 x 2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

### CONSTRUCTION
Fabricated seamless aluminum fixture housing, specular primary reflector provides high efficiency illumination. Stainless steel hardware with galvanized brackets to resist corrosion. Machined aluminum trims finished to specification.

### CODE COMPLIANCE
BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.
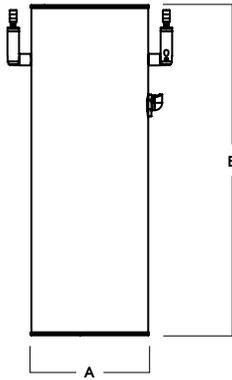
| LUMENS / WATTAGE DATA | | |
|---|---|---|
| **PART NUMBER** | **SOURCE LUMENS**[1] | **SYSTEM WATTS** |
| C0411UDXT7L | 1400 | 12.4 |
| C0411UDXT10L | 2000 | 18.2 |
| C0411UDXT13L | 2600 | 26.0 |

| A | B |
|---|---|
| 4.0 | 11.2 |
| 101.6 mm | 284.5 mm |

| SERIES | LUMENS[1/2] | | CCT | | OPTICS | | | DRIVER / DIMMING[4] | | LENS | | MOUNTING[7] | | FINISH[9] | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C0411UDXT | 7L | 700 Lm | 83 CRI | | UPLIGHT[3] | | DOWNLIGHT | EX | Electronic Driver, 120V/277V | DOWNLIGHT | | CD2X4R[8] | 2 Cable Mount with Cord | MW[10] | Matte White |
| | 10L | 1000 Lm | 27K | 2700K | ND | 21° | ND 21° | DS10X | 10%, 0-10V, 120V/277V | NL | No Lens | | | MB[10] | Matte Black |
| | 13L | 1300 Lm | 30K | 3000K | MD | 38° | MD 38° | DO10X | 1%, 0-10V, 120V/277V | GL[5] | Clear Glass Lens | | | PT[10] | Platinum Silver |
| | | | 35K | 3500K | WD | 44° | WD 44° | DS2W1 | ELV/MLV, 120V | SO[6] | Micro Prism Solite™ Lens | | | CC | Custom Color |
| | | | 40K | 4000K | | | | | | | | | | | |
| | | | 98 CRI | | | | | | | | | EMERGENCY BATTERY OPTIONS | | See Page (3) for Full Range of Color Options (83-90095) | |
| | | | 27HK | 2700K | | | | | | | | EMCR | 10W Canopy Mounted EM | | |
| | | | 30HK | 3000K | | | | | | | | EMRM | 7W Remote EM | | |
| | | | 35HK | 3500K | | | | | | | | EMEN | 7W Remote with Enclosure | | |
| | | | 40HK | 4000K | | | | | | | | | | | |

**EXAMPLE**: C0411UDXT10L35KMDWDEX/SO/CD2X4R36/MW

**NOTES:**
**1** Nominal Source Lumens at Any CCT   **2** Uplight & Downlight Use The Same Lumen Output   **3** ¼" Clear Glass Only   **4** Contact Factory for Additional Options   **5** Standard Lens for ND   **6** Standard Lens for MD, WD
**7** See Mounting Page for Details on Components and Finishes   **8** Specify Length in Inches: See Mounting Page for Available Lengths   **9** See Color Page for More Options/Consult Factory for Special Finishes   **10** Standard Finishes

**SPECTRUM LIGHTING INC.**

PROJECT: _____

TYPE: _____

ETL • INTERTEK LISTED • 5 YEAR WARRANTY • MADE IN THE USA

# 4" ROUND DIRECT / INDIRECT
## FOCUSED ILLUMINATION / FIXTURE OPTIONS

**cylinders**

## STANDARD FINISHES

**MW**
MATTE WHITE

**MB**
MATTE BLACK

**PT**
PLATINUM SILVER

---

## MOUNTING TYPES

**CD2X4R**
2 CABLE MOUNT WITH CORD
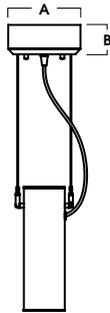
| A | B |
|---|---|
| 7.0 | 2.8 |
| 177.8 mm | 71.1 mm |

## EMERGENCY BATTERY OPTIONS

**EMCR -** LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY

Ø 9.0        3.25
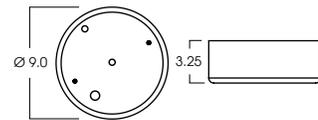
## REMOTE EMERGENCY BATTERY OPTIONS

**EMRM\* -** 7W REMOTE EMERGENCY BATTERY (50' MAX)

| A | B | C |
|---|---|---|
| 1.3 | 12.6 | 13.0 |

**EMEN\* -** 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)

| A | B | C |
|---|---|---|
| 2.0 | 17.0 | 6.2 |

\*OTHER EM BATTERY SIZES AVAILABLE, CONSULT FACTORY

# COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
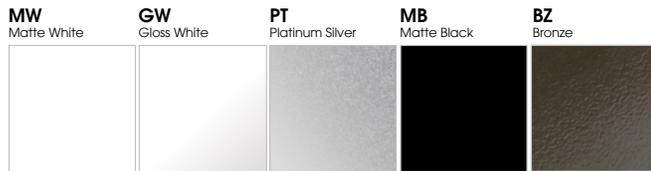SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.

**SPECTRUM**
POWDER COAT COLORS

## STANDARD CORD / STEM / CANOPY FINISHES

| FIXTURE COLOR | STANDARD CORD COLOR | STANDARD CANOPY / STEM COLOR |
|---|---|---|
| Matte White, Textured White | Matte White | Matte White |
| Gloss White | Matte White | Gloss White |
| Matte Black, Textured Black | Matte Black | Matte Black |
| All Others | Matte Black | Same Color as Fixture |
| Custom Color | Contact Factory | Contact Factory |

## PAINT TIMES

| TIER | COST | AVERAGE PAINT TIME* |
|---|---|---|
| Tier 1 - Standard Finishes | $ | 🕐 |
| Tier 2 - Typical Finishes | $$ | 🕐🕐 |
| Custom Color | Contact Factory | Contact Factory |

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

## TIER 1 - STANDARD FINISHES

| MW | GW | PT | MB | BZ |
|---|---|---|---|---|
| Matte White | Gloss White | Platinum Silver | Matte Black | Bronze |

## TIER 2 - TYPICAL FINISHES

| TW | TB | MT* | OB* | SN | CO | BR | GH | CH | AL | VE |
|---|---|---|---|---|---|---|---|---|---|---|
| Textured White | Textured Black | Textured Silver | Oil Rubbed Bronze | Sun Gold | Copper Metallic | Brecchia | Graphite | Charcoal | Almond | Verde Green |

| BL | RD | OR | CM | PL | PG | TQ | SF | PK | AY | EG |
|---|---|---|---|---|---|---|---|---|---|---|
| Blue Streak | Red Baron | Orange | Camel | Purple | Pub Green | Turquoise | Sea Foam | Pink | Aero Yellow | Evergreen |

| LG | LB | BY | AK | AM | AZ | AS | AN | AC |
|---|---|---|---|---|---|---|---|---|
| Lime Green | Light Blue | Burgundy | Anodic Black | Anodic Malachite | Anodic Bronze | Anodic Sapphire | Anodic Natural | Anodic Champagne |

## CUSTOM COLOR FINISHES

CONTACT FACTORY

**CC**
Custom Color

CC

*UNAVAILABLE FOR WET LOCATION