





# 9" ROUND REMODEL PLATFORM

## XT SERIES / 5000 LUMENS MAX

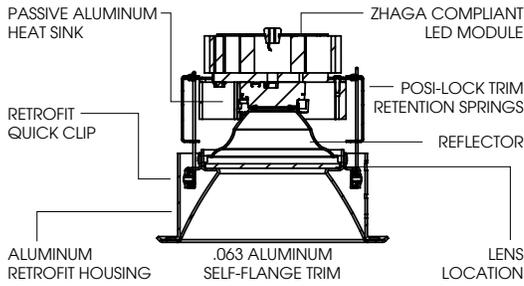

FIT SIZE	
SERIES	9"
MINIMUM	8 <sup>11/16</sup>
MAXIMUM	9 <sup>7/16</sup>

A	B	C
9.0	10.1	10L-20L: 6.8
228.6 mm	256.5 mm	30L: 7.5
		40L-50L: 7.3

Ceiling Cutout: Ø 8.7"

### SGRTE9XT - TRIM FLANGE / NON-IC RATED

#### APPLICATION

Round XT focused illumination series LED downlight for high performance retrofit or remodel application.

#### FEATURES

Remodel round downlight housing designed for install in finished "hard" ceiling or into existing precut hole. Quick mount remodel spring clips with mechanical lock down. Return edge to seat fixture in ceiling. Fixture will work in up to 1" thick ceiling\*. Quick change LED module with interchangeable optics for job site flexibility and fixture maintenance. Tool-less driver and j-box access. Posi-lock trim retention torsion springs.

#### TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available. Matte White flange is standard.

#### ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

#### CONSTRUCTION

Housing/frame constructed of .060" aluminum to resist corrosion. Self-flanged one piece trim spun from 0.060" thick high purity aluminum and finished to specification.

#### CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE / LUMENS DATA		
PART NUMBR	SOURCE LUMENS²	SYSTEM WATTS
SGRTE9XT10L	1000	11.1
SGRTE9XT13L	1300	15.0
SGRTE9XT20L	2000	23.7
SGRTE9XT30L	3000	34.6
SGRTE9XT40L	4000	39.9
SGRTE9XT50L	5000	54.0

SERIES	LUMENS²	CCT	BEAM	DRIVER / VOLTAGE⁴	OPTIONS⁷	TRIM	FINISH	TRIM OPTIONS			
SGRTE9XT	83 CRI		ND 27°	E Electronic Driver	1 120V	FS Fusing	AR9466XT	SG <sup>8</sup> Semi-Diffuse	SO <sup>10</sup> Micro Prism		
	10L	1000 Lm								27K	2700K
	13L	1300 Lm	30K	3000K	1% ELV/MLV, 120V	CR Corrosion Resistant				MB Matte Black	GL <sup>11</sup> Clear Glass Lens
	20L	2000 Lm	35K	3500K						PT Platinum Silver	FG Frosted Glass Lens
	30L	3000 Lm	40K	4000K	1% Lutron® 2-Wire Forward Phase, 120V	GR Goof Ring				OB Oil Rubbed Bronze	PF <sup>12</sup> Polished Flange
	40L	4000 Lm	98 CRI <sup>3</sup>	DL3E <sup>5</sup> 1% Lutron® EcoSystem®, Fade	AS Anodic Sapphire	AM Anodic Malachite				CH Charcoal	WL Wet Location
	50L	5000 Lm								AC Anodic Champagne	
	10L	1000 Lm	27HK	2700K	1% eldoLED	SN Sun Gold				CO Copper Metallic	
	13L	1300 Lm	30HK	3000K	ED01 <sup>5</sup> 0.1% eldoLED	GH Graphite					
	20L	2000 Lm	35HK	3500K	DALI <sup>5</sup> DALI Control	AMB Anti Microbial Finish					
	30L	3000 Lm	40HK	4000K	DMXS <sup>6</sup> DMX Standard Configuration	CC <sup>9</sup> Custom Color					
					DMXC <sup>6</sup> DMX Non-Standard Custom						

EXAMPLE: SGRTE9XT13L35KMDE1/AR9466XTSG

NOTES:  
 1 Consult Factory for Thicker Ceiling 2 Nominal Source Lumens at Any CCT 3 98CRI Operates at Higher Watts than 83CRI 4 Contact Factory for Additional Options 5 50L Not Available with Lutron Drivers 6 Contact Factory  
 7 See Product Options Page For Details 8 Standard Finish 9 Contact Factory for Special Finishes 10 Standard Lens for MD, WD, XW 11 Standard Lens for ND 12 Flange and Reflector Same Finish



PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.