

5" ROUND DOWNLIGHT

PROJECT:

QUANTITY:

TYPE:

recessed
fixtures



SGD5LV

APPLICATION

5" aperture round Low Voltage downlight.

FEATURES

Efficient reflector design optimized for A, PAR, and R LED lamps (Sold by others). Posi-lock reflector attachment. Integral 5/8" (0.625") plaster ring. Tool-less access for ease of maintenance. Multi-bar adjustable mounting brackets.

TRIM FINISH

Variety of powdercoat and anodized finishes available on trim.

LAMPING


Accepts E21 medium base A lamps and AR111/ PAR36 Halogen lamps.

CONSTRUCTION

Frame constructed of 20 ga. galvanized steel. Reflectors spun from .063" high purity aluminum and finished to specification.

CODE COMPLIANCE

ETL listed for damp locations. Wet location available. Manufactured and tested to UL Standard No. 1598.

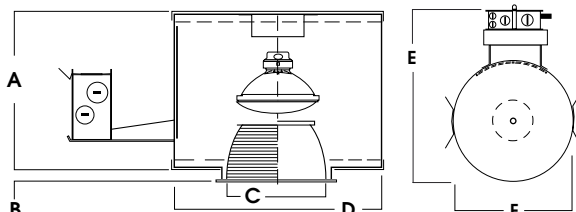

A	B	C	D	E	F
8.5 215.9 mm	0.6 15.8 mm	5.0 127.0 mm	11.5 292.1 mm	16.0 406.4 mm	11.5 292.1 mm

PRODUCT SELECTOR GUIDE

SERIES	DIMMING	OPTIONS	BAR HANGERS	TRIM	FINISH	FLANGE FINISH	LENS
SGD5LV				AR5400			

EXAMPLE

SGD5LV	E1		BH27	AR5400	SG	MF	SO
--------	----	--	------	--------	----	----	----

HOUSING

SERIES	DIMMING	OPTIONS
SGD5LV	E1 Electronic, 120V	CR Corrosion Resistant TR Top Relamping Option

MOUNTING OPTIONS

BAR HANGERS
BH27 27" Solid Bars H12 12" - 24" Expandable Bars CB24 24" C-Channel Bars

TRIM OPTIONS

TRIM	FINISH	FLANGE FINISH	LENS
AR5400 AR5450	SG Semi-Diffuse MW Low Iridescent MB Matte White Matte Black	MF Matching Flange WF White Flange For Use with Non-White Trim Finish	GL Clear Glass Lens SO Micro Prism Solite™ Lens NL No Lens

