
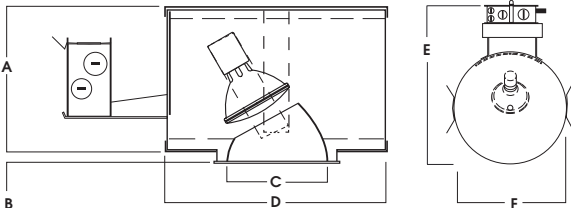


# 5" SHALLOW ADJUSTABLE ACCENT

PAR30-PAR30L SERIES / 75 WATT MAX INC

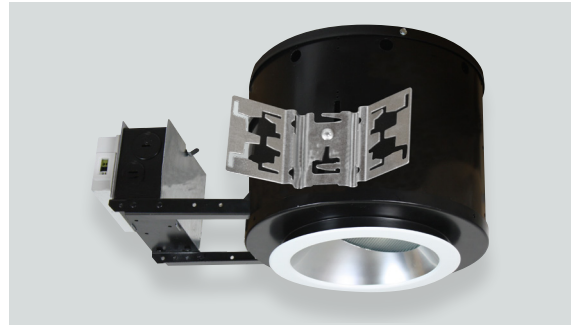

A	B	C	D	E	F
6.5	0.6	5.0	11.5	16.0	11.5
215.9 mm	15.8 mm	127.0 mm	292.1 mm	406.4 mm	292.1 mm

## SGA55IN

### APPLICATION

5" Shallow round PAR30 accent light for incandescent lamps.

### FEATURES

Efficient trim design with a variety of lens options. Trim rotates/locks 360°. Lamp tilts/locks 35°. Integral 5/8" (0.625) plaster ring. Maximum wattage label (MWL) for low wattage Incandescent or LED lamps. Multi-bar adjustable mounting brackets.

### FINISH

Variety of powdercoat and anodized finishes available on reflector. Eco Black (EB) finish available on frame/housing.

### ELECTRONICS

120 Volt is standard. Use option T277 for 277V supply feed.

### CONSTRUCTION

Frame constructed of 20 ga. aluminum. Reflectors spun from .063 high purity aluminum and finished to specification.

### LABELS

UL/ETL Listed for Damp locations. Wet location available. Manufactured and tested to UL Standard No. 1598.

SERIES	OPTIONS	TRIM / FINISH	TRIM OPTIONS	FIXTURE LAMPING*						
<b>SGA55IN-</b> Spectrum Gold 5" Vertical Shallow Adjustable	<b>BH27</b> -27" Bar Hangers (Supplied) <b>CB24</b> -C-Channel Bars <b>CCEA</b> -Chicago Ceiling Plenum <b>CR</b> -Corrosion Resistant <b>T277</b> -Step Down Transformer 277v to 120v <b>FS</b> -Fuse Holder and Fuse <b>PR</b> -Plaster Ring (Special Depth) <b>MWL</b> -Max Wattage Label (Specify Wattage) <b>EB</b> -Eco Black Housing Finish <b>TBC</b> -T-Bar Clips <b>TR</b> -Top Relamping Option	<b>AR5500-SG</b> -Semi-Diffuse Low-Iridescent (Standard) <b>CL</b> -Clear Bright Alzak <b>GO</b> -Gold Alzak <b>HZ</b> -Matte Low Iridescent <b>PW</b> -Pewter Alzak <b>UM</b> -Umber Alzak <b>WE</b> -Wheat Alzak <b>BK</b> -Black Finish <b>WH</b> -White Finish <b>PF</b> -Polished Flange <b>BB</b> -Black Micro Baffle <b>WB</b> -White Micro Baffle  Note: White Flange is Standard.	<b>GL</b> -Clear Glass Lens <b>GS</b> -Gasket <b>SO</b> -Micro Prism Solite™ Lens <b>PG</b> -Prismatic (T73) Lens <b>LN</b> -See Recessed Fixtures/ Lens Options for Lens, Louver and Filter Accessories <b>WL</b> -Wet location	<table border="1"> <thead> <tr> <th>LAMP</th> <th>MAX. WATTAGE</th> </tr> </thead> <tbody> <tr> <td>PAR30</td> <td>75w</td> </tr> <tr> <td>PAR30</td> <td>75w</td> </tr> </tbody> </table> <p>*Medium Base</p> <p>*For Available <b>Decorative Architectural Trims</b>, Consult Factory.</p>	LAMP	MAX. WATTAGE	PAR30	75w	PAR30	75w
LAMP	MAX. WATTAGE									
PAR30	75w									
PAR30	75w									

EXAMPLE: SGA55IN/AR5500SGGL



PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.