


5" ROUND LENSED DOWNLIGHT

PROJECT: _____
 QUANTITY: _____ TYPE: _____

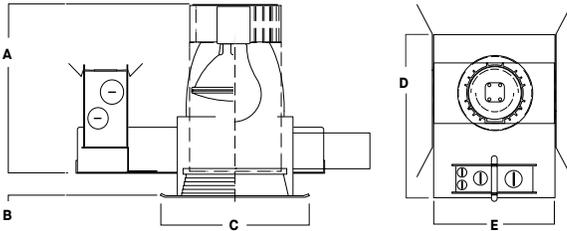

A	B	C	D	E
7.8	0.6	5.0	10.8	8.0
195.0 mm	15.8 mm	127.0 mm	273.0 mm	203.2 mm

Fixture Weight: 4.0 lbs

Ceiling Cutout: Ø 5.3

SG5IN

APPLICATION

5" aperture lens downlight series for A and PAR LED lamps.

FEATURES

Efficient reflector design optimized for A, PAR, and R LED lamps (Sold by others). Posi-lock reflector attachment. Integral 5/8" (0.625") plaster ring. Tool-less access for ease of maintenance. Multi-bar adjustable mounting brackets.

TRIM FINISH

Variety of powdercoat and anodized finishes available on trim.

LAMPING

Accepts E21 medium base A lamps and PAR20/30 lamps.

CONSTRUCTION

Frame constructed of 20 ga. galvanized steel. Reflectors spun from .063" high purity aluminum and finished to specification.

CODE COMPLIANCE

ETL listed for damp locations. Wet location available. Manufactured and tested to UL Standard No. 1598.

PRODUCT SELECTOR GUIDE

SERIES	BAR HANGERS	TRIM	FINISH	FLANGE FINISH	LENS
SG5IN	/	AR5225			

EXAMPLE

SG5IN	/	BH27	/	AR5225	SG	MF	SO
--------------	---	-------------	---	---------------	----	----	----

HOUSING MOUNTING OPTIONS TRIM OPTIONS

SERIES	BAR HANGERS	TRIM	FINISH	FLANGE FINISH	LENS
SG5IN	BH27 27" Solid Bars H12 12" - 24" Expandable Bars	AR5225	SG Semi-Diffuse	MF Matching Flange WF White Flange For Use with Non-White Trim Finish	GL Clear Glass Lens SO Micro Prism Solite™ Lens NL No Lens WL Wet Location
			MW Low Iridescent Matte White		
			MB Matte Black		

