





6" ROUND RETROFIT PULL-DOWN XT SERIES / 3000 LUMENS MAX

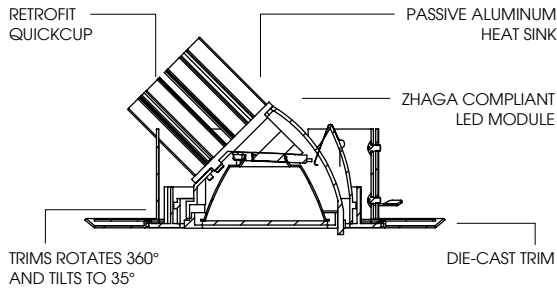

A	B	C
3.37 6.5 mm	9.5 241.3 mm	6.3 160.0 mm

Ceiling Cutout: Ø 6"

SGRTP6XT - TRIM FLANGE / NON-IC RATED

APPLICATION

Retrofit Pull Down adjustable accent light for retail and spotlight applications. Converts 6" aperture fixtures in to high performance LED accent luminaires.

FEATURES

Remodel adjustable accent housing designed for install in finished "hard" ceiling or into existing precut hole. Fixture pulls down to 35° and rotates 360° for optimal aiming. Quick change LED module with interchangeable optics for job site flexibility and fixture upgrade. Two available optics (48° and 60°). Single optical system for smooth light distribution and focus control. Posi-lock trim retention springs and integral collar for deep ceiling, wood, stone or metal ceiling installation¹.

FINISH

Variety of architectural powdercoat and anodized finishes available.

ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Die-cast three piece trim. Spun high performance internal aluminum reflector.

CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE / LUMENS DATA		
PART NUMBER	SOURCE LUMENS ²	SYSTEM WATTS
SGRTP6XT10L	1000	11.1
SGRTP6XT13L	1300	15.0
SGRTP6XT20L	2000	23.7
SGRTP6XT30L	3000	34.6

SERIES	LUMENS ²	CCT	BEAM	DRIVER / VOLTAGE ⁴	OPTIONS ⁵	FINISH	TRIM OPTIONS
SGRTP6XT	83 CRI		MD 48° WD 60°	E Electronic Driver DS10 10% 0-10V DO10 1% 0-10V DS2W1 1% ELV/MLV, 120V DLTE1 1% Lutron® 2-Wire Forward Phase, 120V DL3E 1% Lutron® EcoSystem®, Fade EL10 1%, eldoLED ED01 0.1%, eldoLED DALI DALI Control DMXS⁵ DMX Standard Configuration DMXC⁵ DMX Non-Standard Custom	1 120V 2 277V FS Fusing EM Emergency Battery Pack	MW Matte White MB Matte Black PT Platinum Silver CC⁶ Custom Color	GL⁹ Clear Glass Lens GS Gasket
	10L 1000 Lm	27K 2700K					
	13L 1300 Lm	30K 3000K					
	20L 2000 Lm	35K 3500K					
	30L 3000 Lm	40K 4000K					
	98 CRI						
	10L 1000 Lm	27HK 2700K					
	13L 1300 Lm	30HK 3000K					
	20L 2000 Lm	35HK 3500K					
	30L 3000 Lm	40HK 4000K					

EXAMPLE: SGRTP6XT30L35KMDE2/MWGL

NOTES:
 1 Consult Factory for Thicker Ceiling 2 Nominal Source Lumens at Any CCT 3 Contact Factory for Additional Options 4 See Product Options Page for Details 5 Contact Factory 6 See Product Options Page For Details
 7 Standard Finish 8 Contact Factory for Special Finishes 9 Standard Lens



PROJECT: _____
 TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.