



GLASS REFLECTOR PENDANT
DAMP LOCATION
 XT SERIES

PROJECT: _____
 QUANTITY: _____ TYPE: _____



GPEXT1014XT
 OR - Orange



GPEXT1014XT
 TQ - Turquoise



GPEXT1014XT
 PG - Pub Green



GPEXT1014XT
 PL - Purple

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²	MOUNTING ³	FINISH ⁵		
GPEXT1014XT GPEXT1214XT	83 CRI		EX Electronic Driver, 120V/277V DO10X 1% 0-10V, 120V/277V DS2W1 ELV/MLV, 120V DLTE1 Lutron® 2-Wire Forward Phase (MLV), 120V DL3EX 1%, Lutron® EcoSystem®, 120V/277V	HM⁴ Hang Straight AT⁴ Hang Straight All Thread PM⁴ Rigid Pendant Mount CD⁴ Cord / Cable Mount CM⁴ Cord Mount EMRM 7W Remote EM EMEN 7W Remote with Enclosure	MW⁵ Matte White MB⁵ Matte Black PT⁵ Platinum Silver CC Custom Color See Page 4 for Full Range of Color Options (83-90081)		
	10L	1000 Lm				27K	2700K
	13L	1300 Lm				30K	3000K
	20L	2000 Lm				35K	3500K
	30L	3000 Lm				40K	4000K
	40L	4000 Lm					
	98 CRI						
	10L	1000 Lm				27HK	2700K
	13L	1300 Lm				30HK	3000K
	20L	2000 Lm				35HK	3500K
30L	3000 Lm	40HK	4000K				

EXAMPLE: GPEXT1014XT10L30KEX/CD36MW

NOTES:
 1 Nominal Source Lumens at Any CCT 2 Contact Factory for Additional Options 3 See Mounting Page for Details on Components and Finishes 4 Specify Length in Inches: See Mounting Page for Available Lengths 5 See Color Page for More Options/Consult Factory for Special Finishes 6 Standard Finishes






GLASS REFLECTOR PENDANT DAMP LOCATION XT SERIES

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
GPEXT1014XT10L	1000	881	9.1	96.8
GPEXT1014XT13L	1300	1187	13.0	91.3
GPEXT1014XT20L	2000	1826	21.7	84.1
GPEXT1014XT30L	3000	2740	32.6	84.0
GPEXT1014XT40L	4000	3517	37.9	92.8

¹ Nominal Source Lumens at Any CCT ² Nominal Delivered Lumens at Any CCT

HOUSING DIMENSIONS



Dimensioned with **GPEXT1014XT**

SERIES	A	B
GPEXT1014XT	11.2	20.0
GPEXT1214XT	13.3	22.4

APPLICATION

The Glass Reflector Pendant's distinctive styling will enhance any space with efficient lighting and a bold design.

FEATURES

Speculume series fixtures offer simple contemporary style with functional luminaire performance. All fixtures are designed and manufactured in our factory. Reflector pendant is available in two sizes with direct lighting. Separate finishes may be chosen for fixture and mounting. Interchangeable LED module for ease of maintenance and upgradable. A variety of mounting and finish options available.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 1 x 2-step MacAdam Ellipse binning. High CRI is 98 with 1 x 2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Glass is molded blown white cased inside and soft etched outside for even glare free illumination. Passive extruded aluminum heatsink for optimal thermal management. OSD diffusion optic lens standard

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

SERIES SIZES

GPEXT1014XT



GPEXT1214XT



CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM

HANG STRAIGHT / ALL THREAD / PENDANT



GPEXT1014XT SHOWN WITH PM

CD

CORD / CABLE MOUNT



GPEXT1014XT SHOWN WITH CD

CM

CORD MOUNT



GPEXT1014XT SHOWN WITH CM

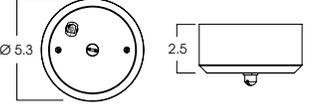
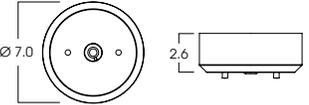





MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF SPECLUME SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



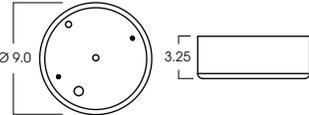
CEILING MOUNTING

<p>RDC5 - SMALL DRIVER CANOPY (STANDARD) MOUNTS TO 4" OCTO J-BOX</p>  <p>CP13 - LARGE DRIVER CANOPY</p> 	<p>HM* HANG STRAIGHT 45° SWIVEL 1/2" STEM - 3/8" NPT</p>  <p>ORDER: HM (Length) SPECIFY LENGTH: HM3 - 3" HM24 - 24" HM6 - 6" HM36 - 36" HM12 - 12" HM48 - 48" HM18 - 18" HM72 - 72" HMLC(XX) Custom Length (Specify in Inches)</p>	<p>AT** HANG STRAIGHT ALL-THREAD 45° SWIVEL 1/2" STEM - 1/4" IP</p>  <p>ORDER: AT (Length) SPECIFY LENGTH: AT12 - 12" AT24 - 24" AT36 - 36" <small>FIELD CUT: THREADED PIPE TO LENGTH NEEDED. CUT PIPE COVER 3/4" SHORTER THAN THREADED PIPE. SUPPLY PIPE COVER OVER THREADED PIPE.</small></p>	<p>PM* RIGID PENDANT MOUNT RIGID 1/2" STEM - 3/8" NPT</p>  <p>ORDER: PM (Length) SPECIFY LENGTH: PM3 - 3" PM24 - 24" PM6 - 6" PM36 - 36" PM12 - 12" PM48 - 48" PM18 - 18" PM72 - 72" PMLC(XX) Custom Length (Specify in Inches)</p>	<p>CD CORD / CABLE MOUNT SJ CORD WITH 1/16 SS CABLE</p>  <p>ORDER: CD (Length) SPECIFY LENGTH: CD36 - 36" CD72 - 72" CD144 - 144" CDLC(XX) Custom Length (Specify in Inches)</p>	<p>CM CORD MOUNT SJ CORD WITH STRAIN RELIEF</p>  <p>ORDER: CM (Length) SPECIFY LENGTH: CM36 - 36" CM72 - 72" CM144 - 144" CMLC(XX) Custom Length (Specify in Inches)</p>
--	--	--	--	--	--



*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS. **ORDER IN 12" INCREMENTS. ODD SIZES MAY BE FIELD CUT

EMERGENCY BATTERY OPTIONS

EMCR - LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY (FOR ROUND CEILING MOUNT TYPES)



REMOTE EMERGENCY BATTERY OPTIONS

<p>EMRM* - 7W REMOTE EMERGENCY BATTERY (50' MAX)</p>  <table border="1" data-bbox="576 1029 771 1071"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>1.3</td> <td>12.6</td> <td>13.0</td> </tr> </tbody> </table>	A	B	C	1.3	12.6	13.0	<p>EMEN* - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)</p>  <table border="1" data-bbox="941 1029 1136 1071"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>2.0</td> <td>17.0</td> <td>6.2</td> </tr> </tbody> </table>	A	B	C	2.0	17.0	6.2
A	B	C											
1.3	12.6	13.0											
A	B	C											
2.0	17.0	6.2											

*OTHER EM BATTERY SIZES AVAILABLE. CONSULT FACTORY



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES

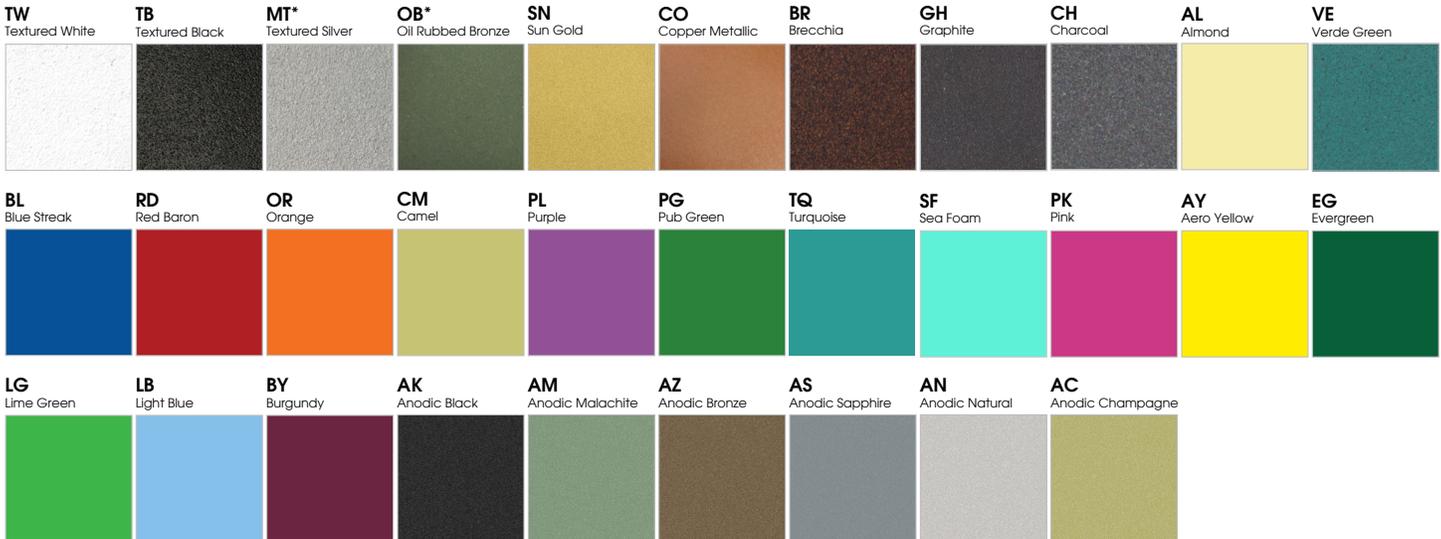
TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⌚
Tier 2 - Typical Finishes	\$\$	⌚⌚
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES



TIER 2 - TYPICAL FINISHES



CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

