




COMPONENTS OF BLT TRACK INSTALLATION

- Architectural Grade 48V Track System.
- Low Profile, easy installation.
- Integral Suspension Rail.
- Copper connector / polycarbonate components.
- UL Listed.

TRACK LENGHT	
DESCRIPTION	1 CIRCUIT
2 METERS	BLT2M
3 METERS	BLT3M

TYPICAL TRACK INSTALLATIONS

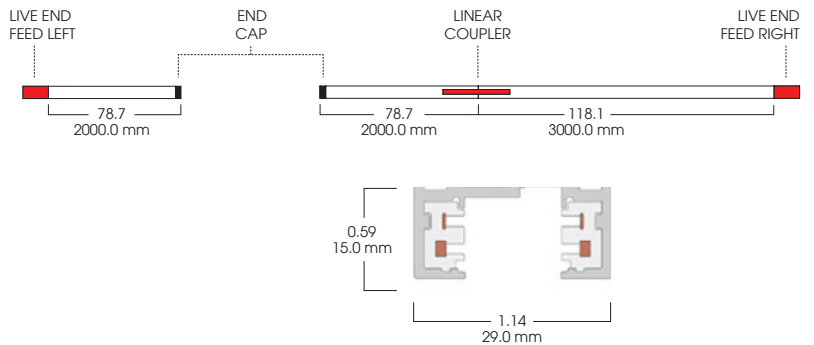

SPECIFY FINISH: White (-1) ; Black (-2): Silver Anodized (-3)

ACCESSORIES FOR BLT TRACK INSTALLATION AND MOUNTING

LIVE END

- 1 CIRCUIT RIGHT **BLT11-R**
- 1 CIRCUIT LEFT **BLT11-L**



END CAP

- 1 CIRCUIT **BLT41**



LINEAR COUPLER

- 1 CIRCUIT **BLT21**



SPECIFY FINISH: White (-1) Black (-2) Grey (-3)

BLT POWER PACKS

NUMBER OF FIXTURES PER RUN IS CONTINGENT ON THE WATTAGE OF THE DRIVER AND NOT THE LENGTH OF TRACK. MAX RUN 100' PER CHANNEL.

			7L 700 LUMEN	13L 1300 LUMEN
PS100	100W		9	5
PS200D	200W		9	5
			9	5

D: Dual Channel