



SHOWN WITH OPTIONAL WIREGUARD



SERIES	A	B	C	D	E
GL04IND48LX	5.1	4.6	3.8	3.8	48.3
GL04IND96LX	5.1	4.6	3.8	3.8	96.3

## PENDANT / SURFACE SEMI-DIRECT MILLTOWN SERIES

specline  
linear



### GL04IND48LX, GL04IND96LX

#### APPLICATION

Milltown is a 4" wide linear pendant or surface mount for semi-direct illumination.

#### FEATURES

Small rectilinear profile for pendant or surface mount applications. Optional wire guard enhances rugged design and aesthetic. LED module and driver are accessible from below for future replacement.

#### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for available finishes. Platinum Silver is standard.

#### ELECTRONICS

LED module features high brightness white Nichia LEDs. 3-step MacAdam Ellipse binning with CRI 82 typical. Variety of electronic 120V/277V and dimming drivers available.

#### CONSTRUCTION

20ga steel formed housing. High efficiency snap in acrylic lens. 3/16" flush machined aluminum end caps included. Optional wire guard fabricated from formed 4mm solid steel rod.

#### OPTICS

Extruded acrylic diffuser features smooth sides providing 90% direct, 10% indirect illumination.

#### CODE COMPLIANCE

BAA Compliant. ETL Certified to meet US and Canadian Standards, suitable for dry or damp locations. Manufactured and tested to UL standards 1598/8750.

#### WATTAGE / LUMENS DATA

PART NUMBER	SOURCE LUMENS <sup>1</sup>	DELIVERED LUMENS <sup>2</sup>	SYSTEM WATTS	LPW
GL04IND48LX05L	2000	1885	16.0	118
GL04IND48LX07L	2300	2390	21.0	114
GL04IND48LX12L	4800	4373	36.0	121
GL04IND48LX15L	6000	5325	45.0	118
GL04IND48LX20L	8000	6822	60.1	114

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / VOLTAGE	LENS	MOUNTING <sup>3</sup>	OPTIONS	FINISH
GL04IND48LX GL04IND96LX	05L	500 Lm/Ft	30K 3000K	EX Electronic Driver, 120V/277V DS10X 10%, 0-10V DO10X 1%, 0-10V DS2W1 1%, ELV/MLV, 120V	DW Diffuse White	PM <sup>4</sup> Rigid Pendant Mount HM <sup>4</sup> Hang Straight CHN <sup>4</sup> Chain and Cord CD <sup>4</sup> Cord and Cable Mount SM <sup>5</sup> Surface Mount	PT <sup>6</sup> Platinum Silver MB Matte Black MW Matte White TW Textured White TB Textured Black MT Textured Silver BZ Bronze OB Oil Rubbed Bronze CH Charcoal GH Graphite AC Champagne SN Sun Gold BR Brecchia Rust AN Anodic Natural CO Copper Metallic CC <sup>7</sup> Custom Color
	07L	700 Lm/Ft	35K 3500K				
	12L	1200 Lm/Ft	40K 4000K				
	15L	1500 Lm/Ft					
	20L	2000 Lm/Ft					
						FS Fuse WG Wire Guard	

**EXAMPLE:** GL04IND48LX15L35KDS10XDWPM24WGPT

#### NOTES:

1 Total Nominal Source Lumens 2 Nominal Delivered Lumens at 30K 3 See Mounting Pages for Options and Details on Components and Finishes  
4 Specify Length in Inches; See Mounting Page for Availab 5 May Be Ceiling or Wall Mount 6 Standard Finishes 7 Contact Factory for Special Finishes

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



PROJECT:	TYPE:
CAT. NO.:	




# PENDANT / SURFACE SEMI-DIRECT MILLTOWN SERIES / FIXTURE OPTIONS

specline  
linear



### SERIES SIZES

GL04IND48LX

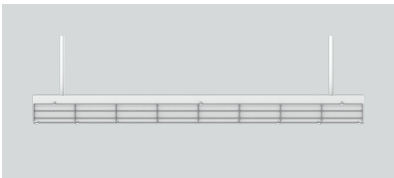

A	B
48.3	4.0
1226.8 mm	101.6 mm

GL04IND96LX



A	B
96.3	4.0
2446.0 mm	101.6 mm

### MOUNTING TYPES

**HM / PM**  
HANG STRAIGHT / RIDGID PENDANT



**CHN**  
CHAIN AND CORD



**CD**  
CORD / CABLE MOUNT



**SM**  
SURFACE MOUNT



### STANDARD FINISHES


**MW**  
MATTE WHITE



**MB**  
MATTE BLACK



**PT**  
PLATINUM SILVER




# PENDANT / SURFACE SEMI-DIRECT MILLTOWN SERIES / PHOTOMETRIC DATA

specline  
linear



GL04IND48LX-20L35K-DWEX-xxMW

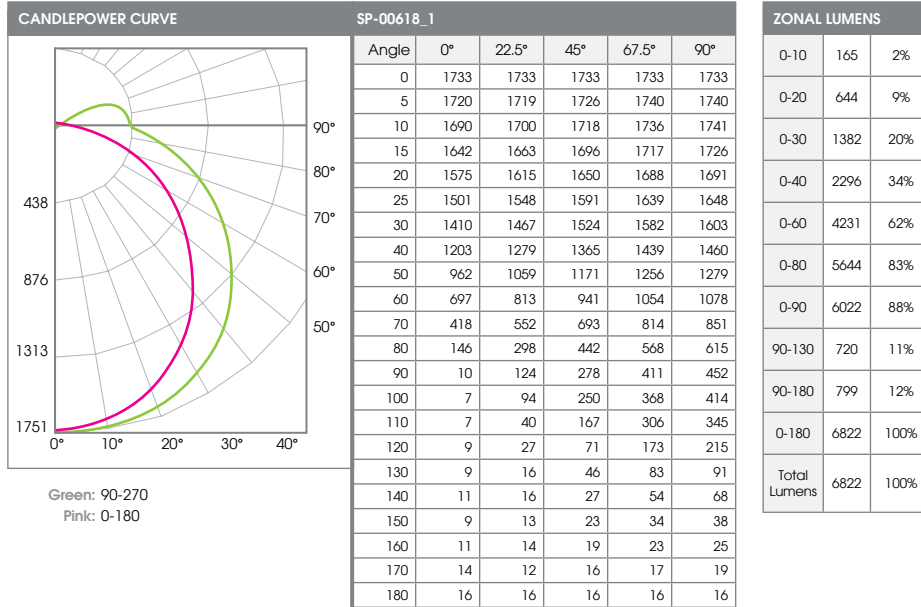

Delivered Lumens: 6822 CP @ 0° (Nadir): 1733  
Luminaire Watts: 60.1 Beam Angle: 112°  
LER: 114 CRI: 80

Spacing Ratio: 1.22  
Output Multipliers: 05L x 0.28, 07L x 0.35, 12L x 0.64, 15L x 0.78, 20L x 1.0  
CCT Multipliers: 30K x .979, 35K x 1.0, 40K x 1.03