



1' X 4' FLAT PANEL
DAMP LOCATION
 PANELUME SERIES / 5200 LUMENS

PROJECT: _____
 TYPE: _____



SERIES	LUMENS ¹	CCT	DRIVER / VOLTAGE
PL1248	52L 5200 Lm	30K 3000K 40K 4000K 50K 5000K	DX 1%, 0-10V, 120V/277V

EXAMPLE: PL124852L40KDX

NOTES:
 1 Nominal Delivered Lumens at 40K



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.






1' X 4' FLAT PANEL
DAMP LOCATION
 PANELUME SERIES / 5200 LUMENS

LUMENS / WATTAGE DATA			
PART NUMBER	DELIVERED LUMENS ¹	SYSTEM WATTS	LPW
PL124852L40KDX	5200	40	130

¹ Nominal Source Lumens at 40K

HOUSING DIMENSIONS

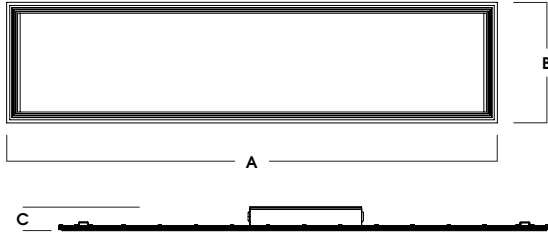

A	B	C
47.75	11.8	2.125
1213.0 mm	300.0 mm	54.0 mm

Weight: 7 Lbs

APPLICATION

1' x 4' rectangular recessed flat panel for general illumination.

FEATURES

Designed for recessed grid ceiling installation. Edge lid acrylic produces uniform lens illumination. Shallow construction is ideal for spaces with restricting plenum heights.

FINISH

Platinum Silver powdercoat is standard.

ELECTRONICS

LED system features high brightness white LED's. CRI is 80 with 3-step MacAdam Ellipse binning. 0-10V 10% 120V/277V dimming driver standard.

CONSTRUCTION

Housing constructed of extruded anodized aluminum. Etched acrylic lens is optimized for edge lighting.

CODE COMPLIANCE

Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

