


12" ROUND DIRECT QUICK SHIP GENERAL ILLUMINATION



A	B	C
3.6	8.1	11.7
91.4 mm	205.7 mm	297.2 mm

C1203GV - CEILING MOUNT

QUICK SHIP

Quick Ship Surface highlights products that can ship in 5 - 10 working days. See standard specification sheet for full range of options.

APPLICATION

12" Round x 3.75" High "Shallow" LED cylinder with wide distribution. This fixture fits in a variety of areas where a recessed fixture is not an option.

FEATURES

Spectrum's Cylinder series provides traditional architectural style with high performance and energy efficient illumination. Rugged design with flexible mounting, finish and LED options make these extremely versatile fixtures. Single stage optical system design delivers smooth general illumination.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. All exposed materials are chromate pretreated to resist corrosion.

ELECTRONICS

GV LED system features high brightness white Samsung LEDs. Electronic 120V/277V, dimming drivers. Standard CRI is 84.

CONSTRUCTION

Spun seamless aluminum fixture housing. Stainless steel hardware with galvanized steel brackets to resist corrosion. One piece reflector trim spun from .063 thick high purity aluminum and finished to specification.

CODE COMPLIANCE

BAA Compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standard No. 1598/8750.

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS	SYSTEM WATTS	LPW
C1203GV15L	1500	1165	10	117
C1203GV27L	2700	2033	18	113
C1203GV37L	3700	2982	26	115

SERIES	LUMENS ¹		CCT		DRIVER / DIMMING		TRIM	MOUNTING		FINISH		
C1203GV	15L	1500 Lm	35K	3500K	DS10X	10%, 0-10V, 120V/277V	TSG	Semi Diffuse Low Iridescent Clear	SM	Surface Mount	MW	Matte White
	27L	2700 Lm	40K	4000K							MB	Matte Black
	37L	3700 Lm									LENS	SO ²

EXAMPLE: C1203GV27L35KDS10X/TSGSOSMMW

NOTES:
1 Nominal Source Lumens at Any CCT 2 Standard Lens



PROJECT: _____
TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

12" ROUND DIRECT
QUICK SHIP
GENERAL ILLUMINATION



STANDARD FINISHES

MW
MATTE WHITE



MB
MATTE BLACK




12" ROUND DIRECT

GENERAL ILLUMINATION / PHOTOMETRIC DATA



C1203GV-37L35K-EX-TSG-SO

37L - 84 CRI

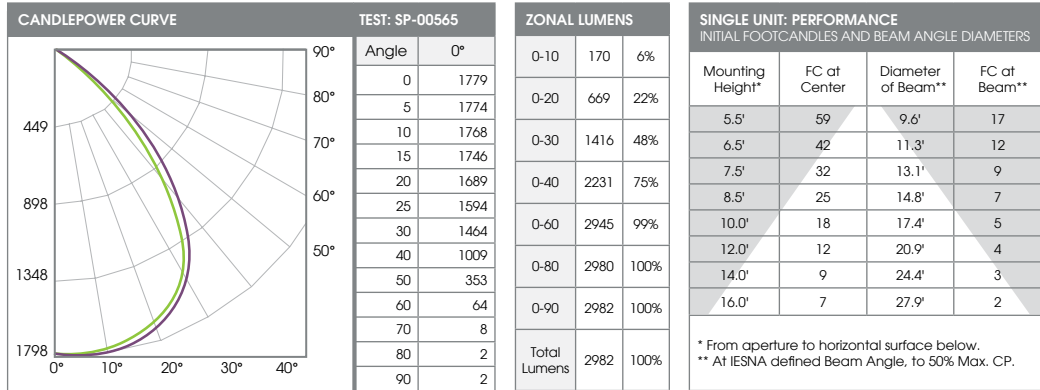

Green: 0-180
Purple: 67.5-247.5

Delivered Lumens: 2982 CP @ 0° (Nadir): 1779
Luminaire Watts: 26 Beam Angle: 82.1°
LER: 115 CRI: 84

Spacing Ratio: 1.22
Output Multipliers: 15L x 0.39, 27L x 0.68

* From aperture to horizontal surface below.
** At IESNA defined Beam Angle, to 50% Max. CP.