



## 22" PRISMATIC DDH HI-BAY QUICK SHIP

DDH SERIES



### PRDDH22GV - CEILING MOUNT

#### QUICK SHIP

Quick Ship Surface highlights products that can ship in 5 - 10 working days. See standard specification sheet for full range of options.

#### APPLICATION

22" Lumen Max GV series performance pendant for low, mid-bay and high-bay applications. Prismatic refractor provides horizontal and vertical distribution.

#### FEATURES

Domed Fixture Housing (DDH) features a contemporary design that is easy to maintain. Single-stage optical system for smooth light distribution. 85 CRI minimum. Consult factory for high CRI or special applications. LED module and driver designed for ease of maintenance and replacement. Posi-lock refractor retention ring will absorb shocks and impact. Optional safety cable. Variety of optical lenses and mounting methods.

#### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

#### ELECTRONICS


GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 85+. Higher CRI, R9 and custom LED configurations are available, consult factory.

#### CONSTRUCTION

Spun aluminum housing with die-cast aluminum heat sink and mounting hub. Refractor made of cast UV stabilized acrylic.

#### CODE COMPLIANCE

BAA Compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

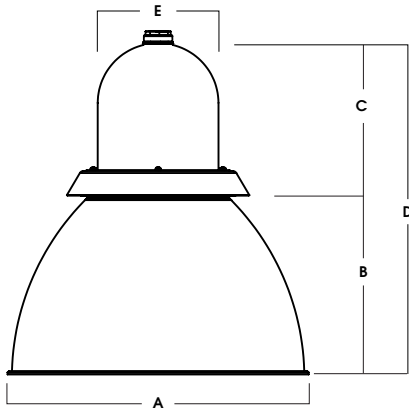

A	B	C	D	E
22.4 569.0 mm	13.4 340.4 mm	12.2 309.9 mm	25.7 652.8 mm	7.5 190.5 mm

Fixture Weight: 18.0 lbs

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS <sup>1</sup>	DELIVERED LUMENS <sup>2</sup>	SYSTEM WATTS	LPW
PRDDH22GV180L	18000	14102	116	121.57

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING	MOUNTING	REFRACTOR	DIFFUSER OPTIONS	FINISH
PRDDH22GV	180L 18000 Lm	35K 3500K 40K 4000K	DS10X 10%, 0-10V, 120V/277V	CD72 72" Cord / Cable Mount	DF22 22" Diffuse	BC22/CNFR 22" Band Clamp with Conical Frosted Lens	MW PT Matte White Platinum Silver

**EXAMPLE:** PRDDH22GV180L35KDS10X/CD72DF22BC22/CNFRPT

NOTES:  
1 Nominal Source Lumens at 35K 2 Nominal Delivered Lumens at 35K with PR22. No Lens



PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.