

RAFO4OC - TRIM FLANGE / NON IC RATED

APPLICATIONS

4" Round LED adjustable accent light with finished trim flange for Non-IC installations.

FEATURES

LED module tilts 35°, rotates 360°. Delivers a range of 1100-2600 lumens. Two-stage interchangeable optical and lens systems for smooth light distribution. Zhaga LED module for ease of maintenance and replacement. Shallow plenum design. Tool-less LED module, driver, and J-Box access. Multi-Bar mounting brackets. BH27 Standard aluminum mounting bars included. Posi-lock trim retention torsion springs. Integral 0.625" collar, with plaster option (PR) for up to 3" thick ceiling.

TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available.

Matte White flange is standard.

ELECTRONICS

LED module features high brightness white Osram LEDs. 3-step MacAdam Ellipse binning and CRI 84 minimum, 90 CRI available. Variety of electronic 120V/277V and dimming drivers.


CONSTRUCTION

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Self-Flanged one piece trim spun from 0.063" thick high purity aluminum and finished to specification.

CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL listed for damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE			
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS ¹	SYSTEM WATTS
RAFO4OC10L	RAFO4LEDOC12W	1100	15.2
RAFO4OC20L	RAFO4LEDOC19W	2100	23.5
RAFO4OC30L	RAFO4LEDOC27W	3000	31.0

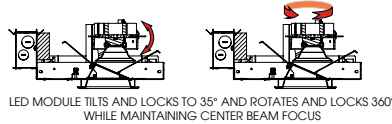

SERIES	LUMENS ¹	CCT	OPTICS	DRIVER / VOLTAGE ²	OPTIONS ³	TRIM	FINISH	TRIM OPTIONS ⁹			
RAFO4OC	84 CRI		ND 20°	E Electronic Driver DS2W1 1%, ELV/MLV, 120V DS10 10%, 0-10V DO10 1%, 0-10V EL10 1%, eldoLED ED01 0.1%, eldoLED DLTE1 1% Lutron® 2-Wire Forward Phase, 120V DL3E 1% Lutron® EcoSystem®, Fade	1 120V 2 277V	BH27 ⁴ 27" Solid Bars H12 12" - 24" Expandable Bars H06 6" - 12" Expandable Bars CB24 24" C-Channel Bars EM 7W Emergency Battery Test Switch Remote FS Fusing EB Black Housing CR Corrosion Resistant PR ⁵ Deep Ceiling Extension GR Goof Ring	RA4FOC ⁶ SG ⁷ Semi-Diffuse HZ Haze Full Diffuse MW Matte White MB Matte Black PT Platinum Silver OB Oil Rubbed Bronze CH Charcoal AC Anodic Champagne AS Anodic Sapphire AM Anodic Malachite SN Sun Gold CO Copper Metallic GH Graphite CC ⁸ Custom Color	SOX ¹⁰ Micro Prism Solite™ Lens GLX ¹¹ Clear Glass Lens PGX Prismatic Glass Lens FGX Frosted Glass Lens SOW Micro Prism Solite™ Lens Wet Location GLW Clear Glass Lens Wet Location PGW Prismatic Glass Lens Wet Location FGW Frosted Glass Lens Wet Location PF ¹² Polished Flange AMB Anti Microbial Finish			
	10L	1100 Lm	27K						2700K	MD	30°
	20L	2100 Lm	30K						3000K	WD	40°
	30L	3100 Lm	35K						3500K	XW	50°
			40K						4000K		
	90 CRI										
	10L	1000 Lm	27HK						2700K		
			30HK						3000K		
	20L	2000 Lm	30HK						3000K		

EXAMPLE: RAFO4OC10L35KNDE1H12/RA4FOCSGGLX

NOTES:
 1 Nominal Source Lumens at 30K 2 Contact Factory for Additional Options 3 See Product Options Page for Details 4 Standard Bar Hangers 5 Contact Factory 6 "F" Indicates Self-Flange Trim, Matte White Standard
 7 Standard Finish 8 Contact Factory for Special Finishes 9 Contact Factory for Special Lenses / Louvers 10 Standard Lens for MD, WD, XW 11 Standard Lens for ND 12 Flange and Reflector Same Finish



PROJECT: _____
 TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.