

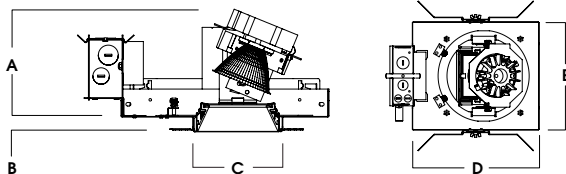


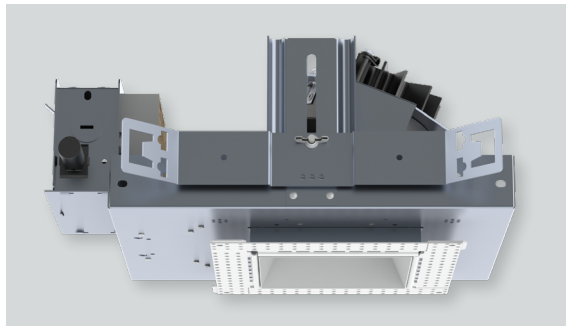

# 4" SQ. TRIMLESS ADJUSTABLE ACCENT

XT SERIES / 4000 LUMENS MAX

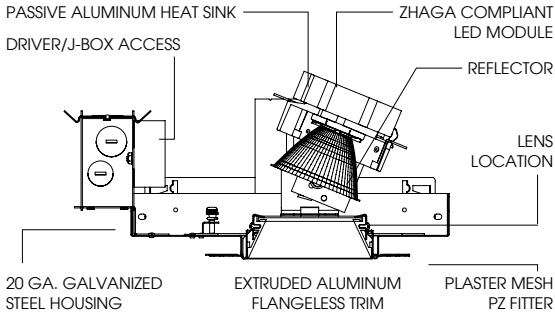

A	B	C	D	E
10L-20L: 5.8	.625	4.0	11.1	9.5
30L-40L: 6.8	15.2 mm	101.6 mm	281.9 mm	241.3 mm

## SAZO4XT - TRIMLESS / NON-IC RATED

### APPLICATION

Versatile 4" Square aperture recessed LED accent light with flangeless trim and a wide range of lumens and optical controls.

### FEATURES

LED module tilts 35°, rotates 360°. Two-stage optical system for smooth light distribution and focus control. Quick change LED module with interchangeable optics for job site adjustment and fixture maintenance. Shallow plenum design. Tool-less driver and j-box access. Posi-lock trim retention torsion springs. Integral .625" collar with deep ceiling option for up to 2" thick ceiling (PR).

### TRIM FINISH

A variety of architectural powdercoat colors are available. Plaster mesh filter included.

### ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

### CONSTRUCTION

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Flangeless one piece trim extruded high purity aluminum and finished to specification.

### CODE COMPLIANCE

BAA Compliant. Non-IC rated. UL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE					
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS <sup>1</sup>	DELIVERED LUMENS <sup>2</sup>	SYSTEM WATTS	LPW
SAZO4XT10L	SAZO4LEDX115W	1000	832	11.1	75
SAZO4XT13L	SAZO4LEDX120W	1300	1120	15.0	75
SAZO4XT20L	SAZO4LEDX133W	2000	1723	23.7	73
SAZO4XT30L	SAZO4LEDX152W	3000	2585	34.6	75
SAZO4XT40L	N/A	4000	3317	39.9	83

SERIES	LUMENS <sup>1</sup>	CCT	OPTICS	DRIVER / DIMMING / VOLTAGE <sup>4</sup>	OPTIONS <sup>6</sup>	TRIM	FINISH	TRIM OPTIONS <sup>12</sup>	
SAZO4XT	83 CRI		XN <sup>3</sup> 10°	E Electronic Driver	1 120V	BH27 <sup>7</sup> 27" Solid Bars	SA4NXT <sup>9</sup>	MW <sup>10</sup> Matte White	SOX <sup>13</sup> Micro Prism Solite™ Lens
	10L 1000 Lm	27K 2700K							
	13L 1300 Lm	30K 3000K	MD 40°	DS10_ 10% 0-10V	H06 6" - 12" Expandable Bars	PT Platinum Silver	PGX Prismatic Glass Lens	FGX Frosted Glass Lens	
	20L 2000 Lm	35K 3500K	WD 45°	DO10_ 1% 0-10V	H06 6" - 12" Expandable Bars	OB Oil Rubbed Bronze	FGX Frosted Glass Lens		
	30L 3000 Lm	40K 4000K	XW 50°	DS2W1 1% ELV/MLV, 120V	CB24 24" C-Channel Bars	CH Charcoal	SOW Micro Prism Solite™ Lens	GLW Clear Glass Lens	
	40L 4000 Lm			DLTE1 1% Lutron® 2-Wire Forward Phase, 120V	EM Integral Emergency Battery	AC Anodic Champagne	Wet Location		
	98 CRI			DL3E 1% Lutron® EcoSystem®, Fade	FS Fusing	AS Anodic Sapphire	Clear Glass Lens	PGW Prismatic Glass Lens	
	10L 1000 Lm	27HK 2700K		EL10_ 1%, eldoLED	EB Black Housing	AM Anodic Malachite	Wet Location		
	13L 1300 Lm	30HK 3000K		ED01_ 0.1%, eldoLED	CR Corrosion Resistant	SN Sun Gold	Wet Location	FWG Frosted Glass Lens	
	20L 2000 Lm	35HK 3500K		DALI_ DALI Control	PR <sup>8</sup> Deep Ceiling Extension	CO Copper Metallic	Wet Location		
	30L 3000 Lm	40HK 4000K		DMXS_5 DMX Standard Configuration	GR Goof Ring	GH Graphite	Wet Location		
				DMXC_5 DMX Non-Standard Custom	AMB Anti Microbial Finish	AMB Anti Microbial Finish	Wet Location		
				WDFT Fitter for Wood Ceiling	CC <sup>11</sup> Custom Color	Wet Location			

EXAMPLE: SAZO4XT20L35KMDE1H12/SA4NXTMWNSOX

NOTES:  
 1 Nominal Source Lumens at Any CCT 2 Nominal Delivered Lumens 83 CRI at Any CCT with ND-MW, No Lens, Aimed at 0° 3 XN 20L Max at 83 and 98 CRI 4 Contact Factory for Additional Options 5 Contact Factory  
 6 See Product Options Page for Details 7 Standard Bar Hangers 8 Contact Factory 9 "N" Indicates Flangeless Trim 10 Standard Finish 11 Contact Factory for Special Finishes 12 Contact Factory for Special Lenses/Louvers  
 13 Standard Lens for MD, WD, XW 14 Standard Lens for XN and ND



PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.