



# 4" SQUARE TRIMLESS IC WALL WASH

XT SERIES / 2000 LUMENS MAX



## SWZI4XT - TRIMLESS / IC RATED

### APPLICATION

Versatile 4" Square aperture recessed LED wall wash for Insulated Ceiling installations with flangeless trim and a wide range of lumens and control options.

### FEATURES

Two-stage optical system for smooth light distribution and focus control. Quick change LED module with interchangeable optics for job site adjustment and fixture maintenance. Shallow plenum design. Tool-less driver and j-box access. Posi-lock trim retention torsion springs. Integral .625" collar with deep ceiling option for up to 2" thick ceiling (PR).

### TRIM FINISH

A variety of architectural powdercoat colors are available. Plaster mesh filter included.

### ELECTRONICS




LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

### CONSTRUCTION

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Flangeless one piece trim extruded high purity aluminum and finished to specification.

### CODE COMPLIANCE

BAA Compliant. IC rated. UL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

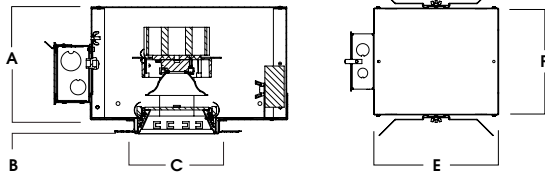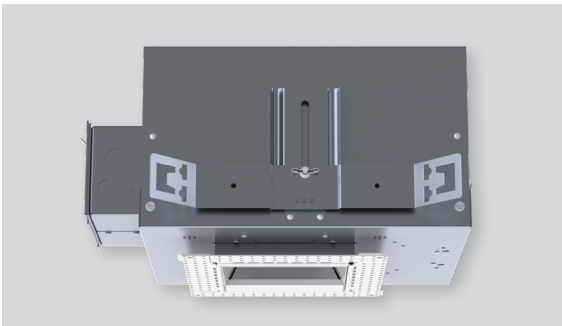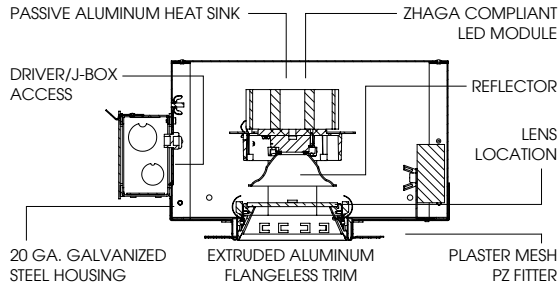

A	B	C	D	E
6.4 162.6 mm	.625 15.2 mm	4.0 101.6 mm	10L-13L: 13.2 20L: 19.2	9.5 241.3 mm

WATTAGE TO LUMENS UPDATE					
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS <sup>1</sup>	DELIVERED LUMENS <sup>2</sup>	SYSTEM WATTS	LPW
SWZI4XT10L	SWZI4LEDX115W	1000	686	11.1	61.8
SWZI4XT13L	SWZI4LEDX120W	1300	924	15.0	61.6
SWZI4XT20L	SWZI4LEDX133W	2000	1421	23.7	60.0

SERIES	LUMENS <sup>1</sup>	CCT	OPTICS	DRIVER / DIMMING / VOLTAGE <sup>3</sup>	OPTIONS <sup>4</sup>	TRIM	FINISH	TRIM OPTIONS <sup>10</sup>			
SWZI4XT	83 CRI		XW Extra Wide	E. Electronic Driver DS10. 10% 0-10V DO10. 1% 0-10V DS2W1. 1% ELV/MLV, 120V DLTE1. 1% Lutron® 2-Wire Forward Phase, 120V DL3E. 1% Lutron® EcoSystem®, Fade EL10. 1% eldoLED ED01. 0.1% eldoLED DALI. DALI Control	1 120V 2 277V	BH27 <sup>5</sup> . 27" Solid Bars H12. 12" - 24" Expandable Bars H06. 6" - 12" Expandable Bars CB24. 24" C-Channel Bars EMRM. Remote Emergency Battery Pack FS. Fusing EB. Black Housing CR. Corrosion Resistant PR <sup>9</sup> . Deep Ceiling Extension GR. Goof Ring CCEA. Chicago Ceiling Plenum Rated AMB. Anti Microbial Finish WDFI. Filter for Wood Ceiling	SW4NXT <sup>7</sup>	MW <sup>8</sup> . Matte White MB. Matte Black PT. Platinum Silver OB. Oil Rubbed Bronze CH. Charcoal AC. Anodic Champagne AS. Anodic Sapphire AM. Anodic Malachite SN. Sun Gold CO. Copper Metallic GH. Graphite AMB. Anti Microbial Finish CC <sup>9</sup> . Custom Color	SKX <sup>11</sup> . Linear Wall Wash Lens SKW. Linear Wall Wash Lens Wet Location		
	10L	1000 Lm								27K	2700K
	13L	1300 Lm								30K	3000K
	20L	2000 Lm								35K	3500K
										40K	4000K
	98 CRI										
	10L	1000 Lm								27HK	2700K
	13L	1300 Lm								30HK	3000K
	20L	2000 Lm								35HK	3500K
										40HK	4000K

**EXAMPLE:** SWZI4XT10L35KXWE1H12/SW4NXTMWSKX

**NOTES:**  
 1 Nominal Source Lumens at Any CCT 2 Nominal Delivered Lumens 83 CRI at Any CCT with XW-MW-SKX 3 Contact Factory for Additional Options 4 See Product Options Page for Details 5 Standard Bar Hangers 6 Contact Factory  
 7 "N" Indicates Flangeless Trim 8 Standard Finish 9 Contact Factory for Special Finishes 10 Contact Factory for Special Lenses/Louvers 11 Standard Lens



PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.