




SUSPENDED BOWL DECO-TRIM

OS SERIES / 4500 LUMENS MAX

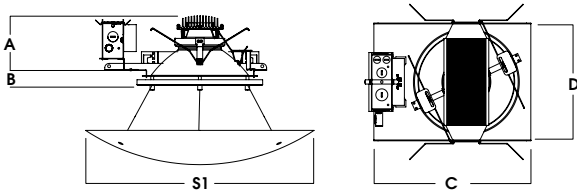

A	B	C	D	TRIM	S1
4.97	6.5	13.3	7.9	SODSB14	14.0
5.25	6.5	14.6	10.5	SODSB20	14.0

SGE6LEDOS - DECORATIVE TRIM / NON-IC RATED

APPLICATION

6" LED Downlight with Suspended Decorative Bowl in 14" and 20" diameters.

FEATURES

Deco Bowl creates ceiling brightness and visual appeal. Stainless steel adjustable cable. Two-stage optical system for smooth light distribution. Zhaga International Standard LED module for ease of maintenance and replacement. Shallow plenum design. Tool-less LED module, driver and J-Box access. Multi-Bar mounting brackets. BH27 Standard mounting bars included. Posi-lock trim retention torsion springs. Integral 0.625" collar.

TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available. Matte white flange is standard.

ELECTRONICS

LED module features high brightness white Osram LEDs. 3-step MacAdam Ellipse binning and CRI 84 minimum. Full range of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Housing/frame constructed of #20 ga. galvanized steel to resist corrosion. Deco Bowl is formed with seamless Matte White or Faux Alabaster acrylic. Passive machined aluminum heatsink.

CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. LM79/LM80/TM21 data available. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE		
PART NUMBER	SOURCE LUMENS ¹	SYSTEM WATTS
SGE6LEDOS10L	1100	11
SGE6LEDOS20L	2000	20
SGE6LEDOS30L	3000	28
SGE6LEDOS45L	4500	41

SERIES	LUMENS ¹	CCT	DRIVER / VOLTAGE ²	OPTIONS ⁴	TRIM	FINISH	TRIM OPTIONS		
SGE6LEDOS	10L	1100 Lm	27K 2700K	E Electronic Driver DS10 10%, 0-10V DO10 1%, 0-10V DS2W1 1%, ELV/MLV, 120V DLTE1 1% Lutron® 2-Wire Forward Phase, 120V DL3E 1% Lutron® EcoSystem®, Fade EL10 1%, eldoLED ED01 0.1%, eldoLED DALI DALI Control DMXS³ DMX Standard Configuration DMXC³ DMX Non-Standard Custom	1 120V 2 277V	BH27⁵ 27" Solid Bars H12 12" - 24" Expandable Bars H06 6" - 12" Expandable Bars CB24 24" C-Channel Bars FS Fusing EB Fixture Painted Black CR Corrosion Resistant PR⁶ Deep Ceiling Extension GR Goof Ring ZIG⁷ ZigBee Module BLU⁷ Bluetooth LE EM⁸ 7W Emergency Battery Test Switch Remote AMB Anti-Microbial Finish	AR6223OSMW SODSB14 14" Diameter AR6223OSMW SODSB20 20" Diameter	WA Matte White Acrylic FA Faux Matte Alabaster	MW⁹ Matte White MB Matte Black PT Platinum Silver BZ Bronze OB Oil Rubbed Bronze CH Charcoal AS Anodic Sapphire AM Anodic Malachite SN Sun Gold CO Copper Metallic GH Graphite CC¹⁰ Custom Color AMB Anti-Microbial Finish
	20L	2000 Lm	30K 3000K						
	30L	3000 Lm	35K 3500K						
	45L	4500 Lm	40K 4000K						

EXAMPLE: SGE6LEDOS20L35KE1/AR6223OSMWSODSB20FAMW

NOTES:
 1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 Contact Factory 4 See Product Options Page for Details 5 Standard Bar Hangers 6 Contact Factory 7 Order DS101/2 When Specifying ZIG or BLU
 8 Standard EM 9 Standard Finish 10 Contact Factory for Special Finishes



PROJECT: _____
 TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.