


4" SQUARE ACCENT DOWNLIGHT ADJUSTABLE MR16 LAMP 65 WATT MAX INCANDESCENT

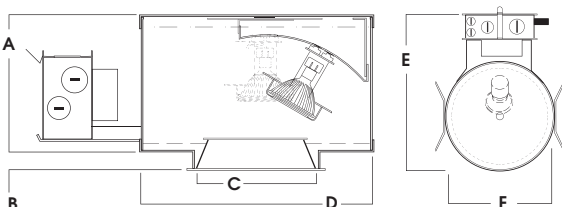

A	B	C	D	E	F
4.6 117.5 mm	0.6 15.8 mm	4.0 101.6 mm	8.0 203.2 mm	13.0 330.2 mm	8.0 203.2 mm

SGAG4SQ

APPLICATION

4" Square aperture MR16 adjustable accent.

FEATURES

- Efficient trim design optimized for Halogen lamps.
- Trim rotates 360° for easy alignment, lamp tilts and locks to 45°.
- Integral 5/8" (0.625) plaster ring.
- Maximum wattage label (MWL) for low wattage Halogen or LED lamps.
- Tool-less transformer access.
- Multi-bar adjustable mounting brackets.

FINISH

Variety of powdercoat and anodized finishes available on trim.
Eco Black (EB) finish available on frame/ housing.

ELECTRONICS

120V Electronic transformer is standard.

CONSTRUCTION

Frame constructed of 20 ga. aluminum.
Trim formed from .050 high purity aluminum and finished to specification.

LABELS

UL/ ETL Listed for Damp Locations. Wet location available.
Manufactured and tested to UL Standard No. 1598.

Max Ceiling Thickness:	1.0 (25.4 mm)
Ceiling Cutout:	5.0 ² (127.0 mm) ²
Fixture Weight:	5.0 lbs

SERIES	TRANSFORMER	OPTIONS	TRIM / FINISH	TRIM OPTIONS	FIXTURE LAMPING				
SGAG4SQ- Spectrum Gold 4" Vertical Adjustable Square	E1 -Electronic, 120V	BH27 -27" Bar Hangers (Supplied)	AR0204-SG -Semi-Diffuse Low-Iridescent (Standard)	GL -Clear Glass Lens	<table border="1"> <thead> <tr> <th>LAMP</th> <th>MAX. WATTAGE</th> </tr> </thead> <tbody> <tr> <td>MR-16</td> <td>65w</td> </tr> </tbody> </table> <p>* For 75w lamp, use Philips or Ushio-America or consult factory</p>	LAMP	MAX. WATTAGE	MR-16	65w
	LAMP	MAX. WATTAGE							
MR-16	65w								
E2 -Electronic, 277V	BH6 -Expandable Bar Hangers, 6" - 12"	BH12 -Expandable Bar Hangers, 12" - 24"	GM -Corrugated Soft Glow	GS -Gasket					
MGN1 -Magnetic Transformer 120V	BH24 -C-Channel Bars	CB24 -C-Channel Bars	GO -Gold Alzak	SO -Micro Prism Solite™ Lens					
MGN2 -Magnetic Transformer 277V	CCEA -Chicago Ceiling Plenum CCEA	CCEA -Chicago Ceiling Plenum CCEA	MB -Matte Black	PG -Prismatic (T73) Lens					
E1LED -Transformer for use with LED MR16 lamps 120v	CR -Corrosion Resistant	CR -Corrosion Resistant	MW -Matte White	LN16 -See Recessed Fixtures/ Lens Options for Lens, Louver, and Filter Accessories					
NTR - No Transformer	FS -Fuse Holder and Fuse	FS -Fuse Holder and Fuse	PW -Pewter Alzak	WL -Wet Location (Requires Lens)					
	IC -Insulation Contact (See IC Options)	IC -Insulation Contact (See IC Options)	UM -Umber Alzak						
	MWL(**) -Maximum Wattage Dedicated Transformer and Label (20w, 37w, 50w)	MWL(**) -Maximum Wattage Dedicated Transformer and Label (20w, 37w, 50w)	WE -Wheat Alzak						
	PR -Plaster Ring	PR -Plaster Ring	BF -Black Flange						
	TBC -T-bar Clips	TBC -T-bar Clips	WF -White Flange						
	TR -Top Relamping Option	TR -Top Relamping Option	CC -Custom Color						
	EB -Eco Black Housing Finish	EB -Eco Black Housing Finish							
	* For Available Louvers and Lenses Consult Factory.	* For Available Louvers and Lenses Consult Factory.	Note: Polished Flange is Standard.						
				Consult factory for available Deco Trims.					

EXAMPLE: SGAG4SQ E1 / AR0204 SG GL

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.

PROJECT:	TYPE:
CAT. NO.:	

