
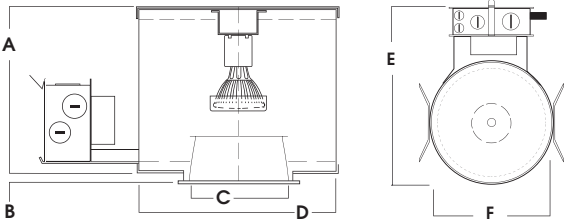


4" SQUARE DOWNLIGHT PAR16 / PAR20 LAMP

50 WATT MAX INCANDESCENT

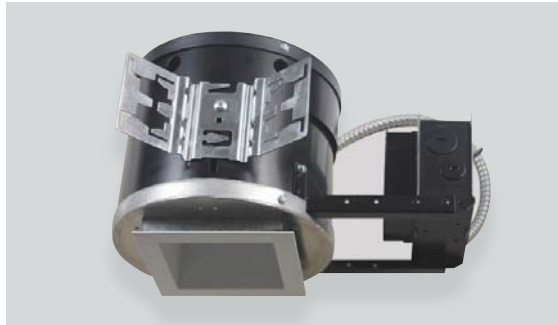

A	B	C	D	E	F
6.5	0.6	4.0	8.0	13.0	8.0
165.1 mm	15.8 mm	101.6 mm	203.2 mm	330.2 mm	203.2 mm

SGD4SQIN

APPLICATION

4" square PAR20 downlight for incandescent lamps.

FEATURES

Efficient trim design with a variety of lens options. Integral 5/8" (0.625) plaster ring. Maximum wattage label (MWL) for low wattage Incandescent or LED lamps. Multi-bar adjustable mounting brackets.

FINISH

Variety of powdercoat and anodized finishes available on trim. Eco Black (EB) finish available on frame/ housing.

ELECTRONICS

120 Volt is standard. Use option T277 for 277V supply feed.

CONSTRUCTION

Frame constructed of 20 ga. aluminum. Trim formed from .050 high purity aluminum and finished to specification.

LABELS

UL/ ETL listed for damp locations. Wet location available. Manufactured and tested to UL Standard No. 1598.

Max Ceiling Thickness:	1.0 (25.4 mm)
Ceiling Cutout:	5.0 ² (127.0 mm) ²
Fixture Weight:	4.7 lbs

SERIES	OPTIONS	TRIM / FINISH	TRIM OPTIONS	FIXTURE LAMPING*						
SGD4SQIN- Spectrum Gold 4" Vertical Square	BH27 -27" Bar Hangers (Supplied) CB24 -C-Channel Bars CCEA -Chicago Ceiling Plenum CR -Corrosion Resistant T277 -Step Down Transformer 277v to 120v FS -Fuse Holder and Fuse PR -Plaster Ring (Special Depth) MWL -Max Wattage Label (Specify Wattage) EB -Eco Black Housing Finish TBC -T-Bar Clips TR -Top Relamping Option	AR0404-SG -Semi-Diffuse Low-Iridescent (Standard) GM -Corrugated Soft Glow GO -Gold Alzak MB -Matte Black MW -Matte White PW -Pewter Alzak UM -Umber Alzak WE -Wheat Alzak BF -Black Flange WF -White Flange CC -Custom Color	GL -Clear Glass Lens GS Gasket SO -Micro Prism Solite™ Lens PG -Prismatic (T73) Lens LN -See Recessed Fixtures/ Lens Options for Lens, Louver and Filter Accessories WL -Wet Location	<table border="1"> <thead> <tr> <th>LAMP</th> <th>MAX. WATTAGE</th> </tr> </thead> <tbody> <tr> <td>PAR16</td> <td>45W</td> </tr> <tr> <td>PAR20</td> <td>50W</td> </tr> </tbody> </table> <p>*Medium Base</p>	LAMP	MAX. WATTAGE	PAR16	45W	PAR20	50W
LAMP	MAX. WATTAGE									
PAR16	45W									
PAR20	50W									
	*For Available Louvers and Lenses Consult Factory.	Note: Polished Flange is Standard.								

EXAMPLE: SGD4SQIN/AR0404 SG

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.

PROJECT:	TYPE:
CAT. NO.:	

