


4" SQUARE DOWNLIGHT MR16 LAMP

75 WATT MAX INCANDESCENT

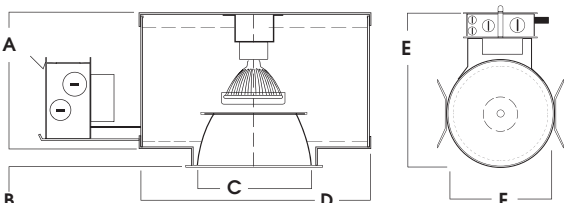

A	B	C	D	E	F
4.6 117.5 mm	0.6 15.8 mm	4.0 101.6 mm	8.0 203.2 mm	13.0 330.2 mm	8.0 203.2 mm

SGDG4SQ

APPLICATION

Square aperture MR16 downlight with good cutoff.

FEATURES

- Efficient trim design optimized for Halogen lamps.
- Integral 5/8" (0.625) plaster ring.
- Maximum wattage label (MWL) for low wattage Halogen or LED lamps.
- Tool-less transformer access.
- Multi-bar adjustable mounting brackets.

FINISH

Variety of powdercoat and anodized finishes available on trim.
Eco Black (EB) finish available on frame/ housing.

ELECTRONICS

120V Electronic transformer is standard.

CONSTRUCTION

Frame constructed of 20 ga. aluminum.
Trim formed from .050 high purity aluminum and finished to specification.

LABELS

UL/ ETL Listed for Damp Locations. Wet location available.
Manufactured and tested to UL Standard No. 1598.

Max Ceiling Thickness:	1.0 (25.4 mm)
Ceiling Cutout:	5.0 ² (127.0 mm) ²
Fixture Weight:	5.0 lbs

SERIES	TRANSFORMER	OPTIONS	TRIM / FINISH	TRIM OPTIONS	FIXTURE LAMPING				
SGDG4SQ- Spectrum Gold 4" Vertical Square	E1 -Electronic, 120V	BH27 -27" Bar Hangers (Supplied)	AR0404-SG -Semi-Diffuse Low-Iridescent (Standard)	GL -Clear Glass Lens GS -Gasket SO -Micro Prism Solite™ Lens PG -Prismatic (T73) Lens LN16 -See Recessed Fixtures/ Lens Options for Lens, Louver, and Filter Accessories WL -Wet Location (Requires Lens)	<table border="1"> <thead> <tr> <th>LAMP</th> <th>MAX. WATTAGE</th> </tr> </thead> <tbody> <tr> <td>MR-16</td> <td>75w</td> </tr> </tbody> </table>	LAMP	MAX. WATTAGE	MR-16	75w
	LAMP	MAX. WATTAGE							
MR-16	75w								
E2 -Electronic, 277V	BH6 -Expandable Bar Hangers, 6" - 12"	BH12 -Expandable Bar Hangers, 12" - 24"	GM -Corrugated Soft Glow	* For 75w lamp, use Philips or Ushio-America or Consult Factory					
MGN1 -Magnetic Transformer 120V	BH12 -Expandable Bar Hangers, 12" - 24"	CB24 -C-Channel Bars	GO -Gold Alzak						
MGN2 -Magnetic Transformer 277V	CCEA -Chicago Ceiling Plenum CCEA	CR -Corrosion Resistant	MB -Matte Black						
E1LED -Transformer for use with LED MR16 lamps 120v	FS -Fuse Holder and Fuse	IC -Insulation Contact (See IC Options)	MW -Matte White						
NTR - No Transformer	MWL(**) -Maximum Wattage Dedicated Transformer and Label (20w, 37w, 50w)	PR -Plaster Ring	PW -Pewter Alzak						
		TBC -T-bar Clips	UM -Umber Alzak						
		TR -Top Relamping Option	WE -Wheat Alzak						
		EB -Eco Black Housing Finish	BF -Black Flange						
		* For Available Louvers and Lenses Consult Factory.	WF -White Flange						
			CC -Custom Color						
			Note: Polished Flange is Standard.						
				Consult factory for available Deco Trims.					

EXAMPLE: SGDG4SQ E1 / AR0404 SG GL

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

