



SPIKE SCONCE

MR16 SERIES / 50 WATT MAX INC

speculume
decorative



FRMC0314UDINC

APPLICATION

Spike Sconce for decorative wall accent lighting.

FEATURES

Speculume series fixtures offers contemporary style with functional luminaire performance. All fixtures are designed and manufactured in our factory. Spike wall sconce sits flat against wall and projects "Hot" light pattern against wall for dramatic effect. A variety of lens, wattage and other options available.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

ELECTRONICS


50 watt max MR16. 120 volt standard (E1). 277 volt optional (E2).

CONSTRUCTION

Fixtures are fabricated in our factory from aluminum extrusion.

LABELS

ARRA Compliant. ETL/UL/CSA listed for damp locations. Manufactured and tested to UL standards No. 1598.

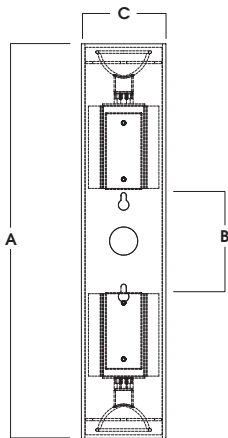

A	B	C
14.0 355.6 mm	3.5 O.C. 88.9 mm	3.0 SQ 76.2 mm



Detail: Key slots engage hardware at wall box. KO for Power Feed

SERIES	LAMPS	BALLAST	MOUNTING	FINISH
FRMC0314UDINC	2 x MR16 50W Max	E1-Electronic, 120v E2-Electronic, 277v E1LED-Electronic 20W 12v LED Rated Transformer MWL-Label with Max Wattage	SMF-Surface Mount Flush Integral Keyslots LENS LN16- Lens See Lens Pages HL16- Hex Louver	MW- Matte White MB- Matte Black GW- Gloss White GB- Gloss Black BZ- Bronze OB- Oil Rubbed Bronze PT- Platinum SI- Silver CH- Charcoal GH- Graphite AM- Anodic Malachite SN- Sun Gold BL- Blue Streak RD- Red Baron CO- Copper Metallic CC- Custom Color
			*Accessory Finish will Match Fixture	Consult Factory for Custom or Metal Finishes

EXAMPLE: FRMC0314UDINC 2XMR16E1/SMF SN

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

WWW.SPECLIGHT.COM • 994 JEFFERSON STREET, FALL RIVER, MA 02721 • 508.678.2303 FAX 508.678.2260

