



ALUMINUM DECO TIER

INC



RTAL0608INC

APPLICATION

Aluminum Deco Tier features floating aluminum shade to obscure light source and cast a decorative light pattern on ceiling. INC Series is designed for indoor damp locations or outdoor wet locations.

FEATURES

Speclume series fixtures offer simple contemporary style with functional luminaire performance. All fixtures are designed and manufactured in our factory. The Aluminum Deco Tier floats with micro suspended shade. A variety of finishes and mounting options are available.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

ELECTRONICS


E26 Edison medium base 120V socket for incandescent or LED lamps. Contact factory for other available socket options.

CONSTRUCTION

Fixtures constructed of spun and fabricated aluminum.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750

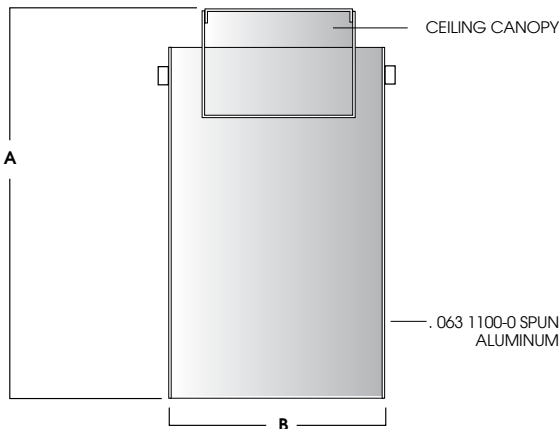

A	B
11.3	6.0
287.02 mm	152.4 mm

SERIES	MOUNTING/OPTIONS	FINISH
RTAL0608INC	CD*- Cord and Cable Mount HM*- Hang Straight Pendant HMAT*- Adjustable Length Hang Straight Pendant PM*- Pendant/Straight Mount SM-Surface Mount FS-Fuse Holder and Fuse	MW-Matte White MB-Matte Black GW-Gloss White GB-Gloss Black BZ-Bronze OB-Oil Rubbed Bronze PT-Platinum SI-Silver BA-Brushed Aluminum CH-Charcoal GH-Graphite AM-Anodic Malachite SN-Sun Gold BL-Blue Streak RD-Red Baron CO-Copper Metallic CC-Custom Color
	*Specify Length in Inches	Consult Factory for Custom or Metal Finishes

EXAMPLE: RTAL0608INC/SM BA

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
CAT. NO.:	

WWW.SPECLIGHT.COM • 994 JEFFERSON STREET, FALL RIVER, MA 02721 • 508.678.2303 FAX 508.678.2260

