



ETCHED TRIPLEX ITALIAN GLASS

GV SERIES / 2700 LUMENS MAX LED

speculume decorative



TX-LEDGV

APPLICATION

Piazza TX Series Italian Triplex glass LED surface luminaire for decorative area lighting.

FEATURES

Clear inner layer, opal center, etched outer layer for soft diffused lighting. Integral aluminum heatsink dissipates heat. 50,000 hours rated LED system life. Wall, ceiling, or pendant mounting.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes.

ELECTRONICS


GV LED system features high brightness white Samsung LED's. 3 step MacAdam Ellipse binning. Standard CRI: 85+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixtures are spun in our factory from 0.063 high purity aluminum. Passive aluminum heatsink for optimal thermal management. Glass made in Italy, fixture made in the USA.

CODE COMPLIANCE

ARRA Compliant. ETL listed for damp locations. ADA Compliant, excluding: TX1905LEDGV. Manufactured and tested to UL Standard No. 1598/8750.

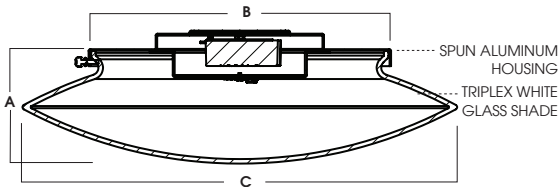

SERIES	A	B	C
TX1303LEDGV	4.3	6.8	11.9
TX1604LEDGV	4.7	6.8	14.9
TX1905LEDGV	5.3	6.8	17.5

WATTAGE TO LUMENS UPDATE

CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS ¹	SYSTEM WATTS
TX1303LEDGV15L	TX1303LEDGV14W	1500	9
TX1303LEDGV27L	TX1303LEDGV26W	2700	16

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ³	OPTIONS ⁴	MOUNTING ⁵	FINISH ⁷
TX1303LEDGV ²	15L 1500 Lm	27K 2700K	EX Electronic Driver, 120V/277V	FS Fuse Holder and Fuse	WM Wall Mount	MW ⁸ Matte White
TX1604LEDGV	27L 2700 Lm	30K 3000K	DS10X 10% 0-10V Dimming, 120V/277V	GS Ceiling Level Gasket	SM Surface Mount	MB ⁸ Matte Black
TX1905LEDGV		35K 3500K	DO10X 1% 0-10V Dimming, 120V/277V		HM ⁶ Hang Straight	PT ⁸ Platinum
		40K 4000K	DS2W1 2 Wire Phase Dimming, 120V		PM ⁶ Rigid Pendant	TW Textured White
			DLTE1 ³ Lutron 2 Wire Phase Dimming, 120V Only			TB Textured Black
						MT Textured Silver
						BZ Bronze
						OB Oil Rubbed Bronze
						CH Charcoal
						GH Graphite
						AC Champagne
						SN Sun Gold
						BR Breccia Rust
						AN Anodic Natural
						CO Copper Metallic
						CC Custom Color

EXAMPLE: TX1303LEDGV15L35KEXGSSMMW

NOTES:

1 Nominal Source Lumens at 3500K 2 Available With 15L Only 3 Contact Factory for Additional Options 4 See Product Options Page for Details
5 See Mounting Page for Details on Components and Finishes 6 Specify Length in Inches: See Mounting Page for Available Lengths
7 Contact Factory for Special Finishes 8 Standard Finishes

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



PROJECT:	TYPE:
CAT. NO.:	





SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF SPECLUME SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.


MOUNTING TYPES

HM*
HANG STRAIGHT
45° SWIVEL 1/2" STEM - 3/8" NPT




ORDER: **HM** (Length)
SPECIFY LENGTH:
HM3 - 3" **HM24** - 24"
HM6 - 6" **HM36** - 36"
HM12 - 12" **HM48** - 48"
HM18 - 18" **HM72** - 72"
HMLC(XX)
Custom Length
(Specify in Inches)

HMAT*
HANG STRAIGHT ALL THREAD
45° SWIVEL 1/2" STEM - 1/4" IP




ORDER: **HMAT** (Length)
SPECIFY LENGTH:
HMAT12 - 12"
HMAT24 - 24"
HMAT36 - 36"
HMAT48 - 48"
HMAT72 - 72"
HMATLC(XX)
Custom Length
(Specify in Inches)



*MAXIMUM ONE PIECE STEM LENGTH IS 72". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.

PM*
RIGID PENDANT MOUNT
RIGID 1/2" STEM - 3/8" NPT



ORDER: **PM** (Length)
SPECIFY LENGTH:
PM3 - 3" **PM24** - 24"
PM6 - 6" **PM36** - 36"
PM12 - 12" **PM48** - 48"
PM18 - 18" **PM72** - 72"
PMLC(XX)
Custom Length
(Specify in Inches)

CD
CORD / CABLE MOUNT
SJ CORD WITH 1/16 SS CABLE



ORDER: **CD** (Length)
SPECIFY LENGTH:
CD36 - 36"
CD72 - 72"
CD144 - 144"
CDLC(XX)
Custom Length
(Specify in Inches)

CM
CORD MOUNT
SJ CORD STRAIN RELIEF



ORDER: **CM** (Length)
SPECIFY LENGTH:
CM36 - 36"
CM72 - 72"
CM144 - 144"
CMLC(XX)
Custom Length
(Specify in Inches)

CHN
CHAIN MOUNT
SJ CORD / DECORATIVE CHAIN



ORDER: **CHN** (Length)
SPECIFY LENGTH:
CHN36 - 36"
CHN72 - 72"
CHN144 - 144"
CHNLC(XX)
Custom Length
(Specify in Inches)

MOUNTING FINISH


Standard Canopy / Stem or Cord mounting finish is matte white. Black fixtures receive matte black mounting finish, silver fixture receive silver mounting finish. Custom colors for canopy and stem are available upon request.

MOUNTING COMPONENTS FINISH


FIXTURE COLOR	CANOPY / STEM / CORD COLOR
Matte White, Textured White	Matte White
Matte Black, Textured Black, Bronze, Oil Rubbed Bronze	Matte Black
Platinum, Textured Silver, Silver	Silver
All Others	Matte White
Custom Color	Canopy / Stem Same Color as Fixture

EMERGENCY BATTERY OPTIONS

EMCP7W - LARGE DRIVER CANOPY FOR 7W EMERGENCY BATTERY (FOR ALL CEILING MOUNT TYPES)




EMLN7W - 7W IN-LINE EMERGENCY BALLAST (FOR HM, HMAT, AND PM OPTIONS)



REMOTE EMERGENCY BATTERY OPTIONS

EMRM7W - REMOTE EMERGENCY BATTERY (UP TO 12W, 50' MAX)




EM WATTAGE	A	B	C
EMRM5W	1.5	9.0	9.5
EMRM7W*	1.3	12.6	13.0
EMRM12W	1.3	12.8	13.3

*STANDARD




EMEN7W - REMOTE EMERGENCY BATTERY WITH ENCLOSURE (UP TO 12W, 50' MAX)



ENCLOSURE	A	B	C
EMEN5W	2.0	17.0	6.2
EMEN7W*	2.0	17.0	6.2
EMEN12W	2.0	17.0	6.2

*STANDARD



Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.

PROJECT:	TYPE:
CAT. NO.:	