

WARNING: Be certain all power is OFF! Wire according to local and national codes. This product should be installed by a qualified electrician.

Before installation:

Remove 4 screws from face of CP104 and reserve.

Thread fixture wire leads through mounting pipe, from top of open fixture.

Connect pipe to fixture (securing by Coupling and tightening).

Installation Instructions:

1. Mount assembly CP104 to wall (hardware by others).
Make power connections to driver.


Bring fixture and Mounting pipe up to CP104 housing.
Connect pipe to face of CP104 (use set screws to secure).

Make connection between leads and driver.

2. Swing face of CP104 with fixture up to wall compartment.

Reattach face assembly to CP104 body secure with hardware reserved.

3. Adjust to the desired position and tighten the Wing nut.

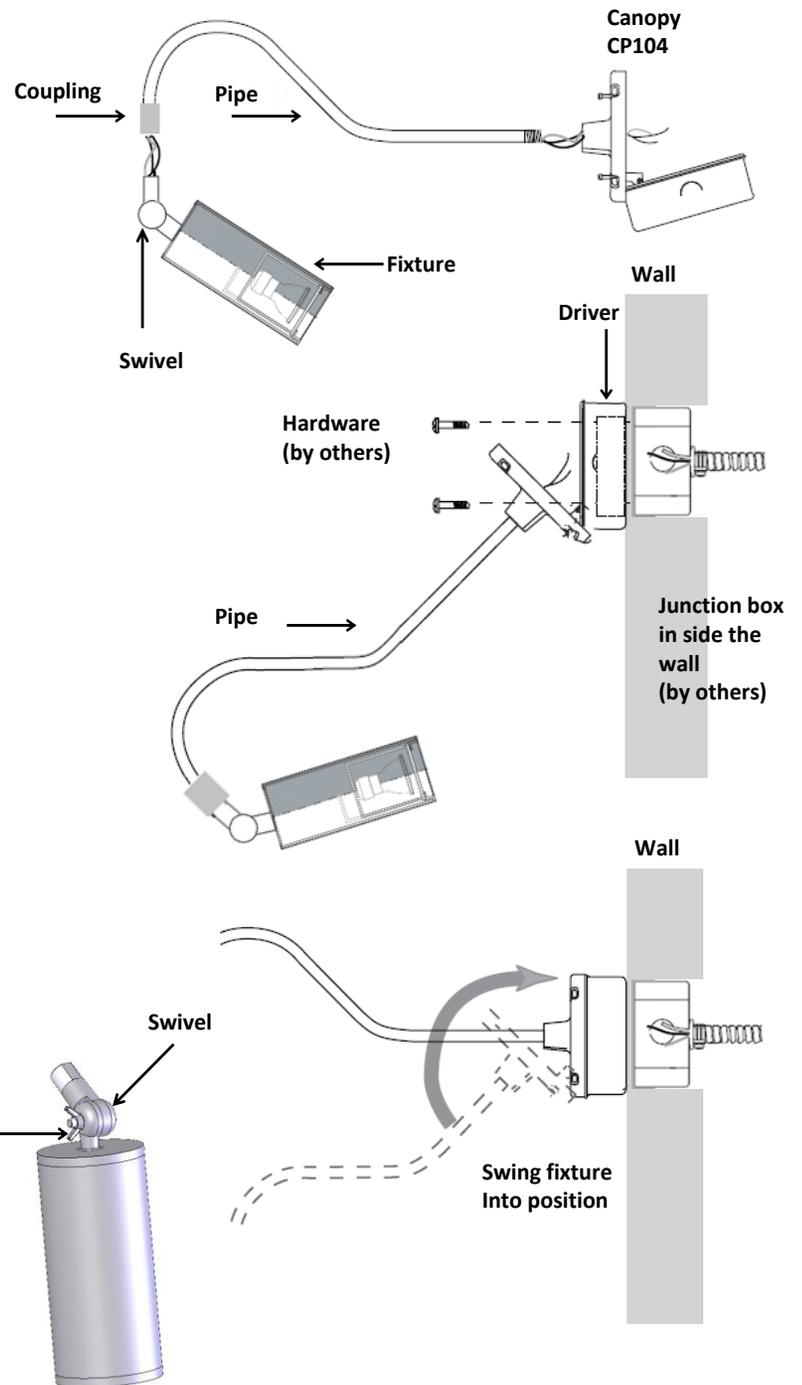

Note: Wrap threads with Teflon tape. Connections must be waterproof; Silicone – seal all pipe connections.