




**CLOUD 10" ROUND  
SURFACE LIGHT**  
GV SERIES / 1500 LUMENS

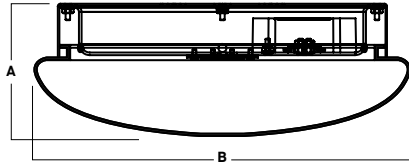

A	B
3.9 99.1 mm	11.0 279.4 mm

PROJECT: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

**SX1003RDLEDGV**

**APPLICATION**

Cloud 10" surface light for area illumination.

**FEATURES**

SpecLume series fixtures offer contemporary style with functional luminaire performance. Fixtures designed and manufactured in our factory. Fixture produces horizontal and vertical illumination. Designed for through wiring. Reflective gloss white reflector behind LED for enhanced light output. Interchangeable LED module for ease of maintenance. A variety of mounting options are available.

**FINISH**

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes.

**ELECTRONICS**

GV LED system features high brightness white Samsung LED's. 3 step MacAdam Ellipse binning. Standard CRI: 85+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

**CONSTRUCTION**

Fixtures are spun in our factory from .063 high purity aluminum. Passive aluminum heatsink for optional thermal management. Formed UV stabilized opal white acrylic diffuser.

**CODE COMPLIANCE**

BAA Compliant. ETL listed for damp locations. ADA Compliant. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE			
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS <sup>1</sup>	SYSTEM WATTS
SX1003RDLEDGV15L	SX1003RDLEDGV14W	1500	9

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING <sup>2</sup>	OPTIONS <sup>3</sup>	MOUNTING <sup>4</sup>	DIFFUSER	FINISH <sup>6</sup>
<b>SX1003RDLEDGV</b>	<b>15L</b> 1500 Lm	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>EX</b> Electronic Driver, 120V/277V <b>DO10X</b> 1% 0-10V Dimming, 120V/277V <b>DS2W1</b> 2 Wire, MLV Dimming, 120V	<b>FS GS</b> Fuse Holder and Fuse Ceiling Level Gasket	<b>SM</b> Surface Mount <b>HM<sub>S</sub></b> Hang Straight <b>PM<sub>S</sub></b> Rigid Pendant <b>WM</b> Wall Mount	<b>OP</b> White Opal Acrylic <b>POP</b> White Opal Polycarbonate	<b>MW<sup>7</sup></b> Matte White <b>MB<sup>7</sup></b> Matte Black <b>PT<sup>7</sup></b> Platinum Silver <b>CC</b> Custom Color

**EXAMPLE: SX1003RDLEDGV15L35KEXSMOPMW**

**NOTES:**  
 1 Nominal Source Lumens at 3500K 2 Contact Factory for Additional Options 3 See Product Options Page for Details 4 See Mounting Page for Details on Components and Finishes 5 Specify Length in Inches: See Mounting Page for Available Lengths 6 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 7 Standard Finishes

