


5" ROUND DOWNLIGHT

PAR20 - PAR30 SERIES / 75 WATT MAX INC

recessed fixtures

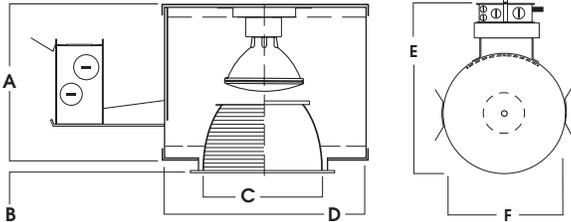

A	B	C	D	E	F
6.5	0.6	5.0	8.5	16.0	8.5
165.1 mm	15.8 mm	127.0 mm	215.9 mm	406.4 mm	215.9 mm

SGD5IN

APPLICATION

5" Round PAR20/PAR30 downlight for incandescent lamps.

FEATURES

- Efficient trim design with a variety of lens options. Integral 5/8" (0.625) plaster ring.
- Maximum wattage label (**MWL**) for low wattage Incandescent or LED lamps.
- Multi-bar adjustable mounting brackets.

FINISH

Variety of powdercoat and anodized finishes available on trim. Eco Black (**EB**) finish available on frame/ housing.

ELECTRONICS

120 Volt is standard. Use option **T277** for 277V supply feed.

CONSTRUCTION

Frame constructed of 20 ga. aluminum. Trim spun from .063 high purity aluminum and finished to specification.

LABELS

UL/ETL Listed for Damp locations. Wet location available. Manufactured and tested to UL Standard No. 1598.

SERIES	OPTIONS	TRIM / FINISH	LENS OPTIONS	FIXTURE LAMPING*								
SGD5IN- Spectrum Gold 5" Vertical	BH27 -27" Bar Hangers (Supplied) CB24 -C-Channel Bars CCEA -Chicago Ceiling Plenum CR -Corrosion Resistant T277 -Step Down Transformer 277v to 120v FS -Fuse Holder and Fuse PR -Plaster Ring (Special Depth) MWL -Max Wattage Label (Specify Wattage) EB -Eco Black Housing Finish TBC -T-Bar Clips TR -Top Relamping Option	AR5400-SG -Semi-Diffuse Low-Iridescent (Standard) CL -Clear Bright Alzak GO -Gold Alzak HZ -Matte Low Iridescent PW -Pewter Alzak UM -Umber Alzak WE -Wheat Alzak BK -Black Finish WH -White Finish PF -Polished Flange BB -Black Micro Baffle WB -White Micro Baffle AR5450-** -Finished as Specified <div style="text-align: center; border: 1px solid black; padding: 5px; margin-top: 10px;"> Note: White Flange is Standard. </div>	GL -Clear Glass Lens GS -Gasket SO -Micro Prism Solite™ Lens PG -Prismatic (T73) Lens LN -See Recessed Fixtures/ Lens Options for Lens, Louver and Filter Accessories WL -Wet Location	<table border="1" style="margin: auto; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">LAMP</th> <th style="width: 50%;">MAX. WATTAGE</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">PAR20</td> <td style="text-align: center;">50w</td> </tr> <tr> <td style="text-align: center;">PAR30</td> <td style="text-align: center;">75w</td> </tr> <tr> <td colspan="2" style="text-align: center;">*Medium Base</td> </tr> </tbody> </table>	LAMP	MAX. WATTAGE	PAR20	50w	PAR30	75w	*Medium Base	
LAMP	MAX. WATTAGE											
PAR20	50w											
PAR30	75w											
*Medium Base												

*For Available **Decorative Architectural Trims**. Consult Factory.

EXAMPLE: SGD5IN/ AR5400 SG



PROJECT: _____
 TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.