

EXAMPLE: SV1007INC/FJ1/HM36/MW

 1 See Enclosures & Guards Page for Wire Guards and Additional Options
 2 Standard Enclosure
 3 See Mounting Pages Options and Details on Components and Finishes


 4 See Mounting Page for Available Arm Options
 5 Specify Length in Inches: See Mounting Page for Available Lengths
 6 See Color Page for More Options/Consult Factory for Special Finishes



ILLUMINATING WHAT'S POSSIBLE.



HOUSING DIMENSIONS



Dimensioned with SV1411INC

SERIES	Α	В
SV1007INC	10.1	8.0
SV1411INC	14.9	11.4

SERIES SIZES SV1007INC





ENCLOSURES

FJ1 3" FROSTED GLASS

GJ1 3" CLEAR GLASS



3 OLEAR OLA



ENCLOSURE WIRE GUARDS

APPLICATION

The Stagecoach Shade RLM has a classic bell shape for decorative downlighting.

FEATURES

Spectrum Lighting's RLM Classics are inspired by vintage lighting fixtures redesigned with modern LED light sources and materials. The wide range of options for illumination, mounting, enclosures, guards and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Matte White interior standard.

ELECTRONICS

E26 Edison medium base 120V socket for incandescent or LED lamps.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall mount canopies are die-cast aluminum with stainless steel hardware. Wall arms are formed 3/4 NPT aluminum pipe and may be field cut.

CODE COMPLIANCE


BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Wet Location Option. Manufactured and tested to UL standards No. 1598/8750.

MOUNTING & ACCESSORIES


SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




WALL MOUNTING



CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY, ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.

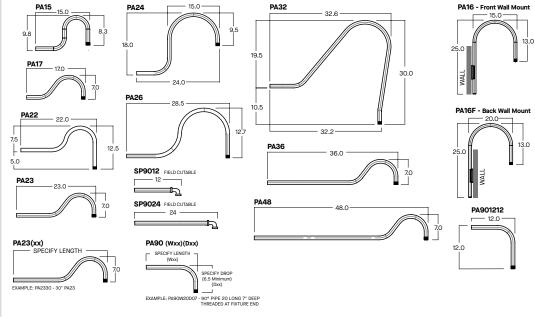

CEILING MOUNTING

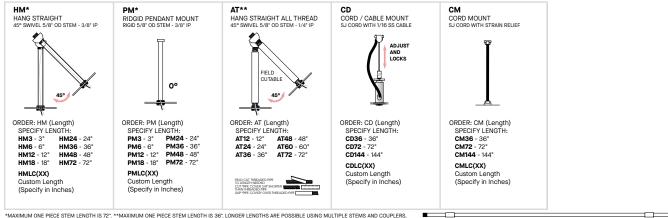

MAXIMUM ONE PIECE STEM LENGTH IS 72", **MAXIMUM ONE PIECE STEM LENGTH IS 36", LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS. **ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT



ILLUMINATING WHAT'S POSSIBLE.

COLOR OPTIONS - POWDER COAT PAINT FINISHES


NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.

STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR	TIER	COST	AVERAGE PAINT TIME*
Matte White, Textured White	Matte White	Matte White	Tier 1 - Standard Finishes	\$	O
Gloss White	Matte White	Gloss White	Tier 2 - Typical Finishes	\$\$	00
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black	Tier 3 - Special Metal Finishes	\$\$\$	000
All Others	Matte Black	Same Color as Fixture	Custom Color	Contact Factory	Contact Factory
Custom Color	Contact Factory	Contact Factory	*CONTACT FACTORY FOR SPECIFIC PRO	DUCT LEAD TIMES	

PAINT TIMES

TIER 1 - STANDARD FINISHES




TIER 2 - TYPICAL FINISHES



TIER 3 - SPECIAL METAL FINISHES

NOT AVAILABLE ON ALL FIXTURES. PLEASE CONSULT SPECIFICATION SHEETS OR FACTORY FOR AVAILABILITY.



CUSTOM COLOR FINISHES

CONTACT FACTORY

CC Custom Color



*UNAVAILABLE FOR WET LOCATION ** UNAVAILABLE FOR INTERIOR

