



WALL MOUNT
MINI CONCORDIA
DAMP / WET LOCATION
TIERS

PROJECT: _____

QUANTITY: _____

TYPE: _____



CN1308GV
MB - Matte Black



CN1308GV
PT - Platinum Silver



CN1308GV
AS - Anodic Sapphire



CN1308GV
AN - Anodic Natural

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²	ACCESSORIES	MOUNTING ³	FINISH ⁵	WET KIT
CN1308GV	15L 1500 Lm	80 CRI 27K 2700K 30K 3000K 35K 3500K 40K 4000K 90 CRI 27HK 2700K 30HK 3000K 35HK 3500K 40HK 4000K	EX DS2W1 D010X Electronic Driver, 120V/277V ELV/MLV, 120V 1%, 0-10V, 120V/277V	FJO 2" Frosted Tall	CP104 CP104KO CP6/RMD SP ⁴ EMRM EMEN Small Driver Canopy Small Driver Canopy w/ Knockouts Remote Mount Driver Straight Arm Mounting 7W Remote EM 7W Remote with Enclosure	MW ⁶ Matte White MB ⁶ Matte Black PT ⁶ Platinum Silver CC Custom Color	WLKA Wet Location Kit

EXAMPLE: CN1308GV15L35KEXFJO/CP104SP10RD

NOTES:
1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 See Mounting Page for Details on Components and Finishes
4 See Mounting Page for Available Arm Options 5 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 6 Standard Finishes






WALL MOUNT MINI CONCORDIA DAMP / WET LOCATION TIERS

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
CN1308GV15L	1500	605	10	61

¹ Nominal Source Lumens at 35K ² Nominal Delivered Lumens at 35K

HOUSING DIMENSIONS

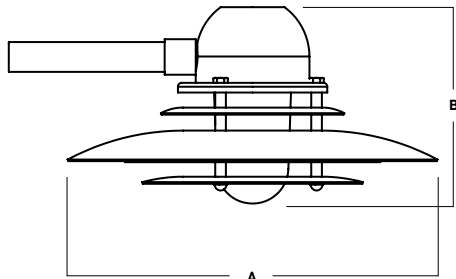

A	B
13.0 230.2 mm	6.9 175.3 mm

APPLICATION

The Wall Mount Mini Concordia is one of our most elegant RLM styles.

FEATURES

Spectrum Lighting's RLM Classics are reproductions of Classic lighting fixtures reimagined with modern LED light sources and materials. The wide range of options for illumination and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Interior painted same finish as exterior.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall mount canopies are cast aluminum with stainless steel hardware.

CODE COMPLIANCE


BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Wet Location Option. Manufactured and tested to UL standards No. 1598/8750.

WALL MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & DIMENSIONS.)

SP_

MOUNTING ARM STYLE

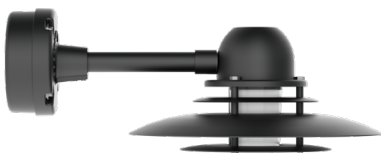

CN1308GV SHOWN WITH CP104SP12





WALL MOUNT MINI CONCORDIA DAMP / WET LOCATION TIERS / PHOTOMETRIC DATA

CN1308 15L 35K XX FJ0

CANDLEPOWER CURVE TEST SP-01025	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS		SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE		MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT										
	0.00°	0° - 20°	75	12%	Mounting Height AFF	FC at Center on Floor	Ceiling Height	Fixture Spacing	RCR 2		RCR 4					
	0.00° 237	20° - 50°	184	30%	6.5 '	6 fc			FC +	W/Sq. Ft.	FC +	W/Sq. Ft.				
	20.00° 164	50° - 80°	183	30%	7.5 '	4 fc	9'	4'	31	0.65	17	0.48				
	40.00° 85	80° - 90°	78	13%	8.5 '	3 fc	12'	6'	13	0.27	7	0.20				
	60.00° 49	0° - 90°	520	86%	10.0 '	2 fc	16'	8'	8	0.16	6	0.16				
	80.00° 86	90° - 120°	80	13%	12.0 '	2 fc	Delivered Illuminance Rating: (DIR)		47 FC per W/Sq. Ft.		37 FC per W/Sq. Ft.					
	90.00° 55	120° - 150°	4	1%	14.0 '	1 fc	1' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 3.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 3.5' x 2.50 + Average Footcandles at 2.5' Above Floor									
	100.00° 34	Total	605	100%	16.0 '	1 fc										
	110.00° 13				20.0 '	1 fc										
	120.00° 4															
	140.00° 1															
	160.00° 1															
	180.00° 1															
Delivered Lumens: 605 Luminaire Watts: 10 LER: 60.50	CP at 0deg (Nadir): 237 CRI: 80+	Lumen Multiplier: Only 15L offered CCT Multiplier: 27K x 0.97, 30K x 0.99, 40K x 1.03														


MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




WALL MOUNTING

CP104 - SMALL DRIVER CANOPY (STANDARD)
MAY BE USED AS SPLICE BOX FOR DIRECT FEED

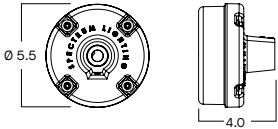

CP6/RMD - REMOTE MOUNT DRIVER
MOUNTS DIRECTLY TO WALL OR OCTAGON STYLE J-BOX



CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY.
ARMS MAY BE FIELD CUT ON WALL SIDE -FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.


SP(xx) 6", 12" & 24"
Designed for Straight Arm Mounting

SPECIFY LENGTH

EXAMPLE: SP6 - STRAIGHT PIPE 6" LONG


REMOTE EMERGENCY BATTERY OPTIONS

EMRM* - 7W REMOTE EMERGENCY BATTERY
(50" MAX)



A	B	C
1.3	12.6	13.0

EMEN* - 7W REMOTE EMERGENCY BATTERY
WITH ENCLOSURE (50" MAX)



A	B	C
2.0	17.0	6.2

*OTHER EM BATTERY SIZES AVAILABLE, CONTACT FACTORY.

