

CN1308GV AC - Anodic Champagne CN1308GV MB - Matte Black CN1308GV BR - Brecchia

SERI	IES	LUMENS ¹		ССТ		DRIVER / DIMMING ²		ACCESSORIES		MOUNTING ³		FINISH ⁷		WET KIT	
CN130	D8GV	15L	1500 Lm	27K 30K 35K 40K 90 27HK 30HK	2700K 3000K 3500K 4000K 2 CRI 2700K 3000K 3500K	DS2W1	Electronic Driver, 120V/277V ELV/MLV, 120V 1%, 0-10V, 120V/277V	FJO	2" Frosted Tall	HM_5 AT_5 PM_5 CD_5 CM_5 EMCR ⁶ EMRM	Small Driver Canopy Hang Straight All Thread Rigid Pendant Mount Cord / Cable Mount Cord Mount 10W Large Driver Canopy EM 7W Remote EM 7W Remote with Enclosure	MB ⁸ PT ⁸ CC	Matte White Matte Black Platinum Silver Custom Color See Page 5 r Full Range of	WLKA	Wet Location Kit
					4000K								Color Options (83-90083)		

EXAMPLE: CN1308GV15L35KEXFJ0/RDC5PM36C0

NOTES:

 I Nominal Source Lumens at 35K
 2 Contact Factory for Additional Options
 3 See Mounting Page for Details on Components and Finishes
 4 Required for All Drivers

 5 Specify Length in Inches: See Mounting Page for Available Lengths
 6 EMCR Replaces RDC5
 7 See Color Page for More Options/Consult Factory for Special Finishes

 8 Standard Finishes






PENDANT MOUNT MINI CONCORDIA

DAMP / WET LOCATION TIERS

LUMENS / WATTAGE DATA										
PART NUMBER	SOURCE LUMENS	DELIVERED LUMENS ²	SYSTEM WATTS	LPW						
CN1308GV15L	1500	605	10	61						

HOUSING DIMENSIONS



APPLICATION

The Pendant Mount Mini Concordia is one of our most elegant RLM styles. GV Series is designed for damp or dry locations.

FEATURES

Spectrum Lighting's RLM Classics are reproductions of Classic lighting fixtures reimagined with modern LED light sources and materials. The wide range of options for illumination, mounting and finishes allows for creative fixture specification and design. Fixture may be pendant mounted. LED module and driver are serviceable for future replacement.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Interior painted same finish as exterior.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Mounting hub is die-cast aluminum.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM HANG STRAIGHT / ALL THREAD / PENDANT



CN1308GV SHOWN WITH RDC5PM




CN1308GV SHOWN WITH RDC5CD

SPECLIGHT.COM · 994 JEFFERSON ST. FALL RIVER, MA 02721 · 508.678.2303



CN1308GV SHOWN WITH RDC5CM




ILLUMINATING WHAT'S POSSIBLE.



PENDANT MOUNT **MINI CONCORDIA DAMP / WET LOCATION**

CN1308 15L 35K XX FJ0




Luminaire Watts: 10 LER: 60.50

CP at Odeg (Nadir): 237 CRI: 80+

TIERS / PHOTOMETRIC DATA

INTENSITY ZONAL LUMENS CANDELA 0° AZIMUTH				SINGLE UNIT: PER INITIAL FOOTCAI BASED ON IES BE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT									
	0.00°	0° - 20° 75 12%		12%	Mounting Height	FC at Center on Floor	Ceiling	Fixture		RCR 2	RCR 4			
0.00° 20.00°	237 164	20° - 50°	184	30%			Height	Spacing	FC ⁺	W/Sq. Ft.	FC *	W/Sq. Ft.		
40.00°	85	20 00	104		6.5 '	6 fc	9'	4'	31	0.65	17	0.48		
40.00°	49	50° - 80°	183	30%	7.5 '	4 fc	12'	6'	13	0.27	7	0.20		
80.00°	86	80° - 90°	78	13%	8.5 '	3 fc	16'	8'	8	0.16	6	0.16		
90.00°	55				10.0 '	2 fc	10	0	°	0.16	°	0.18		
100.00°	34	0° - 90°	520	86%	10.0	210	Delivered Illuminance		17.50		07.50	27.50		
110.00°	13		0.0	1.07	12.0 '	2 fc	Rating: (47 FC	per W/Sq. Ft.	37 FC per W/Sq. Ft.			
120.00°	4	90° - 120°	80	13%	14.0 '	1 fc		nsion Lena	th					
140.00°	1	120° - 150°	4	1%	1/0	1.6-	Square r	ooms used	d for mul	for multiple units:				
160.00°	1				16.0 ' 1 fc		 RCR 2: Length & Width = Ceiling Ht3.5' x 5.00 RCR 4: Length & Width = Ceiling Ht 3.5' x 2.50 							
180.00°	1	Total	605	100%	20.0 '	1 fc	+ Average Footcandles at 2.5' Above Floor							

Lumen Multiplier: Only 15L offered CCT Multiplier: 27K x 0.97, 30K x 0.99, 40K x 1.03



ILLUMINATING WHAT'S POSSIBLE.


SPECLIGHT.COM · 994 JEFFERSON ST. FALL RIVER, MA 02721 · 508.678.2303


MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



CEILING MOUNTING

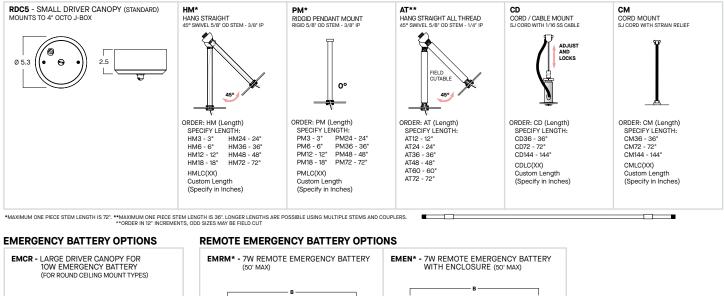



1.3

в

12.6

с

13.0

с


6.2

в

17.0

2.0

*OTHER EM BATTERY SIZES AVAILABLE, CONTACT FACTORY.



ILLUMINATING WHAT'S POSSIBLE.

SPECLIGHT.COM · 994 JEFFERSON ST. FALL RIVER, MA 02721 · 508.678.2303

COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.

STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR	TIER	COST	AVERAGE PAINT TIME*	
Matte White, Textured White	Matte White	Matte White	Tier 1 - Standard Finishes	\$	Ū	
Gloss White	Matte White	Gloss White	Tier 2 - Typical Finishes	\$\$	00	
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black	Tier 3 - Special Metal Finishes	\$\$\$	000	
All Others	Matte Black	Same Color as Fixture	Custom Color	Contact Factory	Contact Factory	
Custom Color	Contact Factory	Contact Factory	*CONTACT FACTORY FOR SPECIFIC PRO	DUCT LEAD TIMES		

PAINT TIMES


TIER 1 - STANDARD FINISHES



TIER 2 - TYPICAL FINISHES



TIER 3 - SPECIAL METAL FINISHES



CUSTOM COLOR FINISHES

CONTACT FACTORY



*UNAVAILABLE FOR WET LOCATION

Spectrum Lighting

