

Indoor Distribution Test Report

Spectrum Lighting Inc.

994 Jefferson Street
Fall River, MA 02721
+1.508.678.2303

Spectrum Lighting Photometric Lab

Luminaire

GL04IND48LX 12L 35K EX DW XX MW

Milltown Light 5.1" Wide x 48" linear pendant or surface mount luminaire

Test Number

SP-00618_1_M-12L

Test Date

The results contained in this report pertain only to this IES file.

Summary of Results

Power

Input Watts	36 W
-------------	------

Lumen Output

Output Lumens	4363
Efficacy	121.2 lm/W

Luminous Dimensions

0° - 180° Size	0.43
90° - 270° Size	4.02
Height	0.17

Spacing Criterion

Two luminaires, plane 0°	1.36
Two luminaires, plane 90°	1.23
Four luminaires	1.45


Full Beam Angle

0° - 180°	139°
90° - 270°	108°

IES File Header Contents

Keyword	Value
TEST	SP-00618_1_M-12L
TESTLAB	VLS-245-981
MANUFAC	Spectrum Lighting
ISSUEDATE	10/16/2017
UPDATE	3/9/2020
LUMCAT	GL04IND48LX 12L 35K EX DW XX MW
LUMINAIRE	Milltown Light 5.1" Wide x 48" linear pendant or surface mount luminaire
OTHER	48" Linear LED, Diffuse White Acrylic Lens
OTHER	Matte White interior finish
OTHER	112 Degree Beam Angle
LAMPCAT	N/A
LAMP	N/A, 1280 Source Lm/Ft
OTHER	Total Luminaire Watts is approximate
OTHER	CCT Output Multipliers: 30K x 0.98, 35K x 1.0, 40K x 1.03, 50K x 1.06
OTHER	This report prepared by Spectrum Lighting, scaled from 20L

Candela Polar Plot

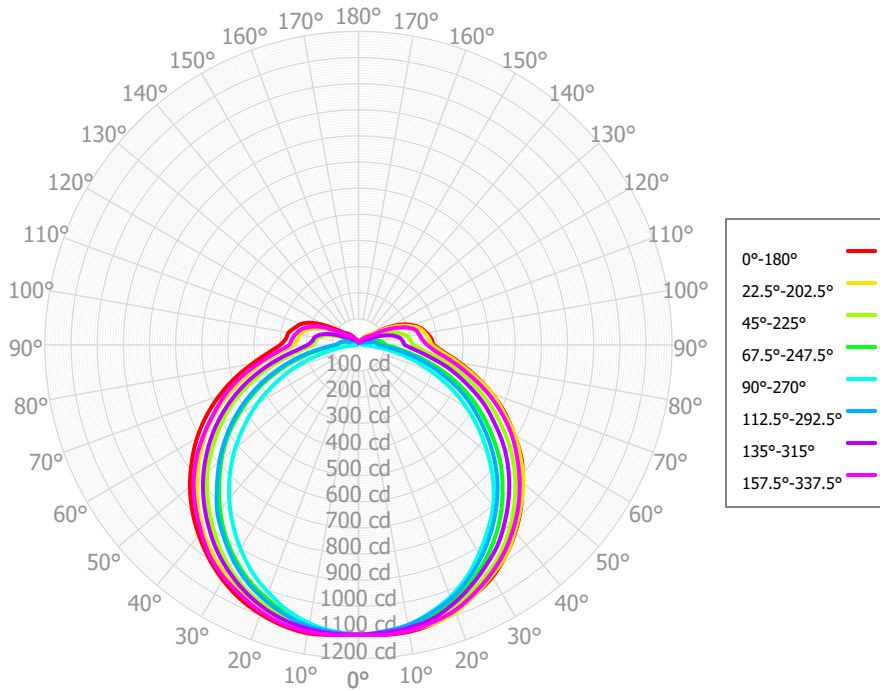

Zonal Lumen Summary

Zone	Lumens	% Fixture	Zone	Lumens	% Fixture
0.00° - 10.00°	111.94	2.57%	90.00° - 100.00°	178.64	4.09%
10.00° - 20.00°	305.60	7.00%	100.00° - 110.00°	144.81	3.32%
20.00° - 30.00°	471.29	10.80%	100.00° - 120.00°	236.88	5.43%
30.00° - 40.00°	583.10	13.36%	120.00° - 130.00°	45.27	1.04%
40.00° - 50.00°	628.78	14.41%	130.00° - 140.00°	25.16	0.58%
50.00° - 60.00°	606.38	13.90%	140.00° - 150.00°	14.01	0.32%
60.00° - 70.00°	519.88	11.91%	150.00° - 160.00°	7.38	0.17%
70.00° - 80.00°	382.63	8.77%	160.00° - 170.00°	3.61	0.08%
80.00° - 90.00°	241.68	5.54%	170.00° - 180.00°	1.04	0.02%
0.00° - 90.00°	3,851.29	88.27%	0.00° - 180.00°	4,363.28	100.00%

Candela Distribution

	0.00°	22.50°	45.00°	67.50°	90.00°	112.50°	135.00°	157.50°	180.00°	202.50°	225.00°	247.50°	270.00°	292.50°	315.00°	337.50°	360.00°
0.00°	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99	1,108.99
5.00°	1,113.75	1,110.26	1,106.22	1,106.66	1,104.52	1,102.37	1,109.04	1,113.38	1,114.06	1,110.20	1,106.58	1,104.69	1,100.49	1,100.39	1,104.94	1,113.73	1,113.75
10.00°	1,114.47	1,108.21	1,103.14	1,095.61	1,089.31	1,092.38	1,102.76	1,114.36	1,120.41	1,109.49	1,099.19	1,087.41	1,081.46	1,088.23	1,099.34	1,110.88	1,114.47
15.00°	1,104.58	1,104.05	1,090.29	1,071.93	1,060.32	1,070.70	1,090.48	1,106.89	1,112.55	1,098.08	1,081.03	1,065.77	1,050.77	1,064.46	1,085.60	1,098.73	1,104.58
20.00°	1,082.25	1,087.93	1,065.44	1,043.75	1,026.14	1,040.89	1,068.63	1,087.64	1,095.74	1,083.89	1,058.26	1,031.03	1,008.22	1,033.62	1,056.00	1,080.58	1,082.25
25.00°	1,054.43	1,054.59	1,034.73	1,007.25	979.63	1,003.18	1,036.56	1,059.43	1,072.00	1,049.87	1,028.24	993.47	960.61	990.80	1,017.99	1,048.80	1,054.43
30.00°	1,025.65	1,020.20	1,000.23	960.57	922.59	955.17	997.18	1,028.32	1,038.52	1,016.10	985.30	945.08	902.23	938.69	975.44	1,012.50	1,025.65
35.00°	983.14	983.24	957.73	907.11	862.86	898.35	950.68	989.49	997.51	973.87	933.83	888.82	838.18	880.76	931.00	971.01	983.14
40.00°	934.46	931.47	904.23	846.81	801.95	839.81	895.86	936.05	950.56	925.43	876.90	824.70	769.76	818.75	873.90	920.91	934.46
45.00°	879.76	877.83	845.04	779.66	728.28	766.02	838.19	881.71	899.42	868.86	818.09	753.50	696.00	752.50	814.02	865.87	879.76
50.00°	818.65	824.03	782.45	710.43	645.24	694.87	775.03	823.96	841.86	804.86	754.89	685.48	615.77	677.96	749.58	804.05	818.65
55.00°	762.51	758.20	713.39	631.39	562.44	620.69	706.27	757.26	779.13	741.59	681.97	611.81	531.14	599.14	679.91	739.85	762.51
60.00°	689.73	690.62	637.88	553.00	477.90	542.58	633.67	683.13	713.98	674.27	608.44	529.44	446.23	520.48	602.19	674.33	689.73
65.00°	619.11	614.12	561.67	472.88	389.62	460.11	555.52	607.76	642.48	600.12	533.46	447.01	356.02	440.25	528.36	599.58	619.11
70.00°	544.41	544.57	482.30	386.78	296.98	374.72	475.01	538.71	566.60	519.64	447.14	359.29	267.65	353.29	443.79	520.84	544.41
75.00°	465.66	460.78	401.99	298.23	210.67	288.35	391.58	462.29	489.40	438.70	366.05	273.00	173.41	269.32	365.31	437.81	465.66
80.00°	393.31	385.91	322.35	212.43	123.66	207.97	310.46	381.69	412.12	367.38	284.93	191.56	93.29	190.49	282.68	363.75	393.31
85.00°	330.02	323.09	250.75	147.70	52.03	136.12	239.17	313.35	346.64	297.51	218.48	123.33	32.80	119.08	217.98	298.42	330.02
90.00°	289.16	282.37	210.88	104.37	18.74	89.20	194.95	265.61	299.61	247.98	174.81	82.84	6.39	79.64	177.62	263.06	289.16
95.00°	279.73	270.86	199.90	95.40	13.33	76.67	177.37	255.59	279.12	233.50	165.53	71.62	6.30	71.11	169.96	244.84	279.73
100.00°	265.16	258.98	191.30	86.38	14.65	68.48	170.43	243.75	271.84	226.77	159.46	60.43	4.32	60.38	159.90	235.28	265.16
105.00°	247.74	242.72	168.27	62.01	11.20	51.31	151.91	227.96	252.79	212.46	138.28	32.91	3.99	37.09	137.91	225.27	247.74
110.00°	221.10	211.58	142.28	40.36	14.96	36.73	122.65	202.28	234.76	183.46	105.96	20.72	4.55	25.58	106.61	195.77	221.10
115.00°	186.00	172.71	100.72	35.07	14.25	32.74	87.87	165.77	201.63	150.41	67.21	19.34	5.21	22.58	71.16	153.31	186.00
120.00°	137.81	128.22	62.20	31.51	15.16	29.32	55.54	118.49	151.51	101.45	40.86	16.12	5.96	17.47	45.50	110.80	137.81
125.00°	89.84	86.87	53.82	28.32	12.42	26.39	49.54	80.75	102.53	61.50	34.07	13.00	6.43	14.00	38.10	67.74	89.84
130.00°	58.54	65.65	46.46	23.29	11.66	24.41	42.43	65.41	74.29	51.77	30.90	13.03	5.62	10.19	29.26	52.91	58.54
135.00°	50.13	58.54	37.95	20.61	12.82	21.97	30.27	55.00	63.66	44.14	24.62	13.11	5.05	10.50	23.30	43.44	50.13
140.00°	43.52	46.73	34.05	19.45	11.38	18.83	27.64	43.91	53.95	33.29	18.65	9.75	7.06	9.94	17.35	34.72	43.52
145.00°	33.33	33.46	23.45	14.64	11.81	16.82	24.14	36.32	43.24	23.83	14.54	10.46	6.87	9.70	15.08	27.91	33.33
150.00°	24.38	25.81	21.33	13.72	10.90	15.29	22.63	29.77	31.46	20.91	13.30	9.26	5.61	8.51	14.82	21.73	24.38
155.00°	19.17	23.23	17.72	14.38	9.84	12.96	18.14	23.78	25.09	17.04	12.67	9.10	6.10	7.05	13.51	16.93	19.17
160.00°	16.14	20.53	17.07	11.30	10.36	12.72	17.05	19.90	22.98	16.80	10.76	8.42	6.98	8.65	12.36	14.87	16.14
165.00°	16.15	14.07	13.98	12.27	9.86	9.68	13.76	16.27	20.07	12.61	11.55	8.24	6.26	9.00	11.36	12.87	16.15
170.00°	12.14	12.32	10.98	10.53	8.61	10.16	11.75	13.55	19.18	12.14	8.93	9.95	8.93	7.69	10.16	10.64	12.14
175.00°	10.46	9.80	9.62	8.62	8.13	9.20	9.51	10.80	11.30	9.89	10.01	8.44	8.60	7.19	8.94	11.52	10.46
180.00°	9.60	9.60	9.60	9.60	9.60	9.60	9.60	9.60	9.60	9.60	9.60	9.60	9.60	9.60	9.60	9.60	9.60

Coefficients of Utilization – Zonal Cavity Method

Values are lumens delivered to the workplane.

RCR	pfc	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	0%	
	pcc	80%	80%	80%	80%	70%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	10%	0%
	pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	30%
	0	5,072	5,072	5,072	5,072	4,895	4,895	4,895	4,895	4,564	4,564	4,564	4,261	4,261	4,261	3,982	3,982	3,982	3,851
	1	4,538	4,294	4,075	3,878	4,363	4,143	3,945	3,766	3,861	3,700	3,552	3,601	3,472	3,352	3,362	3,260	3,164	3,144
	2	4,091	3,692	3,364	3,087	3,923	3,564	3,264	3,010	3,323	3,075	2,861	3,101	2,897	2,719	2,895	2,730	2,583	2,630
	3	3,709	3,214	2,831	2,526	3,552	3,104	2,753	2,470	2,898	2,603	2,360	2,708	2,461	2,254	2,531	2,327	2,151	2,240
	4	3,382	2,829	2,424	2,114	3,238	2,735	2,361	2,071	2,559	2,240	1,987	2,395	2,124	1,905	2,242	2,014	1,825	1,939
	5	3,101	2,515	2,105	1,803	2,970	2,434	2,053	1,769	2,282	1,954	1,702	2,141	1,858	1,637	2,008	1,767	1,573	1,702
	6	2,857	2,255	1,850	1,560	2,738	2,185	1,807	1,533	2,054	1,724	1,479	1,931	1,644	1,425	1,816	1,567	1,373	1,511
	7	2,644	2,037	1,643	1,368	2,536	1,977	1,607	1,345	1,862	1,537	1,300	1,755	1,469	1,256	1,654	1,404	1,212	1,355
	8	2,457	1,853	1,473	1,212	2,359	1,800	1,442	1,193	1,700	1,382	1,155	1,606	1,324	1,118	1,517	1,268	1,081	1,225
	9	2,293	1,696	1,331	1,084	2,203	1,650	1,304	1,068	1,562	1,252	1,036	1,478	1,202	1,004	1,400	1,154	973	1,116
	10	2,147	1,561	1,211	977	2,065	1,520	1,188	963	1,442	1,142	936	1,368	1,099	908	1,298	1,056	881	1,023

Cone of Light

Mtg Height	Light Level	Beam Diameter
5.5 ft	36.7 fc	22.2 ft
6.5 ft	26.2 fc	26.2 ft
7.5 ft	19.7 fc	30.2 ft
8.0 ft	17.3 fc	32.3 ft
10.0 ft	11.1 fc	40.3 ft
12.0 ft	7.7 fc	48.4 ft
14.0 ft	5.7 fc	56.5 ft
16.0 ft	4.3 fc	64.5 ft
20.0 ft	2.8 fc	80.7 ft
24.0 ft	1.9 fc	96.8 ft
28.0 ft	1.4 fc	112.9 ft

Average Luminaire Luminance [cd/m²]

	0.00°	45.00°	90.00°
0.00°	6,906	6,906	6,906
45.00°	5,552	5,683	6,153
55.00°	5,291	5,371	5,758
65.00°	4,937	4,974	5,263
75.00°	4,526	4,488	4,378
85.00°	4,272	3,949	2,506

UGR CIE 190:2010

Ceiling reflectance		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall reflectance		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Plane reflectance		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
2H	2H	18.2	19.7	18.8	20.2	20.8	15.7	17.1	16.2	17.7	18.3
	3H	20.7	22.1	21.3	22.6	23.2	17.2	18.5	17.7	19.1	19.7
	4H	21.9	23.2	22.5	23.7	24.4	17.7	18.9	18.2	19.5	20.1
	6H	23.1	24.3	23.7	24.8	25.5	17.9	19.1	18.5	19.7	20.3
	8H	23.7	24.8	24.3	25.4	26.1	18.0	19.1	18.6	19.7	20.4
	12H	24.3	25.4	24.9	26.0	26.7	18.0	19.1	18.6	19.7	20.4
4H	2H	18.7	19.9	19.3	20.5	21.2	16.7	18.0	17.3	18.6	19.2
	3H	21.4	22.5	22.0	23.1	23.7	18.5	19.6	19.1	20.2	20.8
	4H	22.7	23.7	23.3	24.3	25.0	19.1	20.1	19.7	20.7	21.4
	6H	24.1	25.0	24.7	25.6	26.3	19.5	20.4	20.1	21.0	21.7
	8H	24.8	25.6	25.4	26.3	27.0	19.6	20.4	20.2	21.0	21.8
	12H	25.6	26.3	26.2	27.0	27.7	19.6	20.4	20.3	21.0	21.8
8H	4H	23.0	23.8	23.6	24.4	25.1	19.8	20.7	20.5	21.3	22.0
	6H	24.5	25.2	25.1	25.9	26.6	20.4	21.1	21.1	21.8	22.5
	8H	25.3	26.0	26.0	26.6	27.4	20.6	21.3	21.3	21.9	22.7
	12H	26.3	26.8	26.9	27.5	28.3	20.8	21.3	21.4	22.0	22.8
12H	4H	23.0	23.7	23.6	24.4	25.1	20.0	20.8	20.7	21.4	22.2
	6H	24.5	25.2	25.2	25.8	26.6	20.7	21.4	21.4	22.0	22.8
	8H	25.4	26.0	26.1	26.7	27.5	21.0	21.6	21.7	22.3	23.1

Corrected UGR values based on total output lumens

SHR = 1.0