

Indoor Distribution Test Report

Spectrum Lighting Inc.

994 Jefferson Street
Fall River, MA 02721
+1.508.678.2303

Spectrum Lighting Photometric Lab

Luminaire

GL04IND48LX 20L 35K EX DW XX MW

Milltown Light 5.1" Wide x 48" linear pendant or surface mount luminaire

Test Number

SP-00618_1

Test Date

The results contained in this report pertain only to this IES file.

Summary of Results

Power

Input Watts	60.1 W
-------------	--------

Lumen Output

Output Lumens	6818
Efficacy	113.44 lm/W

Luminous Dimensions

0° - 180° Size	0.43
90° - 270° Size	4.02
Height	0.17

Spacing Criterion

Two luminaires, plane 0°	1.36
Two luminaires, plane 90°	1.23
Four luminaires	1.45


Full Beam Angle

0° - 180°	139°
90° - 270°	108°

IES File Header Contents

Keyword	Value
TEST	SP-00618_1
TESTLAB	VLS-245-981
MANUFAC	Spectrum Lighting
ISSUEDATE	10/16/2017
UPDATE	3/9/2020
LUMCAT	GL04IND48LX 20L 35K EX DW XX MW
LUMINAIRE	Milltown Light 5.1" Wide x 48" linear pendant or surface mount luminaire
OTHER	48" Linear LED, Diffuse White Acrylic Lens
OTHER	Matte White interior finish
OTHER	112 Degree Beam Angle
LAMPCAT	N/A
LAMP	N/A, 2000 Source Lms/Ft
OTHER	Total Luminaire Watts is approximate
OTHER	CCT Output Multipliers: 30K x 0.98, 35K x 1.0, 40K x 1.03, 50K x 1.06
OTHER	This report prepared by Spectrum Lighting
_CRI	80+
_CCTMULT	30K x 0.98, 35K x 1.0, 40K x 1.03, 50K x 1.06
_LAMPMULT	5L x 0.28, 7L x 0.35, 12L x 0.64, 15L x 0.78

Candela Polar Plot

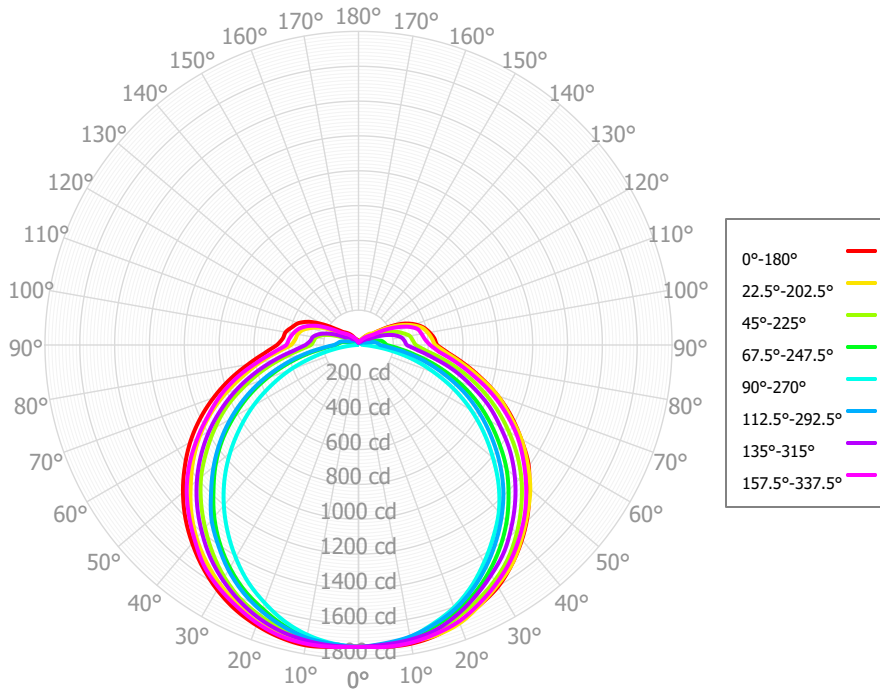

Zonal Lumen Summary

Zone	Lumens	% Fixture	Zone	Lumens	% Fixture
0.00° - 10.00°	174.91	2.57%	90.00° - 100.00°	279.13	4.09%
10.00° - 20.00°	477.49	7.00%	100.00° - 110.00°	226.27	3.32%
20.00° - 30.00°	736.40	10.80%	100.00° - 120.00°	370.12	5.43%
30.00° - 40.00°	911.10	13.36%	120.00° - 130.00°	70.73	1.04%
40.00° - 50.00°	982.47	14.41%	130.00° - 140.00°	39.32	0.58%
50.00° - 60.00°	947.47	13.90%	140.00° - 150.00°	21.88	0.32%
60.00° - 70.00°	812.31	11.91%	150.00° - 160.00°	11.53	0.17%
70.00° - 80.00°	597.86	8.77%	160.00° - 170.00°	5.65	0.08%
80.00° - 90.00°	377.63	5.54%	170.00° - 180.00°	1.62	0.02%
0.00° - 90.00°	6,017.64	88.27%	0.00° - 180.00°	6,817.63	100.00%

Candela Distribution

	0.00°	22.50°	45.00°	67.50°	90.00°	112.50°	135.00°	157.50°	180.00°	202.50°	225.00°	247.50°	270.00°	292.50°	315.00°	337.50°	360.00°
0.00°	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80	1,732.80
5.00°	1,740.24	1,734.79	1,728.47	1,729.15	1,725.82	1,722.45	1,732.88	1,739.66	1,740.72	1,734.69	1,729.03	1,726.07	1,719.51	1,719.36	1,726.47	1,740.20	1,740.24
10.00°	1,741.36	1,731.58	1,723.65	1,711.89	1,702.05	1,706.84	1,723.06	1,741.19	1,750.64	1,733.57	1,717.49	1,699.08	1,689.78	1,700.35	1,717.71	1,735.74	1,741.36
15.00°	1,725.91	1,725.08	1,703.58	1,674.88	1,656.75	1,672.96	1,703.88	1,729.51	1,738.37	1,715.75	1,689.11	1,665.26	1,641.83	1,663.22	1,696.26	1,716.76	1,725.91
20.00°	1,691.02	1,699.89	1,664.74	1,630.86	1,603.34	1,626.38	1,669.73	1,699.44	1,712.09	1,693.58	1,653.54	1,610.99	1,575.34	1,615.03	1,650.01	1,688.41	1,691.02
25.00°	1,647.54	1,647.79	1,616.76	1,573.83	1,530.68	1,567.46	1,619.63	1,655.36	1,674.99	1,640.42	1,606.63	1,552.30	1,500.95	1,548.13	1,590.60	1,638.75	1,647.54
30.00°	1,602.57	1,594.06	1,562.87	1,500.89	1,441.55	1,492.46	1,558.10	1,606.75	1,622.69	1,587.66	1,539.53	1,476.69	1,409.74	1,466.70	1,524.13	1,582.02	1,602.57
35.00°	1,536.15	1,536.32	1,496.45	1,417.36	1,348.21	1,403.68	1,485.44	1,546.08	1,558.61	1,521.68	1,459.11	1,388.78	1,309.66	1,376.19	1,454.68	1,517.21	1,536.15
40.00°	1,460.09	1,455.43	1,412.86	1,323.14	1,253.05	1,312.21	1,399.78	1,462.58	1,485.25	1,445.99	1,370.15	1,288.60	1,202.75	1,279.30	1,365.47	1,438.93	1,460.09
45.00°	1,374.63	1,371.61	1,320.38	1,218.22	1,137.93	1,196.91	1,309.68	1,377.68	1,405.34	1,357.59	1,278.27	1,177.35	1,087.49	1,175.79	1,271.91	1,352.92	1,374.63
50.00°	1,279.14	1,287.55	1,222.58	1,110.05	1,008.19	1,085.74	1,210.98	1,287.44	1,315.41	1,257.59	1,179.51	1,071.06	962.14	1,059.31	1,171.21	1,256.33	1,279.14
55.00°	1,191.43	1,184.69	1,114.67	986.55	878.81	969.83	1,103.55	1,183.21	1,217.39	1,158.74	1,065.58	955.96	829.91	936.15	1,062.35	1,156.02	1,191.43
60.00°	1,077.70	1,079.09	996.69	864.07	746.72	847.78	990.10	1,067.40	1,115.59	1,053.55	950.68	827.25	697.23	813.26	940.92	1,053.64	1,077.70
65.00°	967.36	959.57	877.60	738.88	608.78	718.92	868.00	949.63	1,003.88	937.69	833.54	698.46	556.29	687.89	825.56	936.84	967.36
70.00°	850.63	850.89	753.60	604.35	464.04	585.51	742.21	841.73	885.32	811.94	698.66	561.39	418.21	552.02	693.42	813.81	850.63
75.00°	727.60	719.97	628.10	465.98	329.17	450.55	611.85	722.33	764.68	685.47	571.95	426.57	270.95	420.82	570.79	684.09	727.60
80.00°	614.55	602.99	503.67	331.92	193.22	324.96	485.09	596.39	643.94	574.03	445.21	299.32	145.76	297.64	441.69	568.37	614.55
85.00°	515.65	504.83	391.80	230.79	81.30	212.69	373.70	489.61	541.63	464.86	341.38	192.70	51.25	186.07	340.59	466.28	515.65
90.00°	451.81	441.20	329.50	163.07	29.28	139.37	304.61	415.01	468.14	387.47	273.15	129.44	9.99	124.43	277.54	411.03	451.81
95.00°	437.08	423.21	312.34	149.07	20.83	119.80	277.14	399.36	436.13	364.85	258.64	111.91	9.85	111.12	265.57	382.56	437.08
100.00°	414.32	404.65	298.91	134.97	22.89	107.00	266.29	380.86	424.75	354.33	249.16	94.42	6.76	94.35	249.84	367.63	414.32
105.00°	387.10	379.25	262.93	96.89	17.49	80.17	237.36	356.18	394.99	331.98	216.06	51.42	6.24	57.95	215.49	351.98	387.10
110.00°	345.48	330.59	222.32	63.06	23.37	57.39	191.64	316.07	366.81	286.65	165.57	32.37	7.10	39.97	166.58	305.89	345.48
115.00°	290.63	269.86	157.38	54.80	22.27	51.16	137.30	259.01	315.05	235.01	105.02	30.23	8.14	35.28	111.19	239.55	290.63
120.00°	215.32	200.35	97.19	49.23	23.69	45.81	86.79	185.14	236.73	158.51	63.84	25.18	9.31	27.30	71.10	173.13	215.32
125.00°	140.38	135.74	84.09	44.25	19.40	41.24	77.40	126.17	160.20	96.10	53.24	20.32	10.04	21.88	59.53	105.85	140.38
130.00°	91.47	102.58	72.60	36.38	18.22	38.14	66.30	102.21	116.08	80.88	48.28	20.35	8.79	15.93	45.71	82.68	91.47
135.00°	78.33	91.47	59.29	32.20	20.03	34.32	47.30	85.93	99.47	68.97	38.47	20.49	7.89	16.41	36.40	67.88	78.33
140.00°	68.01	73.01	53.20	30.39	17.77	29.42	43.19	68.62	84.30	52.02	29.13	15.24	11.04	15.53	27.11	54.24	68.01
145.00°	52.08	52.27	36.64	22.87	18.45	26.28	37.73	56.75	67.56	37.23	22.72	16.34	10.73	15.15	23.56	43.61	52.08
150.00°	38.09	40.33	33.33	21.44	17.04	23.89	35.37	46.52	49.16	32.67	20.79	14.47	8.76	13.29	23.15	33.95	38.09
155.00°	29.96	36.29	27.69	22.47	15.38	20.25	28.34	37.16	39.21	26.63	19.80	14.22	9.53	11.01	21.11	26.45	29.96
160.00°	25.22	32.08	26.67	17.66	16.18	19.88	26.64	31.09	35.91	26.24	16.82	13.15	10.90	13.52	19.31	23.23	25.22
165.00°	25.23	21.98	21.84	19.17	15.40	15.13	21.50	25.42	31.36	19.70	18.05	12.87	9.79	14.07	17.74	20.10	25.23
170.00°	18.97	19.25	17.16	16.45	13.45	15.88	18.36	21.18	29.98	18.96	13.96	15.54	13.96	12.01	15.88	16.62	18.97
175.00°	16.34	15.31	15.04	13.46	12.70	14.37	14.86	16.87	17.66	15.46	15.63	13.19	13.43	11.23	13.96	18.00	16.34
180.00°	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00

Coefficients of Utilization – Zonal Cavity Method

Values are lumens delivered to the workplane.

	pfc	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	0%
	pcc	80%	80%	80%	80%	70%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	0%
	pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	30%
RCR	0	7,926	7,926	7,926	7,926	7,648	7,648	7,648	7,648	7,131	7,131	7,131	6,657	6,657	6,657	6,222	6,222	6,018
	1	7,091	6,710	6,367	6,059	6,817	6,474	6,165	5,884	6,032	5,781	5,551	5,627	5,425	5,238	5,253	5,093	4,944
	2	6,391	5,769	5,255	4,824	6,130	5,569	5,100	4,703	5,193	4,805	4,470	4,845	4,527	4,248	4,524	4,266	4,036
	3	5,795	5,021	4,423	3,947	5,551	4,851	4,301	3,859	4,529	4,067	3,687	4,231	3,845	3,521	3,955	3,635	3,362
	4	5,285	4,420	3,787	3,304	5,060	4,274	3,689	3,236	3,998	3,499	3,105	3,742	3,319	2,976	3,503	3,147	2,852
	5	4,845	3,929	3,289	2,817	4,640	3,804	3,209	2,764	3,566	3,053	2,659	3,345	2,903	2,557	3,138	2,761	2,457
	6	4,464	3,523	2,891	2,438	4,278	3,415	2,824	2,395	3,209	2,694	2,310	3,017	2,569	2,227	2,837	2,449	2,145
	7	4,131	3,183	2,568	2,137	3,962	3,089	2,511	2,101	2,910	2,402	2,031	2,742	2,296	1,962	2,585	2,194	1,894
	8	3,840	2,895	2,301	1,893	3,686	2,813	2,253	1,864	2,657	2,159	1,805	2,509	2,069	1,747	2,371	1,981	1,689
	9	3,582	2,650	2,079	1,693	3,443	2,578	2,038	1,668	2,440	1,957	1,618	2,310	1,878	1,568	2,188	1,802	1,520
	10	3,354	2,439	1,892	1,527	3,227	2,375	1,856	1,505	2,253	1,785	1,462	2,138	1,717	1,419	2,029	1,650	1,377

Cone of Light

Mtg Height	Light Level	Beam Diameter
5.5 ft	57.3 fc	22.2 ft
6.5 ft	41.0 fc	26.2 ft
7.5 ft	30.8 fc	30.2 ft
8.0 ft	27.1 fc	32.3 ft
10.0 ft	17.3 fc	40.3 ft
12.0 ft	12.0 fc	48.4 ft
14.0 ft	8.8 fc	56.5 ft
16.0 ft	6.8 fc	64.5 ft
20.0 ft	4.3 fc	80.7 ft
24.0 ft	3.0 fc	96.8 ft
28.0 ft	2.2 fc	112.9 ft

Average Luminaire Luminance [cd/m²]

	0.00°	45.00°	90.00°
0.00°	10,790	10,790	10,790
45.00°	8,675	8,880	9,614
55.00°	8,267	8,392	8,997
65.00°	7,714	7,773	8,224
75.00°	7,072	7,013	6,840
85.00°	6,676	6,170	3,916

UGR CIE 190:2010

Ceiling reflectance		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall reflectance		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Plane reflectance		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
2H	2H	19.8	21.3	20.3	21.8	22.4	17.2	18.7	17.8	19.2	19.8
	3H	22.3	23.6	22.8	24.2	24.8	18.7	20.1	19.3	20.6	21.2
	4H	23.5	24.7	24.0	25.3	25.9	19.2	20.5	19.8	21.0	21.7
	6H	24.6	25.8	25.2	26.4	27.1	19.5	20.7	20.1	21.2	21.9
	8H	25.2	26.4	25.8	27.0	27.6	19.5	20.7	20.1	21.3	21.9
	12H	25.9	27.0	26.5	27.6	28.3	19.5	20.6	20.1	21.2	21.9
4H	2H	20.2	21.5	20.8	22.1	22.7	18.3	19.5	18.8	20.1	20.7
	3H	23.0	24.0	23.5	24.6	25.3	20.0	21.1	20.6	21.7	22.4
	4H	24.3	25.3	24.9	25.9	26.6	20.6	21.6	21.2	22.2	22.9
	6H	25.7	26.5	26.3	27.2	27.9	21.0	21.9	21.7	22.6	23.3
	8H	26.4	27.2	27.0	27.8	28.5	21.1	22.0	21.8	22.6	23.3
	12H	27.1	27.9	27.8	28.5	29.3	21.2	21.9	21.8	22.6	23.3
8H	4H	24.5	25.3	25.1	26.0	26.7	21.4	22.2	22.0	22.8	23.6
	6H	26.0	26.7	26.7	27.4	28.1	22.0	22.7	22.6	23.4	24.1
	8H	26.9	27.5	27.5	28.2	28.9	22.2	22.8	22.8	23.5	24.2
	12H	27.8	28.4	28.5	29.1	29.9	22.3	22.9	23.0	23.5	24.3
12H	4H	24.5	25.3	25.2	25.9	26.6	21.6	22.3	22.2	23.0	23.7
	6H	26.1	26.7	26.8	27.4	28.1	22.3	22.9	23.0	23.6	24.4
	8H	27.0	27.5	27.7	28.2	29.0	22.6	23.1	23.2	23.8	24.6

Corrected UGR values based on total output lumens

SHR = 1.0