



**DIRECT**

# LED ATRIUM FIXTURE

## OA SERIES / 3x52 WATT MAX LED

speculume decorative



### ATL40X3LEDOA

#### APPLICATION

LED atrium fixture designed for 20' + mounting heights. Fixture adjustment allows for use as down, side or indirect area light.

#### FEATURES

Three individual heads may be aimed for indirect (up), horizontal (side) or down lighting (down). Delivers a range of 9000-18000 lumens. Unique triangle of fabricated aluminum is decorative and functional providing a rigid mounting platform. Variety of finishes and mounting methods.

#### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

#### ELECTRONICS


LED module features high brightness white Nichia LEDs. 3-step MacAdam Ellipses binning and CRI 84 minimum. Variety of electronic 120v/277v and dimming drivers.

#### CONSTRUCTION


Extruded and machined 6063-H32 aluminum heatsink and fixture housing. Fixture frame constructed of aluminum extrusion and finished to specification.

#### CODE COMPLIANCE

ARRA Compliant. ETL/UL/CSA listed for damp locations. LM79/LM80/TM21 data available. Manufactured and tested to UL standards No. 1598/8750.

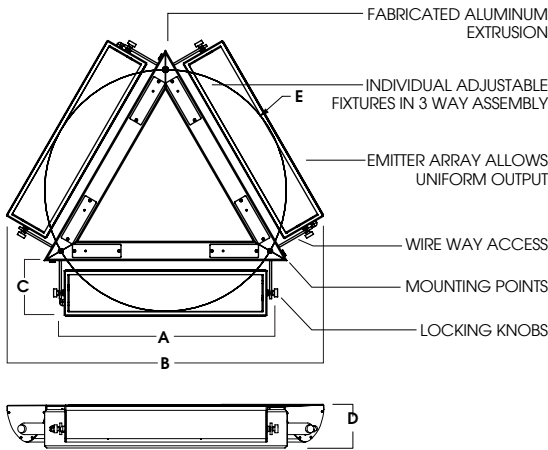

A	B	C	D	E
26.4	39.1	7.0	5.5	Ø29.3
670.5mm	993.1 mm	177.8 mm	137.7 mm	744.2mm

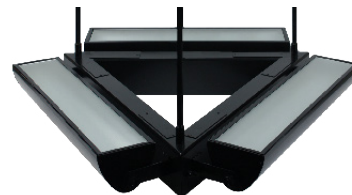

**INDIRECT**



**ADJUSTABLE**

SERIES	LED	KELVIN	DRIVER	ADAPTOR	FINISH	ACCESSORIES
ATL40X3	LEDOA26W 3X26W 9000 Lumens*	30K-3000° K 35K-3500° K 40K-4000° K	E1-Electronic, 120v E2-Electronic, 277v DS101-Spectrum 0-10v Dimming, 120v to 10% DS102-Spectrum 0-10v Dimming, 277v to 10%	PMX3*-Rigid Pendant (3/8 IPS) 3XStem CDX3-Hang Straight Pendant 3XStem HMx3-Hang Straight SCI-Safety Cable	MW-Matte White MB-Matte Black GW-Gloss White GB-Gloss Black BZ-Bronze OB-Oil Rubbed Bronze PT-Platinum SI-Silver GA-Galvanized BA-Brushed Aluminum CH-Charcoal GH-Graphite AM-Anodic Malachite SN-Sun Gold BL-Blue Streak RD-Red Baron CO-Copper Metallic CC-Custom Color	SO-Micro Prism Solite™ Lens Standard GL-Clear Glass FG-Frosted Glass FO90-White Optical Acrylic
	LEDOA52W 3X52W 18000 Lumens*		No Dimming Available	*Specify Length in Inches	See SPECTRUM Color Chart for a Full List of Colors	

### EXAMPLE: ATL40X3LEDOA52W30KE2/PMX336MW SO

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



<b>PROJECT:</b>	<b>TYPE:</b>
<b>CAT. NO.:</b>	

