


8" ROUND LENS DOWNLIGHT

PROJECT: _____
 QUANTITY: _____ TYPE: _____

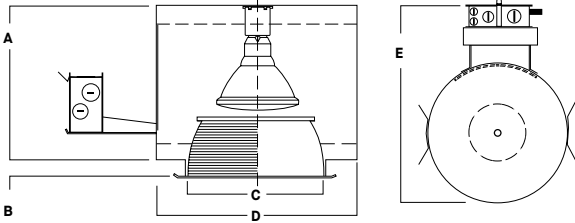

A	B	C	D	E
8.5 215.9 mm	0.6 15.8 mm	7.0 177.8 mm	11.5 292.1 mm	16.0 406.4 mm

SGG8IN

APPLICATION

Series features a deep reflector for excellent cutoff.

FEATURES

Efficient reflector design optimized for PAR30/PAR38 LED lamps (Sold by others). Integral 5/8" (0.625") plaster ring. Tool-less access for ease of maintenance. Multi-bar adjustable mounting brackets.

TRIM FINISH

Variety of powdercoat and anodized finishes available on trim.

ELECTRONICS

120V Electronic transformer is standard.

CONSTRUCTION

Frame constructed of 20 ga. aluminum. Trim spun from .063" high purity aluminum and finished to specification.

CODE COMPLIANCE

ETL listed for damp location. Wet location available. Manufactured and tested to UL Standard No. 1598.

PRODUCT SELECTOR GUIDE

SERIES	OPTIONS	BAR HANGERS	TRIM	FINISH	FLANGE FINISH	LENS
SGG8IN			AR8450			

EXAMPLE

SGG8IN		BH27	AR8450	SG	MF	SO
--------	--	------	--------	----	----	----

HOUSING

MOUNTING OPTIONS

TRIM OPTIONS

SERIES	OPTIONS	BAR HANGERS	TRIM	FINISH	FLANGE FINISH	LENS
SGG8IN	CR Corrosion Resistant TR Top Relamping Option	BH27 27" Solid Bars	AR8450	SG Semi-Diffuse	MF Matching Flange WF White Flange For Use with Non-White Trim Finish	GL Clear Glass Lens
		H12 12" - 24" Expandable Bars		MW Matte White		SO Micro Prism Solite™ Lens
		CB24 24" C-Channel Bars		MB Matte Black		NL No Lens

