



1' x 4' CENTER BASKET
DAMP LOCATION
 TROFFER LUME / 3750 LUMENS

PROJECT: _____
 TYPE: _____



SERIES	LUMENS ¹		CCT		DRIVER / VOLTAGE	
CB1248 No Sensor	37L	3750 Lm	35K	3500K	DX	1%, 0-10V, 120V/277V
CS1248 With Sensor			40K	4000K		

EXAMPLE: CB124837L35KDX

NOTES:
 1 Nominal Delivered Lumens at 35K



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.






1' x 4' CENTER BASKET
DAMP LOCATION
 TROFFER LUME / 3750 LUMENS

LUMENS / WATTAGE DATA			
PART NUMBER	DELIVERED LUMENS ¹	SYSTEM WATTS	LPW
CB124837L	3750	30	125

¹ Nominal Source Lumens at 35K

HOUSING DIMENSIONS

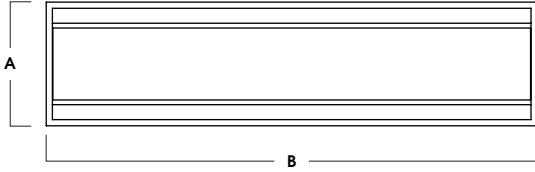

A	B	C
12.0 304.8 mm	47.8 1214.1 mm	3.95 100.3 mm

APPLICATION

Architectural recessed LED for general illumination. This is an immediate product category. 5 days is typical.

FEATURES

Designed for recessed grid ceiling installation. Produces even glare free illumination. Shallow plenum design, under 4".

ELECTRONICS

LED system features high brightness white LED's. 3-step MacAdam Ellipse binning. Standard CRI: 83 typical. 0-10V 10% 120V/277V dimming driver standard. Optional integral motion and day light sensor.

CONSTRUCTION

Housing constructed of powdercoat formed steel. Snap in extruded frosted acrylic diffuser. Lens is opal matte white acrylic. LED are placed for optimal lens uniformly.

CODE COMPLIANCE

Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

BOTTOM VIEW

