

**IES INDOOR REPORT****PHOTOMETRIC FILENAME : RDXX6XT-20LXXKXNE1-RD6XSGGLX.IES****DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002

[TESTLAB] Photopia 2015.1.1 see: www.ltioptics.com/ies

[ISSUE DATE]

[TEST DATE] Fri Aug 05 2016

[UPDATE] Thu Sep 29 2016

[TEST] SP-00476\_31

[MANUFAC] Spectrum Lighting

[[LUMCAT] RDxx6LEDXT-20L-xxK-XN-E1-RD6x-SG-GLX

[LUMINAIRE] 6" aperture, Xtra Narrow Beam

[TRIM] Semi-diffuse, regressed clear glass lens

[LAMP] N/A, 9mm, Min. 83 CRI

[LAMPCAT] N/A

[OTHER] Total Luminaire Watts is approximate

[OTHER] For Housings: RDFI6, RDFO6, RDZI6, and RDZO6 series

[OTHER] For Trims: RD6F and RD6N series with GLX or GLW

[OTHER] LEDXT lumen output is the same for all available color temperatures

[OTHER] This report prepared by Spectrum Lighting

**CHARACTERISTICS**

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1352
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	36
Total Luminaire Watts	37.5
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.20
Spacing Criterion (90-270)	0.22
Spacing Criterion (Diagonal)	0.22
Basic Luminous Shape	Point
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.00 ft
Luminous Height	0.00 ft

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : RDXX6XT-20LXXKXNE1-RD6XSGGLX.IES**

**LUMINANCE DATA (cd/sq.m)**

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	0	0	0
55	0	0	0
65	0	0	0
75	0	0	0
85	0	0	0

IES INDOOR REPORT  
 PHOTOMETRIC FILENAME : RDXX6XT-20LXXKXNE1-RD6XSGGLX.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
<b>0</b>	16125.61	16125.61	16125.61	16125.61	16125.61
<b>5</b>	9086.94	9125.39	9062.35	9218.16	9400.41
<b>10</b>	1456.13	1844.38	2242.05	1957.34	1647.67
<b>15</b>	676.14	672.65	696.74	692.23	655.36
<b>20</b>	555.52	547.75	556.23	553.64	552.56
<b>25</b>	500.19	495.84	504.63	497.78	495.68
<b>30</b>	429.11	428.07	427.07	429.36	425.78
<b>35</b>	275.07	281.65	288.64	284.26	288.24
<b>40</b>	41.51	44.13	48.21	46.01	41.09
<b>45</b>	5.75	6.13	6.12	5.96	5.26
<b>50</b>	2.31	2.12	2.18	2.17	2.19
<b>55</b>	0.76	0.81	0.57	0.76	0.80
<b>60</b>	0.28	0.25	0.18	0.13	0.20
<b>65</b>	0.05	0.03	0.10	0.06	0.11
<b>70</b>	0.03	0.02	0.07	0.03	0.08
<b>75</b>	0.01	0.02	0.04	0.00	0.03
<b>80</b>	0.00	0.03	0.01	0.02	0.00
<b>85</b>	0.02	0.01	0.00	0.00	0.00
<b>90</b>	0.00	0.00	0.00	0.00	0.00

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : RDXX6XT-20LXXKXNE1-RD6XSGGLX.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	952.86	N.A.	70.50
0-30	1180.51	N.A.	87.30
0-40	1340.24	N.A.	99.10
0-60	1352.14	N.A.	100.00
0-80	1352.26	N.A.	100.00
0-90	1352.27	N.A.	100.00
10-90	654.26	N.A.	48.40
20-40	387.39	N.A.	28.60
20-50	398.44	N.A.	29.50
40-70	11.99	N.A.	0.90
60-80	0.12	N.A.	0.00
70-80	0.03	N.A.	0.00
80-90	0.01	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1352.27	N.A.	100.00

Total Luminaire Efficiency = N.A. %

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	698.01
10-20	254.85
20-30	227.65
30-40	159.74
40-50	11.05
50-60	0.85
60-70	0.09
70-80	0.03
80-90	0.01
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : RDXX6XT-20LXXKXNE1-RD6XSGGLX.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	110	113	111	109	108	107	106	105	103	102	101	100	99	99	97
2	111	108	105	103	109	106	104	101	103	101	99	100	99	97	98	96	95	94
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	94	92	91
4	105	99	96	93	103	98	95	92	96	94	91	95	92	90	93	91	89	88
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	87	85
6	99	93	89	86	98	92	88	86	91	88	85	90	87	85	89	86	84	83
7	96	90	86	83	95	90	86	83	88	85	83	87	84	82	86	84	82	81
8	94	88	84	81	93	87	83	81	86	83	80	85	82	80	85	82	80	79
9	92	85	81	79	91	85	81	79	84	81	78	83	80	78	83	80	78	77
10	90	83	79	77	89	83	79	77	82	79	77	82	79	76	81	78	76	75

POLAR GRAPH

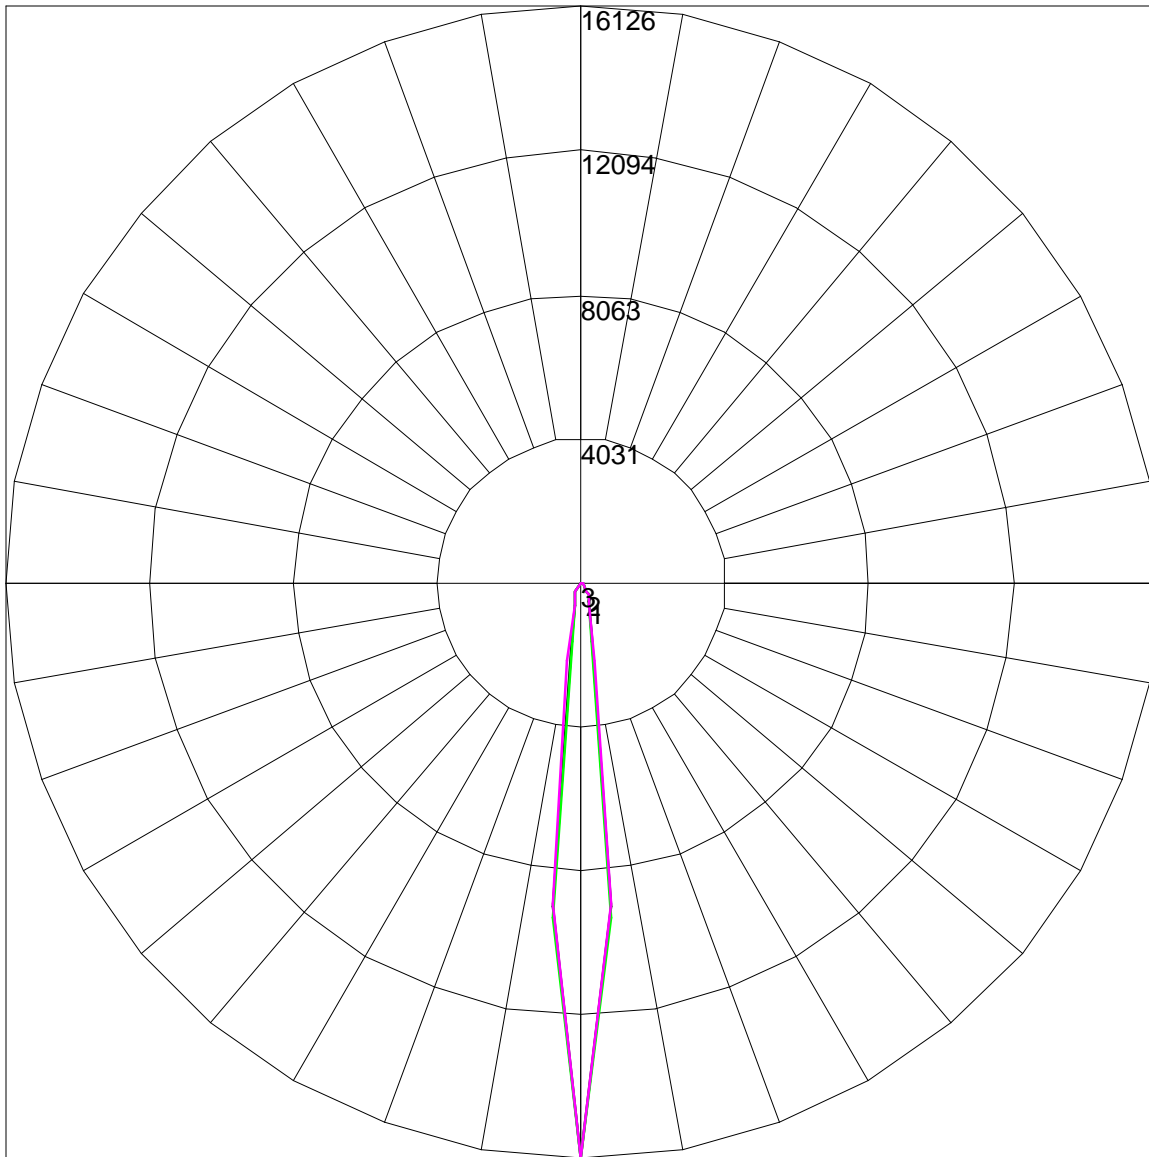

Maximum Candela = 16125.61 Located At Horizontal Angle = 0, Vertical Angle = 0

- # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
- # 2 - Vertical Plane Through Horizontal Angles (90 - 270)
- # 3 - Vertical Plane Through Horizontal Angles (45 - 225)