

IES INDOOR REPORT**PHOTOMETRIC FILENAME : RDXX6XT-30LXXKNDE1-RD6XSGGLX.IES****DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002

[TESTLAB] Photopia 2014.1.0 see: www.ltioptics.com/ies

[ISSUEDATE]

[TESTDATE] Thu Jun 25 2015

[UPDATE] Thu Jan 21 2016

[TEST] SP-00476_7_M-30L

[MANUFAC] Spectrum Lighting

[LUMCAT] RDxx6LEDXT-30L-xxK-ND-E1-RD6x-SG-GLX

[LUMINAIRE] 6" aperture, Narrow Beam

[TRIM] Semi-diffuse, regressed clear glass lens

[LAMP] N/A, Min. 83 CRI

[LAMPCAT] N/A

[OTHER] Total Luminaire Watts is approximate

[OTHER] For Housings: RDFO6 and RDZO6 series

[OTHER] For Trims: RD6F and RD6N series with GLX or GLW

[OTHER] LEDXT lumen output is the same for all available color temperatures

[OTHER] This report prepared by Spectrum Lighting, scaled from 50L report

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2658
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	77
Total Luminaire Watts	34.6
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.46
Spacing Criterion (90-270)	0.46
Spacing Criterion (Diagonal)	0.46
Basic Luminous Shape	Point
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.00 ft
Luminous Height	0.00 ft

IES INDOOR REPORT
PHOTOMETRIC FILENAME : RDXX6XT-30LXXKNDE1-RD6XSGGLX.IES

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	0	0	0
55	0	0	0
65	0	0	0
75	0	0	0
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : RDXX6XT-30LXXKNDE1-RD6XSGGLX.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>
0	9821.592	9821.592	9821.592	9821.592	9821.592
5	9375.768	9550.932	9483.852	9499.116	9575.814
10	7196.796	7207.182	7115.502	7178.406	7116.666
15	3883.476	3887.772	3864.972	3910.830	3910.200
20	1894.518	1897.452	1892.154	1889.892	1881.216
25	1172.334	1158.756	1179.426	1165.224	1176.762
30	713.394	707.778	723.690	717.588	713.688
35	86.520	84.774	87.048	86.676	84.636
40	9.408	11.088	10.542	9.174	9.306
45	2.754	3.018	2.496	3.162	3.072
50	1.506	1.740	1.698	1.890	1.608
55	0.624	0.714	0.612	0.702	0.654
60	0.378	0.450	0.528	0.342	0.378
65	0.156	0.312	0.180	0.396	0.174
70	0.138	0.198	0.222	0.150	0.246
75	0.120	0.108	0.090	0.228	0.168
80	0.030	0.084	0.042	0.036	0.048
85	0.108	0.036	0.000	0.030	0.000
90	0.000	0.036	0.000	0.000	0.000

IES INDOOR REPORT
PHOTOMETRIC FILENAME : RDXX6XT-30LXXKNDE1-RD6XSGGLX.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	1959.5	N.A.	73.70
0-30	2519.14	N.A.	94.80
0-40	2653.22	N.A.	99.80
0-60	2657.32	N.A.	100.00
0-80	2657.74	N.A.	100.00
0-90	2657.78	N.A.	100.00
10-90	1830.54	N.A.	68.90
20-40	693.72	N.A.	26.10
20-50	697.05	N.A.	26.20
40-70	4.38	N.A.	0.20
60-80	0.42	N.A.	0.00
70-80	0.14	N.A.	0.00
80-90	0.03	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	2657.78	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	827.24
10-20	1132.26
20-30	559.64
30-40	134.08
40-50	3.33
50-60	0.77
60-70	0.28
70-80	0.14
80-90	0.03
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : RDXX6XT-30LXXKNDE1-RD6XSGGLX.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96
2	111	107	104	102	109	106	103	100	102	100	98	100	98	96	97	96	94	93
3	107	102	99	96	105	101	98	95	99	96	94	96	94	92	94	92	91	89
4	104	98	94	91	102	97	93	90	95	92	89	93	91	88	92	89	87	86
5	100	94	90	87	99	93	90	87	92	88	86	90	87	85	89	86	84	83
6	97	91	86	83	96	90	86	83	89	85	83	88	84	82	86	84	82	80
7	94	88	83	80	93	87	83	80	86	82	80	85	82	79	84	81	79	78
8	92	85	80	77	91	84	80	77	83	80	77	82	79	77	82	79	76	75
9	89	82	78	75	88	82	77	75	81	77	74	80	77	74	79	76	74	73
10	86	79	75	72	86	79	75	72	78	75	72	78	74	72	77	74	72	71

POLAR GRAPH

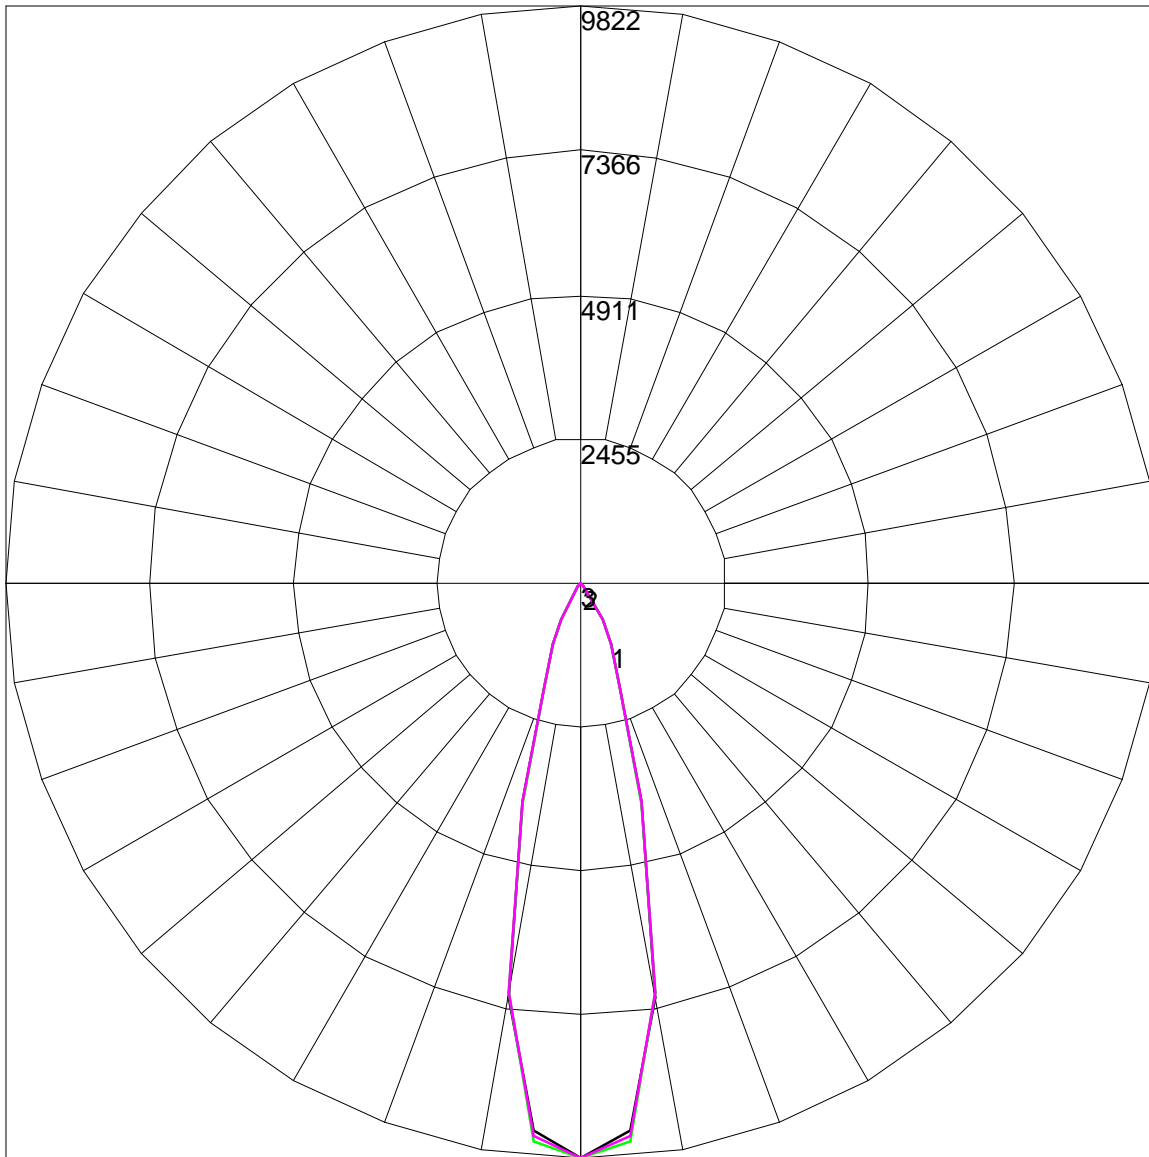

Maximum Candela = 9821.592 Located At Horizontal Angle = 0, Vertical Angle = 0

- # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
- # 2 - Vertical Plane Through Horizontal Angles (90 - 270)
- # 3 - Vertical Plane Through Horizontal Angles (45 - 225)