

## Indoor Distribution Test Report

# Spectrum Lighting Inc.

994 Jefferson Street  
Fall River, MA 02721  
+1.508.678.2303

## Spectrum Lighting Photometric Lab

### Luminaire

SGE10BX 80L 35K WD DO101 AR10BX SG WF  
Nom. 10" Diam x 10" H open aperture, No lens

### Test Number

SP-00683\_6

### Test Date

The results contained in this report pertain only to this IES file.

### Summary of Results

#### Power

Input Watts	60 W
-------------	------

#### Lumen Output

Output Lumens	6460
Efficacy	107.66 lm/W

#### Luminous Dimensions

0° - 180° Size	-0.8
90° - 270° Size	-0.8
Height	0

#### Spacing Criterion

Two luminaires, plane 0°	0.9
Two luminaires, plane 90°	0.91
Four luminaires	0.9


#### Full Beam Angle

0° - 180°	61°
90° - 270°	61°

### IES File Header Contents

Keyword	Value
TEST	SP-00683_6
TESTLAB	Spectrum Lighting Photometric Lab, VLS-245-981
MANUFAC	Spectrum Lighting
ISSUEDATE	6/7/2018
UPDATE	9/24/2019
LUMCAT	SGE10BX 80L 35K WD DO101 AR10BX SG WF
LUMINAIRE	Nom. 10" Diam x 10" H open aperture, No lens
OTHER	Semi-diffuse clear anodized alum. reflector trim
OTHER	Deep regressed retrofit high output LED downlight
OTHER	BX Series, Wide Beam
OTHER	61 Beam Angle
LAMPCAT	N/A
LAMP	N/A, Bridgelux Vero 29
OTHER	Tested CCT: 3500K
OTHER	Total luminaire wattage is approximate
OTHER	This report prepared by Spectrum Lighting
_CCTMULT	27K x 0.932, 30K x 1.00, 40K x 1.01
_LAMPMULT	60L x 0.76, 70L x 0.86
_CRI	80

### Candela Polar Plot

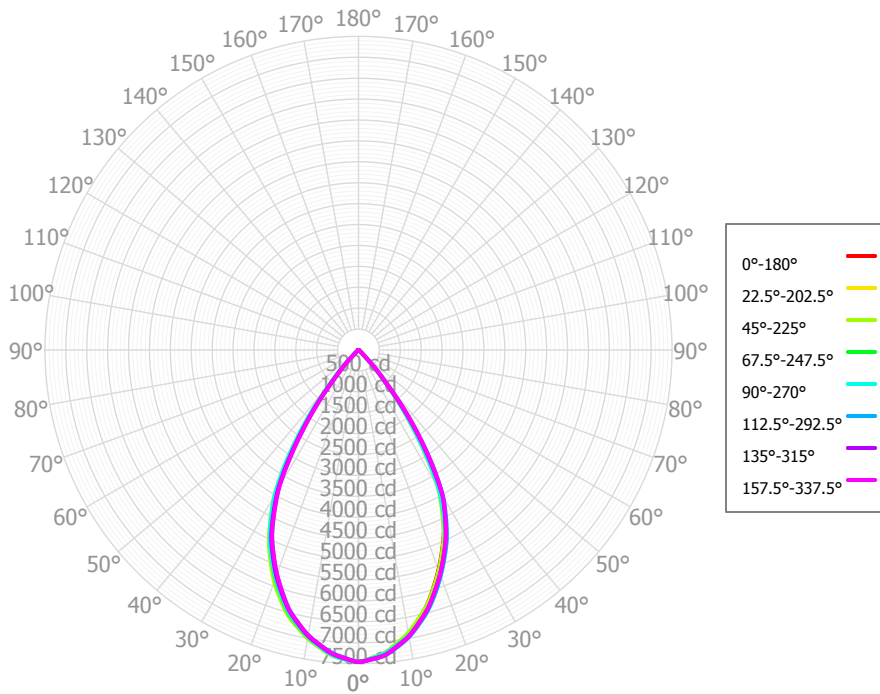

### Zonal Lumen Summary

Zone	Lumens	% Fixture	Zone	Lumens	% Fixture
0.00° - 10.00°	694.34	10.75%	90.00° - 100.00°	0.08	0.00%
10.00° - 20.00°	1,789.29	27.70%	100.00° - 110.00°	0.00	0.00%
20.00° - 30.00°	2,232.54	34.56%	100.00° - 120.00°	0.00	0.00%
30.00° - 40.00°	1,481.64	22.94%	120.00° - 130.00°	0.00	0.00%
40.00° - 50.00°	252.71	3.91%	130.00° - 140.00°	0.00	0.00%
50.00° - 60.00°	6.53	0.10%	140.00° - 150.00°	0.00	0.00%
60.00° - 70.00°	0.91	0.01%	150.00° - 160.00°	0.00	0.00%
70.00° - 80.00°	0.86	0.01%	160.00° - 170.00°	0.00	0.00%
80.00° - 90.00°	0.79	0.01%	170.00° - 180.00°	0.00	0.00%
0.00° - 90.00°	6,459.60	100.00%	0.00° - 180.00°	6,459.68	100.00%

### Candela Distribution

	0.00°	22.50°	45.00°	67.50°	90.00°	112.50°	135.00°	157.50°	180.00°	202.50°	225.00°	247.50°	270.00°	292.50°	315.00°	337.50°	360.00°
0.00°	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22	7,460.22
2.50°	7,382.40	7,384.31	7,369.34	7,391.02	7,379.54	7,372.26	7,388.19	7,379.86	7,403.87	7,390.25	7,406.15	7,397.51	7,409.67	7,411.60	7,399.01	7,407.02	7,382.40
5.00°	7,286.20	7,286.88	7,269.17	7,281.06	7,281.07	7,271.93	7,293.53	7,283.80	7,318.64	7,309.58	7,337.16	7,311.36	7,320.64	7,330.49	7,321.61	7,327.20	7,286.20
7.50°	7,095.99	7,105.72	7,069.32	7,115.30	7,115.62	7,107.47	7,125.79	7,108.10	7,153.21	7,139.81	7,177.08	7,144.53	7,155.26	7,166.00	7,139.34	7,149.45	7,095.99
10.00°	6,893.81	6,903.66	6,866.44	6,932.11	6,934.55	6,925.43	6,946.45	6,925.38	6,971.55	6,961.15	7,008.95	6,966.29	6,965.10	6,972.38	6,948.54	6,956.15	6,893.81
12.50°	6,611.44	6,630.46	6,596.07	6,687.15	6,693.52	6,679.96	6,699.08	6,678.58	6,733.53	6,736.35	6,786.14	6,742.29	6,730.88	6,716.80	6,679.61	6,686.29	6,611.44
15.00°	6,319.75	6,337.81	6,323.11	6,421.25	6,432.71	6,413.45	6,439.51	6,422.41	6,482.86	6,495.56	6,557.51	6,497.37	6,481.15	6,438.25	6,403.79	6,402.69	6,319.75
17.50°	5,958.59	5,992.44	5,969.76	6,089.40	6,088.45	6,065.59	6,102.48	6,063.40	6,150.44	6,164.03	6,234.82	6,162.20	6,154.31	6,103.98	6,055.62	6,060.27	5,958.59
20.00°	5,595.49	5,631.64	5,615.86	5,733.80	5,734.03	5,708.11	5,750.30	5,701.48	5,798.23	5,820.90	5,900.76	5,814.81	5,798.70	5,747.81	5,705.03	5,706.34	5,595.49
22.50°	5,215.52	5,262.16	5,227.91	5,343.13	5,333.31	5,310.65	5,349.88	5,302.02	5,401.40	5,403.21	5,491.23	5,409.08	5,416.15	5,377.02	5,323.11	5,327.70	5,215.52
25.00°	4,829.21	4,889.91	4,839.38	4,938.85	4,913.47	4,890.91	4,938.97	4,893.80	4,992.72	4,971.72	5,071.46	4,986.91	5,022.95	5,000.05	4,936.89	4,943.81	4,829.21
27.50°	4,380.22	4,414.32	4,324.20	4,431.03	4,399.12	4,368.78	4,408.42	4,349.07	4,471.98	4,441.84	4,553.83	4,479.34	4,532.94	4,539.34	4,483.54	4,497.18	4,380.22
30.00°	3,907.52	3,903.71	3,809.02	3,880.63	3,843.87	3,805.93	3,849.74	3,793.88	3,919.31	3,885.48	4,020.98	3,935.43	4,001.74	4,041.20	4,016.46	4,035.79	3,907.52
32.50°	3,148.92	3,197.85	3,020.36	3,157.00	3,062.69	3,040.23	3,117.86	3,017.82	3,192.49	3,117.99	3,291.88	3,179.52	3,302.94	3,349.49	3,259.30	3,334.90	3,148.92
35.00°	2,392.49	2,420.44	2,228.78	2,358.03	2,292.85	2,282.17	2,342.14	2,244.39	2,412.67	2,356.54	2,529.18	2,426.30	2,528.82	2,565.00	2,501.41	2,573.40	2,392.49
37.50°	1,667.51	1,716.21	1,571.04	1,665.23	1,591.71	1,566.68	1,631.48	1,546.39	1,700.20	1,651.63	1,801.52	1,690.33	1,788.97	1,806.57	1,722.46	1,822.61	1,667.51
40.00°	959.81	1,040.41	916.34	1,021.97	929.48	897.70	938.86	854.71	1,010.00	970.97	1,080.60	991.99	1,065.65	1,061.29	952.09	1,074.80	959.81
42.50°	558.84	598.42	540.67	584.67	535.81	513.17	532.43	498.19	573.20	552.17	626.30	561.69	596.85	587.25	563.38	615.96	558.84
45.00°	170.35	252.60	174.76	248.70	177.73	166.98	210.86	143.69	225.47	157.60	227.73	169.77	257.30	257.48	176.79	242.80	170.35
47.50°	95.56	101.12	89.48	92.61	93.72	88.05	87.31	79.19	88.61	86.80	101.11	94.84	98.76	99.71	98.14	103.00	95.56
50.00°	22.48	35.56	18.62	31.22	17.54	17.21	27.59	14.70	31.82	19.62	37.44	25.95	36.99	39.66	19.48	37.00	22.48
52.50°	12.12	10.74	8.37	6.73	9.28	9.29	8.71	8.61	11.22	11.19	16.03	13.71	10.85	12.43	10.82	13.22	12.12
55.00°	1.88	4.95	2.02	2.68	1.70	2.14	3.85	2.79	5.17	3.11	5.15	2.43	5.04	4.79	2.48	3.92	1.88
57.50°	1.54	2.42	1.51	1.09	1.29	1.74	2.25	1.97	2.57	2.03	2.31	1.97	2.26	1.58	1.50	1.21	1.54
60.00°	1.20	1.52	1.48	0.95	0.91	1.36	1.83	1.26	1.42	1.00	1.62	1.52	1.29	1.18	0.66	0.91	1.20
62.50°	1.11	0.98	1.09	0.79	0.97	1.19	1.37	1.01	1.02	1.27	1.27	1.21	0.80	1.05	0.64	0.80	1.11
65.00°	1.02	0.62	0.65	0.61	1.01	1.02	0.90	0.78	0.95	1.53	1.03	0.92	0.63	1.08	0.63	0.78	1.02
67.50°	0.86	0.68	0.60	0.55	0.87	0.78	0.75	0.59	0.92	1.19	0.74	0.86	0.51	1.03	0.67	0.81	0.86
70.00°	0.74	0.97	0.58	0.56	0.77	0.61	0.73	0.44	0.90	0.93	0.44	0.79	0.41	0.91	0.70	0.86	0.74
72.50°	0.88	1.10	0.54	0.67	0.84	0.74	0.76	0.67	0.81	1.21	0.61	0.69	0.73	0.90	0.56	0.79	0.88
75.00°	0.95	1.13	0.54	0.83	0.89	1.03	0.80	0.79	0.75	1.25	0.76	0.67	1.13	0.93	0.53	0.71	0.95
77.50°	0.92	0.67	0.59	1.05	0.92	1.52	0.82	0.73	0.90	0.93	0.59	0.76	0.88	0.78	0.68	0.75	0.92
80.00°	0.89	0.51	0.95	1.10	0.58	0.84	0.87	0.76	0.85	0.77	0.79	1.03	0.73	0.76	0.53	0.78	0.89
82.50°	0.72	0.63	0.79	1.02	0.41	0.54	0.81	0.92	0.67	0.72	0.88	0.86	0.67	0.80	0.66	0.77	0.72
85.00°	0.53	0.78	0.54	0.88	0.47	0.55	0.81	0.89	0.51	0.79	0.66	0.69	0.77	0.79	0.93	0.61	0.53
87.50°	0.62	0.61	1.01	0.68	0.63	0.95	0.73	0.58	0.82	1.13	1.19	0.77	0.56	0.60	0.66	0.54	0.62
90.00°	0.34	0.19	0.62	0.49	0.51	0.62	0.68	1.00	0.16	0.65	0.72	0.71	0.81	0.20	0.70	1.02	0.34
92.50°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95.00°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
97.50°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
102.50°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105.00°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
107.50°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110.00°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
112.50°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

### Coefficients of Utilization – Zonal Cavity Method

Values are lumens delivered to the workplane.

	<b>pfc</b>	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	0%
	<b>pcc</b>	80%	80%	80%	80%	70%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	0%
	<b>pw</b>	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	30%
<b>RCR</b>	<b>0</b>	7,690	7,690	7,690	7,690	7,511	7,511	7,511	7,511	7,177	7,177	7,177	6,872	6,872	6,872	6,591	6,591	6,460
	<b>1</b>	7,343	7,168	7,012	6,871	7,184	7,029	6,889	6,762	6,768	6,656	6,554	6,528	6,440	6,359	6,307	6,239	6,115
	<b>2</b>	6,992	6,686	6,433	6,220	6,850	6,575	6,345	6,151	6,367	6,179	6,016	6,175	6,022	5,887	5,998	5,874	5,764
	<b>3</b>	6,651	6,247	5,935	5,686	6,523	6,158	5,871	5,640	5,989	5,748	5,550	5,833	5,632	5,463	5,689	5,522	5,380
	<b>4</b>	6,323	5,848	5,500	5,235	6,208	5,775	5,452	5,203	5,637	5,360	5,142	5,508	5,273	5,082	5,389	5,189	5,024
	<b>5</b>	6,010	5,484	5,116	4,845	5,906	5,423	5,080	4,823	5,309	5,010	4,780	5,202	4,942	4,738	5,102	4,878	4,697
	<b>6</b>	5,715	5,152	4,774	4,503	5,621	5,101	4,746	4,488	5,005	4,691	4,457	4,915	4,639	4,427	4,831	4,588	4,398
	<b>7</b>	5,436	4,849	4,468	4,201	5,351	4,806	4,446	4,190	4,724	4,402	4,167	4,648	4,360	4,145	4,576	4,320	4,124
	<b>8</b>	5,175	4,571	4,192	3,931	5,097	4,535	4,174	3,923	4,465	4,139	3,906	4,399	4,105	3,890	4,338	4,072	3,874
	<b>9</b>	4,930	4,317	3,942	3,689	4,859	4,286	3,927	3,682	4,226	3,899	3,670	4,169	3,871	3,657	4,115	3,844	3,645
	<b>10</b>	4,702	4,085	3,716	3,470	4,637	4,057	3,704	3,465	4,005	3,680	3,455	3,956	3,657	3,446	3,909	3,635	3,436

### Cone of Light

Mtg Height	Light Level	Beam Diameter
5.5 ft	246.6 fc	6.5 ft
6.5 ft	176.6 fc	7.7 ft
7.5 ft	132.6 fc	8.9 ft
8.0 ft	116.6 fc	9.5 ft
10.0 ft	74.6 fc	11.8 ft
12.0 ft	51.8 fc	14.2 ft
14.0 ft	38.1 fc	16.6 ft
16.0 ft	29.1 fc	18.9 ft
20.0 ft	18.7 fc	23.7 ft
24.0 ft	13.0 fc	28.4 ft
28.0 ft	9.5 fc	33.1 ft

### Average Luminaire Luminance [cd/m²]

	0.00°	45.00°	90.00°
<b>0.00°</b>	159,754	159,754	159,754
<b>45.00°</b>	5,159	5,293	5,382
<b>55.00°</b>	70	75	63
<b>65.00°</b>	51	33	51
<b>75.00°</b>	79	45	74
<b>85.00°</b>	131	134	115

### UGR CIE 190:2010

<b>Ceiling reflectance</b>		<b>0.7</b>	<b>0.7</b>	<b>0.5</b>	<b>0.5</b>	<b>0.3</b>	<b>0.7</b>	<b>0.7</b>	<b>0.5</b>	<b>0.5</b>	<b>0.3</b>
<b>Wall reflectance</b>		<b>0.5</b>	<b>0.3</b>	<b>0.5</b>	<b>0.3</b>	<b>0.3</b>	<b>0.5</b>	<b>0.3</b>	<b>0.5</b>	<b>0.3</b>	<b>0.3</b>
<b>Plane reflectance</b>		<b>0.2</b>	<b>0.2</b>	<b>0.2</b>	<b>0.2</b>	<b>0.2</b>	<b>0.2</b>	<b>0.2</b>	<b>0.2</b>	<b>0.2</b>	<b>0.2</b>
<b>Room dimensions</b>		<b>Viewed crosswise</b>					<b>Viewed endwise</b>				
<b>2H</b>	<b>2H</b>	-19.1	-18.2	-18.7	-17.9	-17.6	-19.0	-18.1	-18.7	-17.8	-17.5
	<b>3H</b>	-18.2	-17.3	-17.8	-17.0	-16.6	-18.3	-17.5	-17.9	-17.2	-16.8
	<b>4H</b>	-17.0	-16.2	-16.6	-15.9	-15.5	-17.2	-16.5	-16.8	-16.1	-15.7
	<b>6H</b>	-15.7	-15.0	-15.3	-14.6	-14.2	-15.8	-15.1	-15.3	-14.7	-14.3
	<b>8H</b>	-15.0	-14.4	-14.6	-14.0	-13.6	-15.3	-14.7	-14.9	-14.3	-13.9
	<b>12H</b>	-14.4	-13.8	-14.0	-13.4	-13.0	-14.7	-14.0	-14.2	-13.7	-13.2
<b>4H</b>	<b>2H</b>	-19.2	-18.5	-18.8	-18.1	-17.7	-18.9	-18.1	-18.5	-17.8	-17.4
	<b>3H</b>	-17.8	-17.2	-17.4	-16.8	-16.4	-17.9	-17.3	-17.5	-16.9	-16.5
	<b>4H</b>	-16.3	-15.7	-15.8	-15.3	-14.9	-16.4	-15.9	-16.0	-15.4	-15.0
	<b>6H</b>	-14.7	-14.3	-14.3	-13.8	-13.4	-14.5	-14.0	-14.0	-13.5	-13.1
	<b>8H</b>	-13.9	-13.5	-13.4	-13.0	-12.6	-13.9	-13.4	-13.4	-13.0	-12.5
	<b>12H</b>	-13.2	-12.8	-12.7	-12.3	-11.8	-13.1	-12.7	-12.6	-12.3	-11.8
<b>8H</b>	<b>4H</b>	-16.0	-15.6	-15.5	-15.1	-14.7	-15.9	-15.5	-15.4	-15.0	-14.6
	<b>6H</b>	-14.2	-13.9	-13.7	-13.4	-12.9	-13.6	-13.3	-13.1	-12.8	-12.3
	<b>8H</b>	-13.2	-12.9	-12.6	-12.3	-11.8	-12.8	-12.5	-12.3	-12.0	-11.5
	<b>12H</b>	-12.1	-11.8	-11.5	-11.3	-10.7	-11.9	-11.6	-11.3	-11.1	-10.5
<b>12H</b>	<b>4H</b>	-15.8	-15.5	-15.3	-15.0	-14.5	-15.8	-15.4	-15.3	-14.9	-14.4
	<b>6H</b>	-14.0	-13.7	-13.4	-13.2	-12.6	-13.4	-13.1	-12.8	-12.6	-12.1
	<b>8H</b>	-12.8	-12.5	-12.3	-12.0	-11.4	-12.4	-12.2	-11.9	-11.7	-11.1

Corrected UGR values based on total output lumens

SHR = 1.0