




QUADRO 6" / 8" PENDANT

DAMP LOCATION

QUADRO

PROJECT: _____

QUANTITY: _____ TYPE: _____

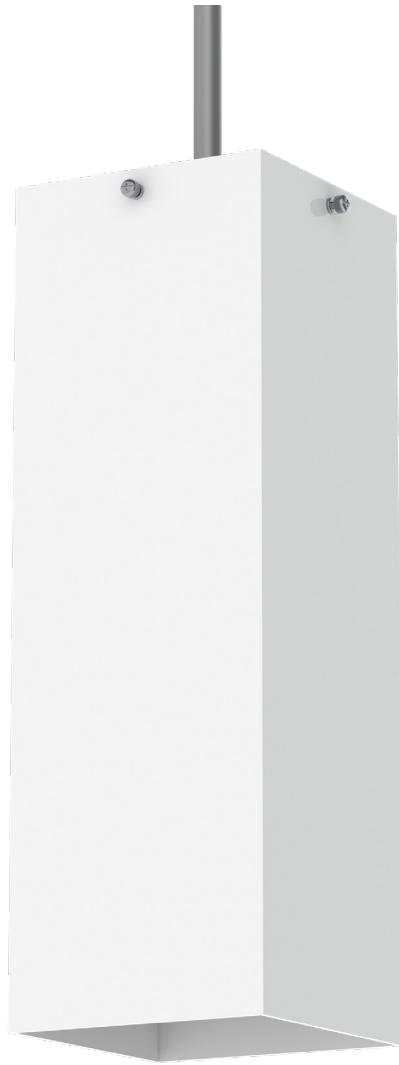

CY0618SQFAGV
PT - Platinum Silver



CY0618SQFAGV
BZ - Bronze



CY0820SQFAGV
MB - Matte Black

SERIES	LUMENS ¹		CCT		DRIVER / DIMMING ²		OPTIONS ³		MOUNTING ⁴		FINISH ⁸	
CY0618SQFAGV CY0820SQFAGV	15L 27L	1500 Lm 2700 Lm	27K 30K 35K 40K	2700K 3000K 3500K 4000K	EX DO10X DS2W1	Electronic Driver, 120V/277V 1% 0-10V, 120V/277V ELV/MLV, 120V	FS	Fusing	RDC5 ⁵ HM ⁶ AT ⁶ PM ⁶ CD ⁶ CM ⁶ EMCR ⁷ EMRM EMEN	Small Driver Canopy Hang Straight Hang Straight All Thread Rigid Pendant Mount Cord / Cable Mount Cord Mount 10W Canopy Mounted EM 7W Remote EM 7W Remote with Enclosure	MW ⁹ MB ⁹ PT ⁹ CC	Matte White Matte Black Platinum Silver Custom Color See Page 5 for Full Range of Color Options (83-90081)

EXAMPLE: CY0820SQFAGV15L27KEX/RDC5CD36MW

NOTES:
1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 See Product Options Page for Details 4 See Mounting Page for Details on Components and Finishes
5 Required for Driver 6 Specify Length in Inches: See Mounting Page for Available Lengths 7 EMCR Replaces RDC5 8 See Color Page for More Options/Consult Factory for Special Finishes
9 Standard Finishes





QUADRO 6" / 8" PENDANT


DAMP LOCATION

QUADRO

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
CY0618SQFAGV15L	1500	843	10	84
CY0618SQFAGV27L	2700	1479	19	78

¹ Nominal Source Lumens at 35K ² Nominal Delivered Lumens at 35K

HOUSING DIMENSIONS

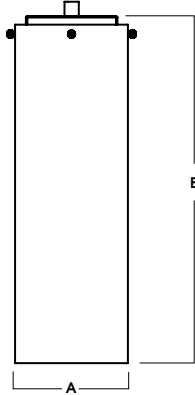

SERIES	A	B
CY0618SQFAGV	6.0	18.5
CY0820SQFAGV	8.0	20.5

APPLICATION

Quadro 6" and 8" Pendants features clean design for a variety of architectural area lighting applications. Opal White acrylic shade glows softly and evenly.

FEATURES

Speculume series fixtures offer contemporary style with functional luminaire performance. Fixtures are designed and manufactured in our factory. LED module and drivers are replaceable and upgradable. Electronic LED Driver in canopy for thermal management. A variety of sizes, finishes and mounting are available.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixtures constructed of formed aluminum and opal white acrylic.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

SERIES SIZES

CY0618SQFAGV



CY0820SQFAGV



CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / PM

HANG STRAIGHT / PENDANT



CY0618SQFAGV SHOWN WITH PM

CD

CORD / CABLE MOUNT



CY0618SQFAGV SHOWN WITH CD

CM

CORD MOUNT



CY0618SQFAGV SHOWN WITH CM






QUADRO 6" / 8" PENDANT

DAMP LOCATION

QUADRO

DECORATIVE

CY0618SQFAGV 27L 35K XX XX MW

CANDLEPOWER CURVE TEST SP-00989	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT									
	0°	0° - 10°	Mounting Height AFF	FC at Center on Floor	Beam Diameter	FC at Beam Edge	Ceiling Height	Fixture Spacing	RCR 3		RCR 5		
	0° 944	0° - 10° 87 6%							FC *	W/Sq. Ft.	FC *	W/Sq. Ft.	
	20° 251	0° - 30° 284 19%					14'	4'	60	1.22	52	1.32	
	40° 95	0° - 60° 549 37%					18'	6'	30	0.60	26	0.65	
	60° 106	90° - 120° 398 27%					22'	8'	14	0.27	10	0.25	
	80° 119	90° - 150° 484 33%					Delivered Illuminance Rating: (DIR)		49 FC per W/Sq. Ft.		40 FC per W/Sq. Ft.		
	90° 120	Downlight 993 67%											
	100° 118	Uplight 486 33%											
	120° 96	Total 1,479 100%											
	140° 26												
	160° 2												
	180° 1												
2' Suspension Length to luminous height midpoint Square rooms used for multiple units: RCR 3: Length & Width = Ceiling Ht. - 5.5' x 3.33 RCR 5: Length & Width = Ceiling Ht. - 5.5' x 2.00 + Average Footcandles at 2.5' Above Floor													


Delivered Lumens: 1,479
Luminaire Watts: 19
LER: 77.84

CRI: 80+

Beam Angle: 25°
Spacing Ratio: 0.43

Lumen Multiplier: 15L x 0.57
CCT Multiplier: 27K x 0.97, 30K x 0.99, 40K x 1.03

CY0820SQFAGV 27L 35K XX XX MW

CANDLEPOWER CURVE TEST SP-00993	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT										
	0°	0° - 10°	91	6%	Mounting Height AFF	FC at Center on Floor	Beam Diameter	FC at Beam Edge	Ceiling Height	Fixture Spacing	RCR 3		RCR 5	
	0° 941	0° - 30°	337	22%							FC +	W/Sq. Ft.	FC +	W/Sq. Ft.
	20° 260	0° - 60°	617	40%	8'	15 fc	4.0'	7 fc	18'	5'	37	0.70	33	0.76
	40° 106	90° - 120°	391	25%	10'	9 fc	5.0'	5 fc	22'	7'	21	0.40	19	0.44
	60° 106	90° - 150°	504	33%	12'	7 fc	5.9'	3 fc	26'	9'	14	0.26	8	0.18
	80° 112	Downlight	1,041	67%	14'	5 fc	6.9'	2 fc	Delivered Illuminance Rating: (DIR)		53 FC per W/Sq. Ft.		43 FC per W/Sq. Ft.	
	90° 114	Uplight	508	33%	16'	4 fc	7.9'	2 fc						
	100° 113	Total	1,548	100%	20'	2 fc	9.9'	1 fc	3' Suspension Length to luminous height midpoint Square rooms used for multiple units: RCR 3: Length & Width = Ceiling Ht. - 5.5' x 3.33 RCR 5: Length & Width = Ceiling Ht. - 5.5' x 2.00 + Average Footcandles at 2.5' Above Floor					
	120° 94				24'	2 fc	11.9'	1 fc						
	140° 43				28'	1 fc	13.9'	1 fc						
	160° 5													
	180° 1													

Delivered Lumens: 1,548
Luminaire Watts: 19
LER: 81.47

CRI: 80+

Beam Angle: 28°
Spacing Ratio: 0.49

Lumen Multiplier: 15L x 0.57
CCT Multiplier: 27K x 0.97, 30K x 0.99, 40K x 1.03



MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.
NOTE: THIS IS TYPICAL OF SPEC LUME SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



CEILING MOUNTING

RDC5 - SMALL DRIVER CANOPY (STANDARD) MOUNTS TO 4" OCTO J-BOX ORDER: HM (Length) SPECIFY LENGTH: HM3 - 3" HM24 - 24" HM6 - 6" HM36 - 36" HM12 - 12" HM48 - 48" HM18 - 18" HM72 - 72" HMLC(XX) Custom Length (Specify in Inches)	HM* HANG STRAIGHT 45° SWIVEL 1/2" STEM - 3/8" NPT ORDER: HM (Length) SPECIFY LENGTH: HM3 - 3" HM24 - 24" HM6 - 6" HM36 - 36" HM12 - 12" HM48 - 48" HM18 - 18" HM72 - 72" HMLC(XX) Custom Length (Specify in Inches)	AT** HANG STRAIGHT ALL THREAD 45° SWIVEL 1/2" STEM - 1/4" IP ORDER: AT (Length) SPECIFY LENGTH: AT12 - 12" AT24 - 24" AT36 - 36" ATLC(XX) Custom Length (Specify in Inches) FIELD CUT THREADED PIPE TO LENGTH NEEDED. CUT PIPE COVER SHIP SHOWN THREADED PIPE. SUPPLY COVER OVER THREADED PIPE.	PM* RIGID PENDANT MOUNT RIGID 1/2" STEM - 3/8" NPT ORDER: PM (Length) SPECIFY LENGTH: PM3 - 3" PM24 - 24" PM6 - 6" PM36 - 36" PM12 - 12" PM48 - 48" PM18 - 18" PM72 - 72" PMLC(XX) Custom Length (Specify in Inches)	CD CORD / CABLE MOUNT SJ CORD WITH 1/16 SS CABLE ORDER: CD (Length) SPECIFY LENGTH: CD36 - 36" CD72 - 72" CD144 - 144" CDLC(XX) Custom Length (Specify in Inches)	CM CORD MOUNT SJ CORD WITH STRAIN RELIEF ORDER: CM (Length) SPECIFY LENGTH: CM36 - 36" CM72 - 72" CM144 - 144" CMLC(XX) Custom Length (Specify in Inches)
--	--	--	---	--	--

*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.

EMERGENCY BATTERY OPTIONS

EMCR - LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY (FOR ROUND CEILING MOUNT TYPES)

REMOTE EMERGENCY BATTERY OPTIONS

EMRM* - 7W REMOTE EMERGENCY BATTERY (50' MAX) <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>1.3</td> <td>12.6</td> <td>13.0</td> </tr> </tbody> </table>	A	B	C	1.3	12.6	13.0	EMEN* - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX) <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>2.0</td> <td>17.0</td> <td>6.2</td> </tr> </tbody> </table>	A	B	C	2.0	17.0	6.2
A	B	C											
1.3	12.6	13.0											
A	B	C											
2.0	17.0	6.2											

*OTHER EM BATTERY SIZES AVAILABLE, CONSULT FACTORY



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

PAINT TIMES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	①
Tier 2 - Typical Finishes	\$\$	①①
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES

MW Matte White	GW Gloss White	PT Platinum Silver	MB Matte Black	GB Gloss Black	BZ Bronze

TIER 2 - TYPICAL FINISHES

TW Textured White	TB Textured Black	MT* Textured Silver	OB* Oil Rubbed Bronze	SN Sun Gold	CO Copper Metallic	BR Brecchia	GH Graphite	CH Charcoal	AL Almond	VE Verde Green
BL Blue Streak	RD Red Baron	OR Orange	CM Carmel	PL Purple	PG Pub Green	TQ Turquoise	SF Sea Foam	PK Pink	AY Aero Yellow	EG Evergreen
LG Lime Green	LB Light Blue	BY Burgundy	AK Anodic Black	AM Anodic Malachite	AZ Anodic Bronze	AS Anodic Sapphire	AN Anodic Natural	AC Anodic Champagne		

CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

