


6" ROUND LENSED DOWNLIGHT

PROJECT: _____
 QUANTITY: _____ TYPE: _____

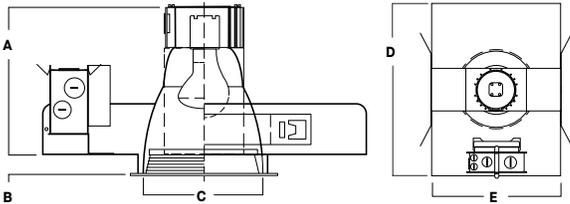

A	B	C	D	E
7.4	1.0	6.0	16.0	12.0
187.3 mm	25.4 mm	152.4 mm	406.4 mm	304.8 mm

SG6IN

APPLICATION

6" aperture lens downlight for A and PAR LED lamps.

FEATURES

Efficient reflector design optimized for A, PAR, and R LED lamps (Sold by others). Posi-lock reflector attachment. Integral 5/8" (0.625") plaster ring. Tool-less access for ease of maintenance. Multi-bar adjustable mounting brackets.

TRIM FINISH

Variety of powdercoat and anodized finishes available on trim.

LAMPING

Accepts E26 medium base A lamps and PAR20/30/38 lamps.

CONSTRUCTION

Frame constructed of 20 ga. galvanized steel. Reflectors spun from .063" high purity aluminum and finished to specification.

CODE COMPLIANCE

ETL listed for damp locations. Wet location available. Manufactured and tested to UL Standard No. 1598.

PRODUCT SELECTOR GUIDE

SERIES	BAR HANGERS	TRIM	FINISH	FLANGE FINISH	LENS
SG6IN	/	AR6425			

EXAMPLE

SG6IN	/	BH27	/	AR6425	SG	MF	SO
-------	---	------	---	--------	----	----	----

HOUSING

MOUNTING OPTIONS

TRIM OPTIONS

SERIES	BAR HANGERS	TRIM	FINISH	FLANGE FINISH	LENS
SG6IN	BH27 27" Solid Bars H12 12" - 24" Expandable Bars	AR6425	SG Semi-Diffuse	MF Matching Flange WF White Flange For Use with Non-White Trim Finish	GL Clear Glass Lens SO Micro Prism Solite™ Lens WL Wet Location
			Low Iridescent		
			MW Matte White MB Matte Black		

