

IES INDOOR REPORT**PHOTOMETRIC FILENAME : SGV8LEDGV-37L35KE1-AR8710GVSG.IES****DESCRIPTION INFORMATION (From Photometric File)**

IESNA:LM-63-2002

[TESTLAB] Photopia 2014.1.0 see: www.ltioptics.com/ies

[ISSUE DATE]

[TEST DATE] Aug 20 2015

[UPDATE] Apr 20 2016

[TEST] SP-00396_21

[MANUFAC] Spectrum Lighting

[LUMCAT] SGV8LEDGV-37L-35K-E1-AR8710GV-SG

[LUMINAIRE] 8" Diam. LED downlight, semi-diffuse clear anodized cone

[LAMP] N/A

[LAMPCAT] N/A

[OTHER] Total Luminaire Wattage is approximate

[OTHER] CCT Output Multipliers: 50K x 1.07, 40K x 1.03, 30K x 0.98, 27K x 0.97

[OTHER] This report generated by Spectrum Lighting

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3020
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	104
Total Luminaire Watts	29.1
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.48
Spacing Criterion (90-270)	1.48
Spacing Criterion (Diagonal)	1.28
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.63 ft (Diameter)
Luminous Width (90-270)	0.63 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	27668	27925	28306
55	6728	6801	6772
65	1989	1869	1907
75	1371	1390	1339
85	792	917	857

IES INDOOR REPORT
 PHOTOMETRIC FILENAME : SGV8LEDGV-37L35KE1-AR8710GVSG.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>
0	1296.67	1296.67	1296.67	1296.67	1296.67	1296.67	1296.67	1296.67	1296.67
5	1300.31	1343.45	1330.30	1327.02	1328.13	1337.19	1329.12	1321.25	1317.52
10	1503.44	1500.79	1488.20	1471.17	1486.13	1484.96	1484.09	1481.23	1497.79
15	1757.14	1767.11	1778.81	1786.86	1751.89	1780.73	1773.16	1762.23	1789.39
20	2022.44	2034.58	2020.65	2025.51	2018.60	2027.51	2024.24	2038.92	2037.31
25	2099.29	2088.39	2071.61	2090.80	2094.27	2098.20	2077.09	2102.35	2080.22
30	1791.06	1802.96	1807.00	1785.70	1804.41	1821.15	1797.32	1808.00	1796.98
35	1362.57	1366.05	1372.70	1382.31	1375.01	1382.90	1389.79	1384.10	1365.46
40	906.11	914.01	917.63	909.46	922.98	919.57	912.16	926.43	928.59
45	558.14	562.92	563.33	564.29	571.02	567.19	575.53	568.35	559.95
50	272.14	279.72	279.80	279.02	278.33	287.66	284.21	282.07	289.48
55	110.10	108.17	111.29	111.80	110.81	113.12	111.98	111.51	114.66
60	40.87	43.01	42.95	42.61	41.85	42.12	42.21	42.76	43.03
65	23.98	23.53	22.54	22.35	22.99	24.14	23.11	23.70	23.21
70	14.96	15.33	14.45	15.02	14.96	14.78	15.36	14.47	14.84
75	10.12	10.38	10.26	9.77	9.89	10.46	10.38	9.80	10.20
80	6.02	6.03	6.34	6.11	6.16	6.13	5.47	6.13	5.31
85	1.97	2.25	2.28	2.19	2.13	2.20	2.26	2.16	2.06
90	0.12	0.07	0.16	0.29	0.18	0.27	0.35	0.13	0.33

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SGV8LEDGV-37L35KE1-AR8710GVSG.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	638.52	N.A.	21.10
0-30	1562.76	N.A.	51.70
0-40	2413.82	N.A.	79.90
0-60	2980.88	N.A.	98.70
0-80	3017.37	N.A.	99.90
0-90	3020.25	N.A.	100.00
10-90	2888.16	N.A.	95.60
20-40	1775.3	N.A.	58.80
20-50	2221.39	N.A.	73.50
40-70	592.69	N.A.	19.60
60-80	36.49	N.A.	1.20
70-80	10.87	N.A.	0.40
80-90	2.88	N.A.	0.10
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	3020.25	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	132.09
10-20	506.43
20-30	924.24
30-40	851.06
40-50	446.09
50-60	120.97
60-70	25.63
70-80	10.87
80-90	2.88
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : SGV8LEDGV-37L35KE1-AR8710GVSG.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92
2	106	100	95	91	103	98	94	90	95	92	88	92	89	87	89	87	85	83
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	79	77	75
4	93	84	78	73	91	83	77	72	81	75	71	79	74	70	77	73	70	68
5	87	77	70	65	85	76	70	65	74	69	64	73	68	64	71	67	63	62
6	82	71	64	59	80	70	64	59	69	63	59	67	62	58	66	61	58	56
7	77	66	59	54	75	65	58	54	64	58	53	62	57	53	61	56	53	51
8	72	61	54	49	71	60	54	49	59	53	49	58	53	49	57	52	48	47
9	68	57	50	45	66	56	49	45	55	49	45	54	48	45	53	48	44	43
10	64	53	46	41	63	52	46	41	51	45	41	50	45	41	50	45	41	39

POLAR GRAPH

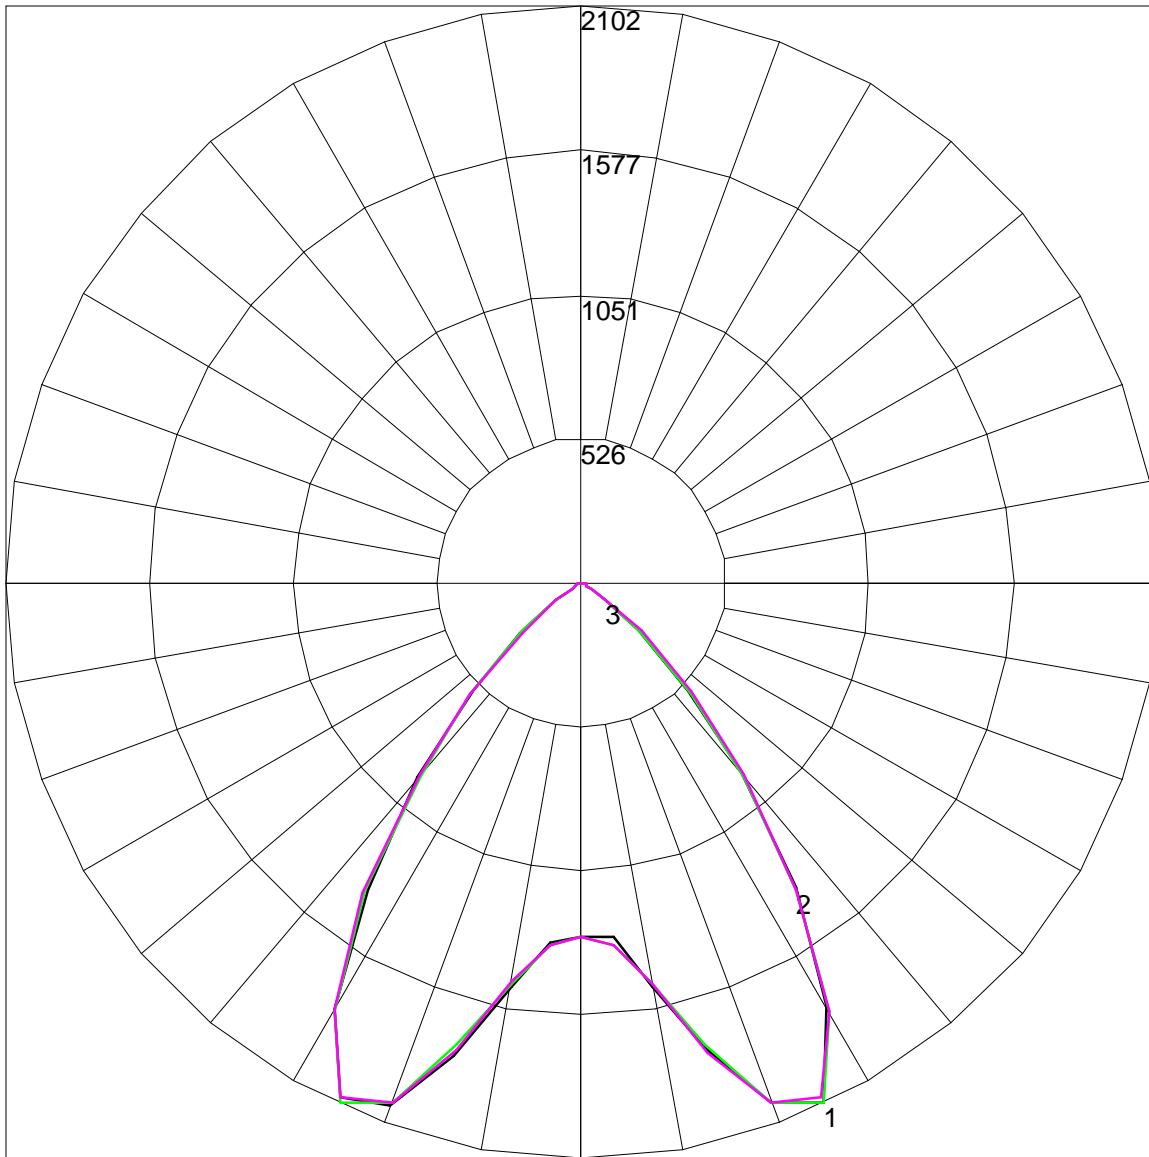

Maximum Candela = 2102.35 Located At Horizontal Angle = 157.5, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (0 - 180)
2 - Vertical Plane Through Horizontal Angles (90 - 270)
3 - Vertical Plane Through Horizontal Angles (45 - 225)