

Indoor Distribution Test Report

Spectrum Lighting Inc.

994 Jefferson Street
Fall River, MA 02721
+1.508.678.2303

Spectrum Lighting Photometric Lab

Luminaire

IF03SMx xx 835 015 DLNFGN MW
Nom 3" Square Infinium recessed downlight

Test Number

SP-00763_1_M-015L

Test Date

The results contained in this report pertain only to this IES file.

Summary of Results

Power

Input Watts	12.2 W
-------------	--------

Lumen Output

Output Lumens	722
Efficacy	59.21 lm/W

Luminous Dimensions

0° - 180° Size	0.16
90° - 270° Size	0.16
Height	0

Spacing Criterion

Two luminaires, plane 0°	0.51
Two luminaires, plane 90°	0.51
Four luminaires	0.56


Full Beam Angle

0° - 180°	31°
90° - 270°	31°

IES File Header Contents

Keyword	Value
TEST	SP-00763_1_M-015L
TESTLAB	Spectrum Lighting Photometric Lab, VLS-245-981
MANUFAC	Spectrum Lighting
ISSUEDATE	2/11/2019
UPDATE	2/28/2019
LUMCAT	IF03SMx xx 835 015 DLNFGN MW
LUMINAIRE	Nom 3" Square Infinium recessed downlight
OTHER	Beam Angle: 31 degrees
OTHER	Narrow Flood optic, Open aperture / no lens
OTHER	Aluminum bezel
LAMPCAT	N/A
LAMP	N/A, CRI: 80, Philips
OTHER	CCT Multiplier: 40K x 1.03
OTHER	Total luminaire wattage is approximate
OTHER	This report prepared by Spectrum Lighting, scaled from 20L

Candela Polar Plot

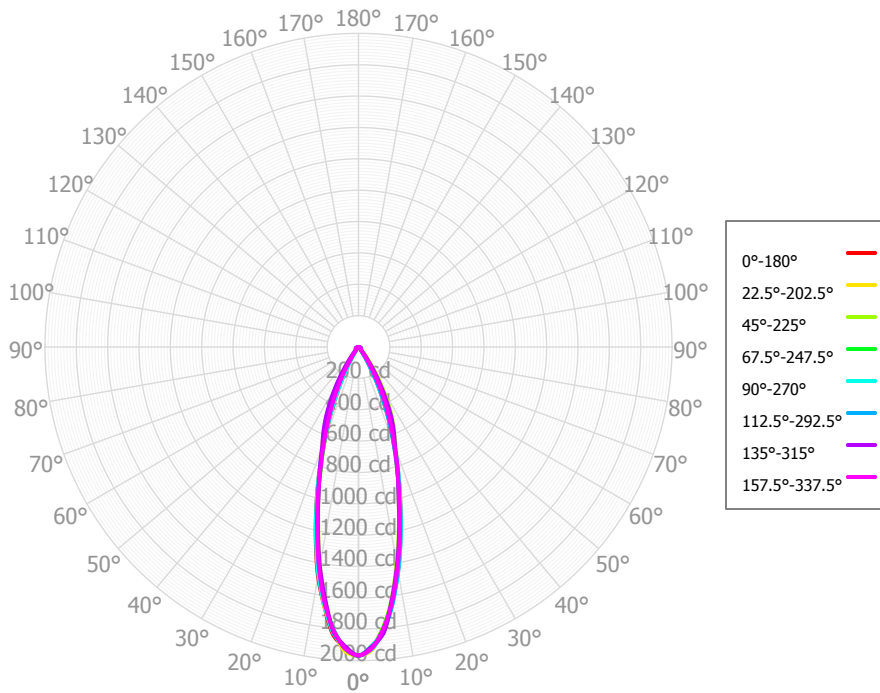

Zonal Lumen Summary

Zone	Lumens	% Fixture	Zone	Lumens	% Fixture
0.00° - 10.00°	162.46	22.49%	90.00° - 100.00°	0.06	0.01%
10.00° - 20.00°	276.44	38.27%	100.00° - 110.00°	0.00	0.00%
20.00° - 30.00°	183.95	25.46%	100.00° - 120.00°	0.00	0.00%
30.00° - 40.00°	51.76	7.17%	120.00° - 130.00°	0.00	0.00%
40.00° - 50.00°	14.05	1.95%	130.00° - 140.00°	0.00	0.00%
50.00° - 60.00°	11.03	1.53%	140.00° - 150.00°	0.00	0.00%
60.00° - 70.00°	15.53	2.15%	150.00° - 160.00°	0.00	0.00%
70.00° - 80.00°	5.67	0.78%	160.00° - 170.00°	0.00	0.00%
80.00° - 90.00°	1.43	0.20%	170.00° - 180.00°	0.00	0.00%
0.00° - 90.00°	722.31	99.99%	0.00° - 180.00°	722.36	100.00%

Candela Distribution

	0.00°	22.50°	45.00°	67.50°	90.00°	112.50°	135.00°	157.50°	180.00°	202.50°	225.00°	247.50°	270.00°	292.50°	315.00°	337.50°	360.00°
0.00°	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09	1,968.09
2.50°	1,911.65	1,935.68	1,917.51	1,923.19	1,909.60	1,925.52	1,913.42	1,927.65	1,921.30	1,944.57	1,927.32	1,929.25	1,917.62	1,928.12	1,914.80	1,924.15	1,911.65
5.00°	1,826.69	1,796.45	1,801.52	1,800.34	1,818.40	1,814.60	1,825.53	1,816.76	1,844.73	1,817.58	1,814.45	1,813.76	1,834.36	1,822.11	1,832.99	1,807.30	1,826.69
7.50°	1,641.06	1,638.51	1,622.80	1,636.84	1,644.34	1,642.85	1,625.86	1,650.02	1,668.52	1,669.94	1,629.30	1,650.01	1,661.89	1,657.97	1,627.60	1,641.48	1,641.06
10.00°	1,453.13	1,425.29	1,399.11	1,424.23	1,457.18	1,438.21	1,421.00	1,442.88	1,486.08	1,447.55	1,418.33	1,439.87	1,474.78	1,446.99	1,414.88	1,431.51	1,453.13
12.50°	1,239.84	1,213.59	1,189.45	1,211.47	1,244.65	1,211.38	1,196.23	1,221.50	1,258.08	1,216.68	1,187.77	1,209.68	1,251.38	1,229.44	1,199.47	1,218.20	1,239.84
15.00°	1,029.85	1,005.40	987.83	998.56	1,029.81	1,005.50	986.30	1,001.47	1,033.37	1,005.60	988.05	998.13	1,033.73	1,007.59	986.78	1,002.41	1,029.85
17.50°	841.37	817.07	829.95	824.65	847.41	810.91	819.43	801.59	825.27	795.62	807.70	792.99	827.41	820.79	830.93	824.45	841.37
20.00°	659.61	664.91	691.91	681.61	666.60	661.26	675.59	642.06	627.85	638.64	677.66	632.72	636.38	652.70	681.17	669.28	659.61
22.50°	508.07	527.73	593.57	555.19	514.55	530.97	584.11	497.43	468.64	483.74	572.76	483.91	469.68	510.70	589.37	537.32	508.07
25.00°	365.25	412.68	509.66	439.69	364.67	409.59	488.56	380.41	323.08	368.94	463.71	359.60	321.74	379.63	494.75	416.43	365.25
27.50°	250.93	306.10	412.50	326.14	244.95	291.22	385.71	271.36	214.22	256.95	353.01	239.64	197.81	264.25	383.85	308.91	250.93
30.00°	151.20	209.76	311.73	213.61	133.19	194.48	287.96	184.03	124.06	170.74	257.17	153.89	110.58	153.99	277.55	206.54	151.20
32.50°	88.30	131.48	224.72	132.59	81.92	103.12	197.64	101.18	74.20	92.66	165.90	72.17	61.92	93.09	190.02	130.75	88.30
35.00°	42.36	70.86	140.35	64.49	37.76	64.10	124.72	64.48	39.78	60.27	105.41	49.19	35.44	44.30	112.55	62.67	42.36
37.50°	30.41	37.21	87.14	37.96	29.48	34.59	72.50	33.99	31.70	33.02	51.78	29.47	28.11	31.06	65.96	38.80	30.41
40.00°	21.90	25.21	38.00	24.93	22.50	25.94	40.21	27.23	25.51	26.28	34.14	24.86	23.32	23.81	30.70	24.35	21.90
42.50°	18.88	18.23	25.30	19.76	20.18	19.64	27.14	22.33	21.90	20.65	22.02	20.32	20.30	20.01	22.07	19.41	18.88
45.00°	16.32	14.56	15.05	16.47	17.77	18.00	19.67	18.73	19.23	18.35	18.20	17.38	17.53	16.58	15.72	15.85	16.32
47.50°	14.36	12.45	13.52	14.75	15.08	16.60	16.63	15.23	17.64	16.09	15.15	14.56	14.92	14.21	13.70	13.46	14.36
50.00°	12.10	11.17	12.10	13.29	12.73	14.02	14.97	14.06	15.69	13.91	14.71	12.82	12.91	11.91	12.14	11.17	12.10
52.50°	9.53	10.36	11.10	12.35	11.09	11.58	14.20	12.96	13.41	12.47	14.36	11.38	11.18	11.47	11.28	10.82	9.53
55.00°	8.40	9.74	10.42	11.46	10.33	11.63	14.58	12.85	11.96	12.39	14.40	11.64	10.64	11.11	11.64	10.53	8.40
57.50°	8.52	10.85	13.19	12.70	11.09	12.01	15.54	13.14	11.12	13.33	14.59	12.35	10.52	12.04	13.52	10.62	8.52
60.00°	10.26	12.53	15.59	14.04	13.34	15.23	17.48	16.07	13.00	15.83	16.92	14.88	12.40	13.16	15.30	10.93	10.26
62.50°	13.15	14.34	15.77	16.20	17.68	18.12	19.81	18.59	16.56	17.50	18.86	16.80	14.82	15.87	16.98	13.87	13.15
65.00°	14.72	16.19	15.50	18.06	19.01	19.13	18.30	19.29	17.81	18.18	18.13	16.88	16.28	17.69	16.26	16.18	14.72
67.50°	15.53	14.64	13.28	15.24	16.93	18.39	15.61	18.01	18.00	15.66	15.85	15.14	17.49	15.14	13.56	14.41	15.53
70.00°	12.93	12.53	10.75	12.09	13.19	12.63	11.39	12.06	12.73	10.60	9.31	10.37	11.84	12.07	10.22	11.96	12.93
72.50°	9.12	8.92	7.52	7.56	8.22	8.08	7.32	7.19	7.00	5.97	5.37	6.48	6.86	7.93	6.56	7.75	9.12
75.00°	5.70	5.82	5.26	4.57	5.17	4.65	4.23	3.24	3.37	2.48	3.37	3.33	3.18	4.75	4.90	5.03	5.70
77.50°	3.80	3.67	3.75	3.09	3.09	2.99	2.70	2.38	2.38	1.68	2.38	1.99	2.23	2.49	3.70	3.43	3.80
80.00°	3.92	3.56	3.42	2.74	2.57	2.12	1.89	2.09	1.95	2.08	1.87	1.42	1.64	2.30	2.97	2.92	3.92
82.50°	2.58	2.81	2.76	2.35	1.92	1.57	1.37	1.61	1.18	1.31	1.51	1.18	1.12	1.77	2.05	2.54	2.58
85.00°	1.07	1.40	1.53	1.56	1.03	0.88	1.12	0.81	0.99	0.78	0.80	0.89	0.71	0.98	1.26	1.54	1.07
87.50°	0.85	0.84	0.84	1.24	0.68	0.84	0.88	1.13	0.80	0.80	0.62	0.85	0.88	0.88	0.82	0.98	0.85
90.00°	0.67	0.61	0.75	1.13	0.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.77	0.93	0.88	0.67
92.50°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95.00°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
97.50°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
102.50°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105.00°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
107.50°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110.00°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
112.50°	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Coefficients of Utilization – Zonal Cavity Method

Values are lumens delivered to the workplane.

RCR	pfc	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	0%
	pcc	80%	80%	80%	80%	70%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	0%
	pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	30%
	0	860	860	860	860	840	840	840	840	803	803	803	768	768	768	737	737	722
	1	823	805	788	773	806	789	774	761	760	748	737	733	724	715	709	701	695
	2	788	756	729	707	772	744	720	699	721	701	684	699	683	670	680	667	656
	3	755	714	682	656	741	704	674	651	685	661	640	668	648	631	652	635	621
	4	724	676	641	615	712	668	636	611	653	626	604	639	616	597	626	607	590
	5	696	643	607	580	685	637	603	577	625	595	572	613	588	568	602	580	563
	6	669	614	577	550	659	609	574	548	598	568	545	589	562	541	580	556	538
	7	644	587	550	524	636	583	548	523	574	543	520	566	538	518	559	534	515
	8	621	563	526	501	613	559	524	500	552	521	498	545	517	496	539	513	494
	9	599	541	505	480	592	537	503	480	531	500	478	525	497	477	520	494	475
	10	579	520	485	461	573	517	484	461	512	481	460	507	479	459	502	476	457

Cone of Light

Mtg Height	Light Level	Beam Diameter
5.5 ft	65.1 fc	3.1 ft
6.5 ft	46.6 fc	3.6 ft
7.5 ft	35.0 fc	4.2 ft
8.0 ft	30.8 fc	4.5 ft
10.0 ft	19.7 fc	5.6 ft
12.0 ft	13.7 fc	6.7 ft
14.0 ft	10.0 fc	7.8 ft
16.0 ft	7.7 fc	8.9 ft
20.0 ft	4.9 fc	11.2 ft
24.0 ft	3.4 fc	13.4 ft
28.0 ft	2.5 fc	15.7 ft

Average Luminaire Luminance [cd/m²]

	0.00°	45.00°	90.00°
0.00°	827,515	827,515	827,515
45.00°	9,702	8,948	10,566
55.00°	6,154	7,639	7,572
65.00°	14,642	15,420	18,917
75.00°	9,260	8,550	8,391
85.00°	5,186	7,373	4,969

UGR CIE 190:2010

Ceiling reflectance		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall reflectance		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Plane reflectance		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
2H	2H	11.9	12.8	12.2	13.2	13.5	12.9	13.9	13.3	14.2	14.5
	3H	16.8	17.7	17.2	18.0	18.4	17.4	18.3	17.8	18.6	19.0
	4H	17.4	18.2	17.8	18.5	18.9	17.7	18.5	18.1	18.8	19.2
	6H	17.6	18.4	18.1	18.8	19.1	17.7	18.4	18.1	18.8	19.2
	8H	17.8	18.5	18.2	18.8	19.3	17.7	18.4	18.1	18.8	19.2
	12H	17.8	18.5	18.2	18.8	19.3	17.7	18.4	18.1	18.7	19.2
4H	2H	14.1	14.9	14.5	15.3	15.7	15.1	16.0	15.6	16.3	16.7
	3H	17.9	18.6	18.3	19.0	19.4	18.4	19.1	18.8	19.5	19.9
	4H	18.4	19.0	18.9	19.4	19.9	18.6	19.2	19.1	19.6	20.1
	6H	18.7	19.2	19.2	19.7	20.2	18.7	19.2	19.2	19.6	20.1
	8H	18.9	19.3	19.3	19.8	20.3	18.7	19.2	19.2	19.6	20.1
	12H	18.9	19.3	19.4	19.8	20.3	18.7	19.1	19.2	19.6	20.0
8H	4H	18.5	19.0	19.0	19.4	19.9	18.6	19.1	19.1	19.5	20.0
	6H	18.9	19.3	19.4	19.8	20.3	18.7	19.1	19.2	19.6	20.1
	8H	19.1	19.5	19.7	20.0	20.5	18.7	19.1	19.3	19.6	20.1
	12H	19.3	19.5	19.8	20.0	20.6	18.8	19.0	19.3	19.5	20.1
12H	4H	18.5	18.9	19.0	19.4	19.8	18.6	19.0	19.1	19.5	19.9
	6H	18.9	19.2	19.4	19.7	20.3	18.7	19.0	19.2	19.5	20.0
	8H	19.2	19.5	19.7	20.0	20.5	18.7	19.0	19.2	19.5	20.1

Corrected UGR values based on total output lumens

SHR = 1.0